


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SPECIAL MEANDER Corner of Section 15, Township 141, Range 29, 5th P.M.
 STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 12/17/80 found a GLO brass cap monument as set in 1918.
DATE
- left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

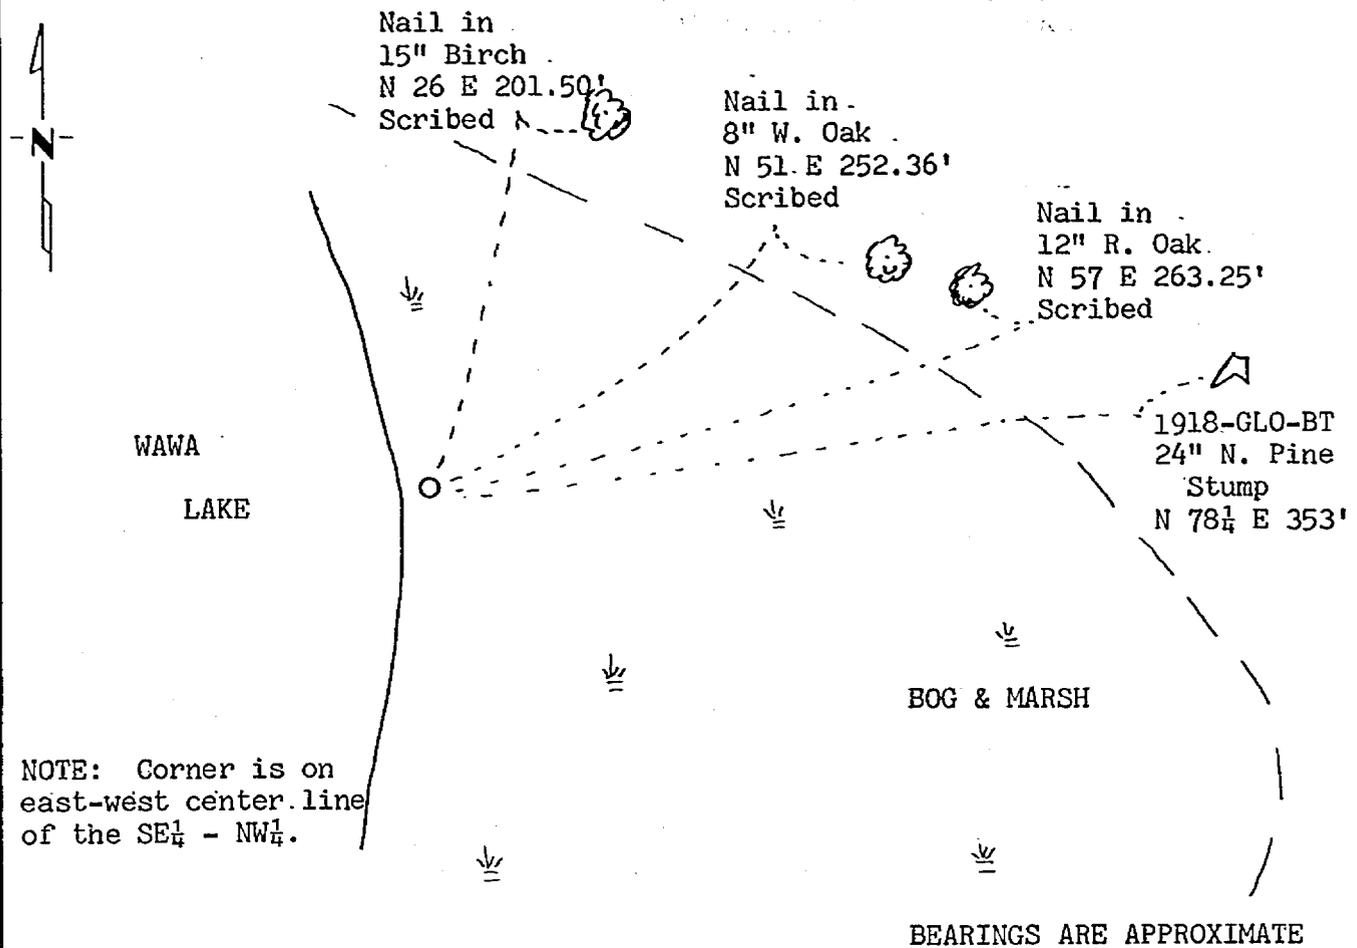

NOTE: Corner is on east-west center line of the SE $\frac{1}{4}$ - NW $\frac{1}{4}$.

Statement of evidence relative to this corner location is on back of page.

260994

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Nancy H. Stevenson 12-15-81
SIGNATURE DATE

Registration No. 12684

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 9:22 A.M. on the 31 day of Dec. A.D., 1981

County Recorder Burdah Handrick

By MS, Deputy

DOCUMENT NO. 260994

Statement of Evidence:

- 1918 U.S. General Land Office dependent resurvey established this corner and an iron pipe with a marked brass cap was set to mark the corner. The following bearing trees were marked: 5" N. Pine N 78-15 E 538 links.
- 1980 USFS technician W. Olson found marked GLO brass cap monument down 1½' under water in bog with 2" iron pipe on west side down 1'. Stump of N. Pine bearing tree found with lower scar, but tree had been cut too low to leave any scribing. Three new bearing trees were marked and are shown on this certificate.
- 1981 On Dec. 8, I visited corner and found items as per 1980 USFS report.
- 1981 County Surveyor's Records in the Recorder's Office were checked and no resurvey information was found on this corner.