

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

MC Corner of Section 2, Township 141, Range 30, 5 P.M.

STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch:

On 9-17-81 found a 1"x36" iron pipe with brass cap standing in  
DATE good condition.

left monument as found,  lowered monument,  removed monument (explain)

On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

### SKETCH OF REFERENCE TIES

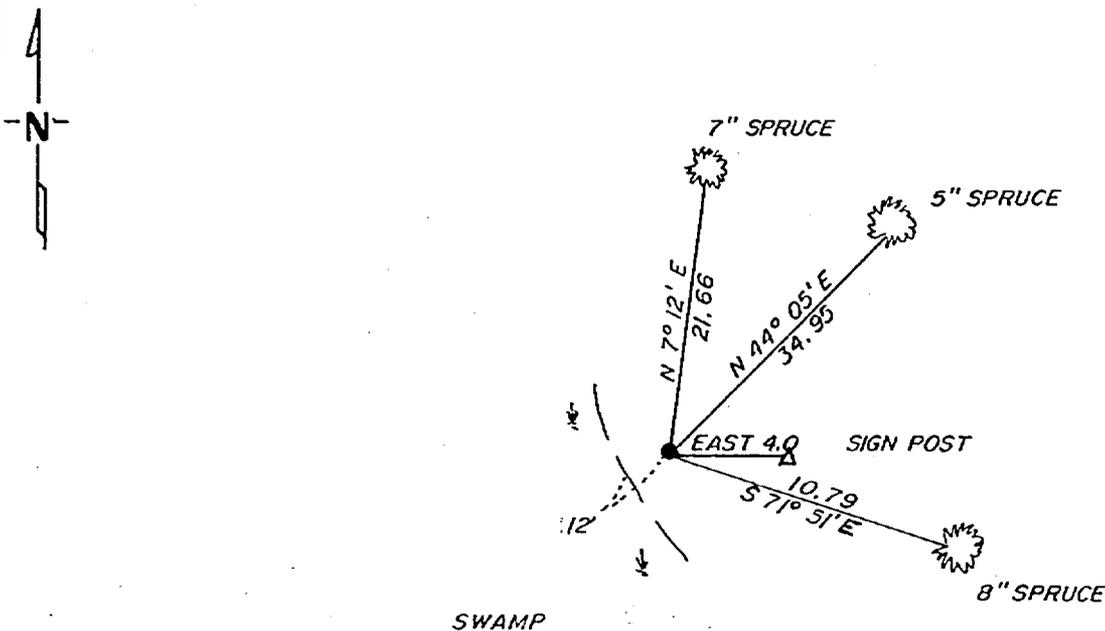

NOT TO SCALE

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Lewis 12-8-81  
SIGNATURE DATE

Registration No. 11395

Land Surveyor,  Professional Engineer

County Surveyor,  County Engineer

26 2629  
 OFFICE OF THE REGISTER OF DEEDS  
 County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 1:35 P.M. on the 7 day of May A.D., 19 82

Register of Deeds Beverly Handman  
 By M S, Deputy

DOCUMENT NO. 26 2629

In 1917, Earl G. Harrington, a US Surveyor set a 1"x36" iron pipe with brass cap for the MC on north line of Sec. 2 from which he made the following BT's  
A 6" white oak north 44 LKS and a 14" balsam S 41 E 89 LKS.

On September 17, 1981 Walter E. Curo and Paul Johnson find the brass cap standing in good condition. Find no trace of original BT's. We made new BT's as shown on front.