

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


AP 1 TR 1320 Corner of Section 12, Township 141, Range 30, 5 P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 10-19-81 found a 1"x36" brass cap monument 2' below surface and bent, <sup>DATE</sup> replaced it with a 2"x36" iron pipe with brass cap
  - left monument as found,  lowered monument,  removed monument (explain)
- On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

### SKETCH OF REFERENCE TIES

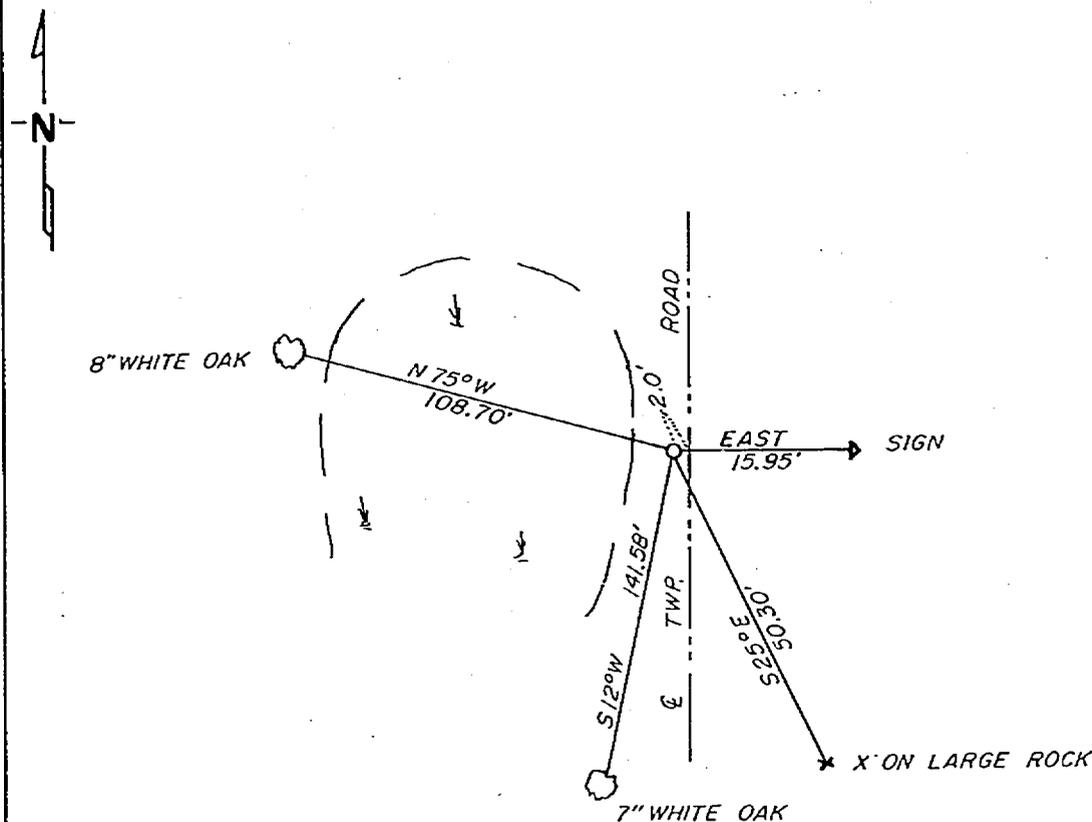

not to scale

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter S. Lewis 12-8-81  
SIGNATURE DATE

Registration No. 11395

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

262645  
OFFICE OF THE REGISTER OF DEEDS  
County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 2:47 P.M. on the 7 day of May A.D., 1982

Register of Deeds Dorothy Henderson  
By M.S., Deputy

DOCUMENT NO. 262645

In 1917, Earl G. Harrington, a US surveyor set a 1"x36" iron pipe with brass cap for AP 1 TR 1320. No BT's were made.

On October 19, 1981, Walter Curo and Paul Johnson find the brass cap monument 20" below surface of the township road. We pull it out and set a 2"x36" iron pipe with brass cap on top 2' west of centerline. We mark BT's as shown on front.