

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


East Quarter \_\_\_\_\_ Corner of Section 6, Township 145 N, Range 29 W, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On \_\_\_\_\_ found a \_\_\_\_\_  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On 11/20/81 placed a 2" x 5' iron pipe with brass cap  
DATE

### SKETCH OF REFERENCE TIES

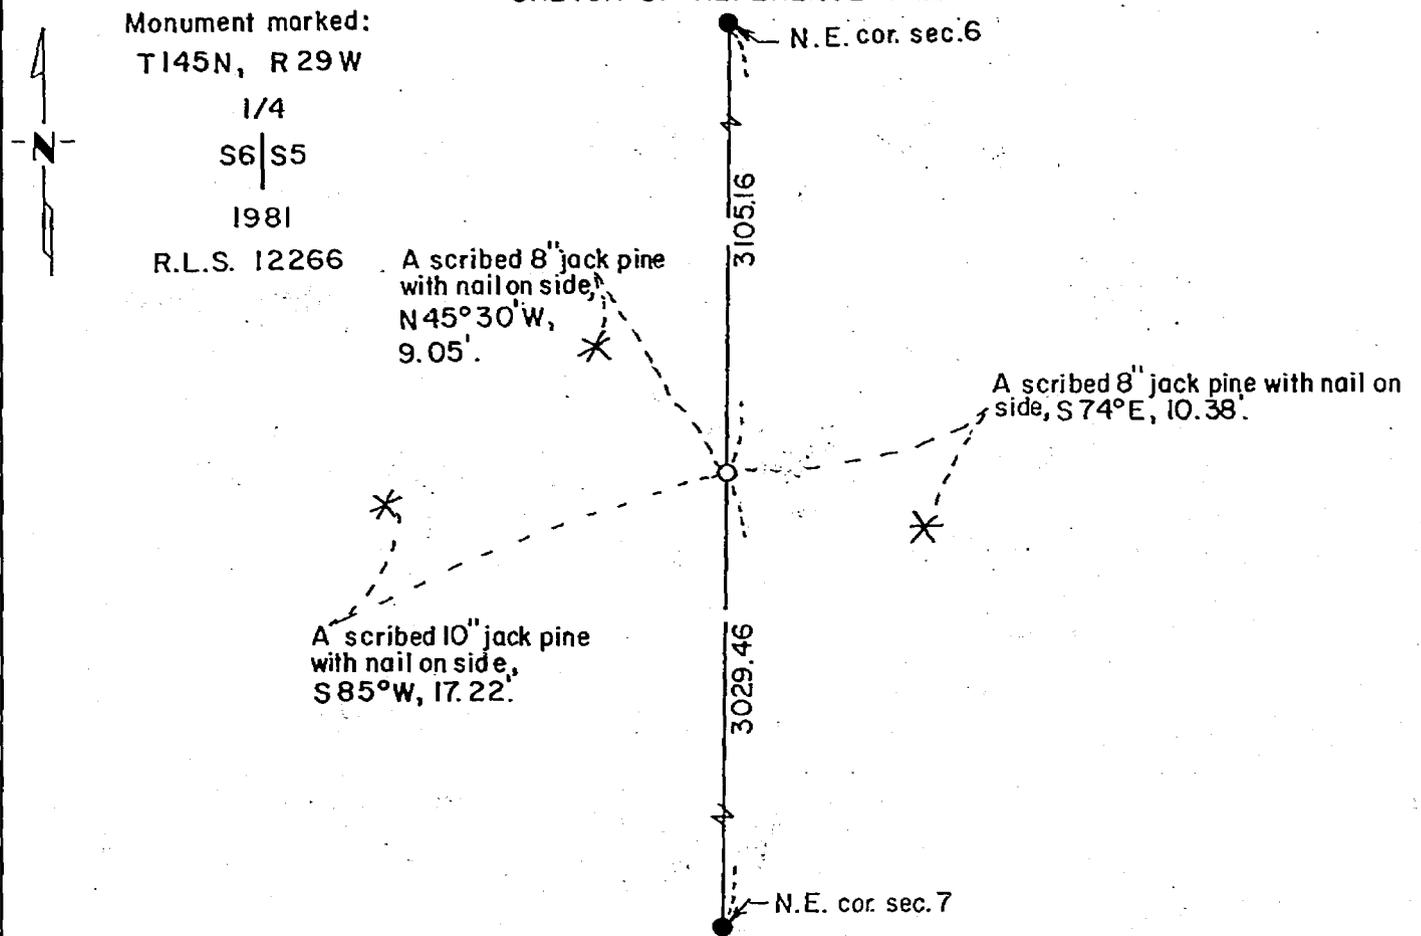

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Anthony E. Keick 11/30/81  
SIGNATURE DATE

Registration No. 12266

- Land Surveyor,  Professional Engineer  
 County Surveyor,  County Engineer

265247  
 OFFICE OF THE COUNTY RECORDER  
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 9:20 A.M. on the 29 day of Sept. A.D., 1982

County Recorder Dorothy Herdine County Recorder

By MS, Deputy

DOCUMENT NO. 265247

Statement of Evidence:

EAST QUARTER CORNER OF SECTION 6, TOWNSHIP 245 NORTH,  
RANGE 29 WEST OF THE 5th PRINCIPAL MERIDIAN.

The original Public Land Survey was run in 1874 by Bonger. He placed a wood post to mark the corner and recorded two bearing trees as accessories: an 18 inch Yellow Pine South 56 degrees West 70 links, a 6 inch Black Pine North 40 degrees East 50 links.

In 1981, A. Kerick, made a Line to Standard Survey for the U.S. Forest Service. A line was run from the Southeast corner of Section 6 to the Northeast corner of Section 6. In the original survey Bonger called this line out as 81 chains or 5346 feet. My line measured 6134.57 feet. A search was made for the original corner at 40 chains North from the Southeast corner of Section 6 and also at 41 chains South of the Northeast corner of Section 6. Both of these locations fall in a swamp. There was no mention of any wet lands in the original notes. I found no evidence of the original corner or the accessories. I set a marked brass cap on a 5 foot long, 2 inch diameter, iron post at a lost position proportionate measure and recorded the following bearing trees as accessories: an 8 inch Jack Pine North 45 degrees 30 minutes West 9.05 feet, a 10 inch Jack Pine South 85 degrees West 17.22 feet, an 8 inch Jack Pine South 74 degrees East 10.38 feet.

An analysis of the above data indicates that the location of this Public Land Survey corner has not been perpetuated by original evidence. It has been established by Rules for Establishing Lost Corners Single Proportion Measurement.