


**CERTIFICATE OF LOCATION OF GOVERNMENT CORNER**East 1/16 th Corner of Section 6-7, Township 145N, Range 29 W, 5th P.M.STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On \_\_\_\_\_ found a \_\_\_\_\_  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On 11/20/81 placed a 2" x 5' iron pipe with brass cap  
DATE

## SKETCH OF REFERENCE TIES

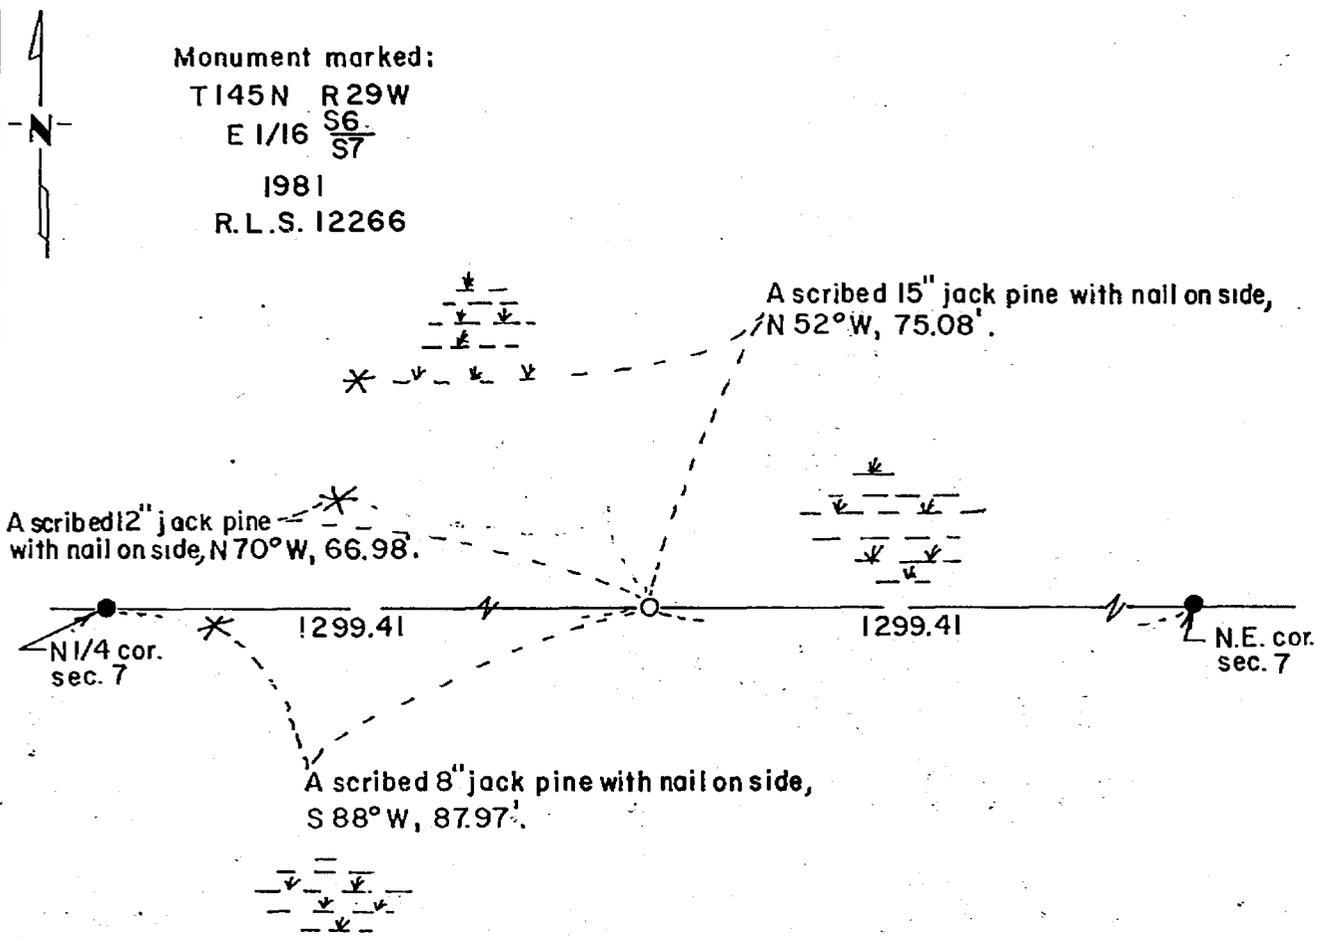

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Anthony E. Keivick 11/30/81  
SIGNATURE DATE

Registration No. 12266 Land Surveyor,  Professional Engineer County Surveyor,  County Engineer

265256  
OFFICE OF THE COUNTY RECORDER  
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 9:35 A.M. on the 29 day of Sept. A.D., 1982County Recorder Brenda Handwerker  
By MS DeputyDOCUMENT NO. 265250

Statement of Evidence:

EAST 1/16 CORNER, OF SECTION 5-6, TOWNSHIP 145 NORTH,  
RANGE 29 WEST, OF THE 5th PRICIPAL MERIDIAN.

In 1981, A. Kerick made a Line to Standard Survey for the U. S. Forest Service. He set the East 1/16 corner midway and on line between the North  $\frac{1}{4}$  corner of Section 7 and the Northeast corner of Section 7. He set a marked brass cap on a 5 foot long, 2 inch diameter, iron post and recorded the following bearing trees as accessories: a 15 inch Jack Pine North 52 degrees West 75.08 feet, a 12 inch Jack Pine North 70 degrees West 66.98 feet, an 8 inch Jack Pine South 88 degrees West 87.97 feet.

An analysis of the above data indicates that a corner was set that was not placed by the original Public Land Survey, but placed in its true position according to the Public Land Survey System.