

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/16 Corner of Section 12 1/2, Township 143, Range 31, 5th P.M.

STATE OF MINNESOTA, County of Cass


At the corner location shown on the sketch:

On 12-27-1982 found a 1" iron pipe with brass cap
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

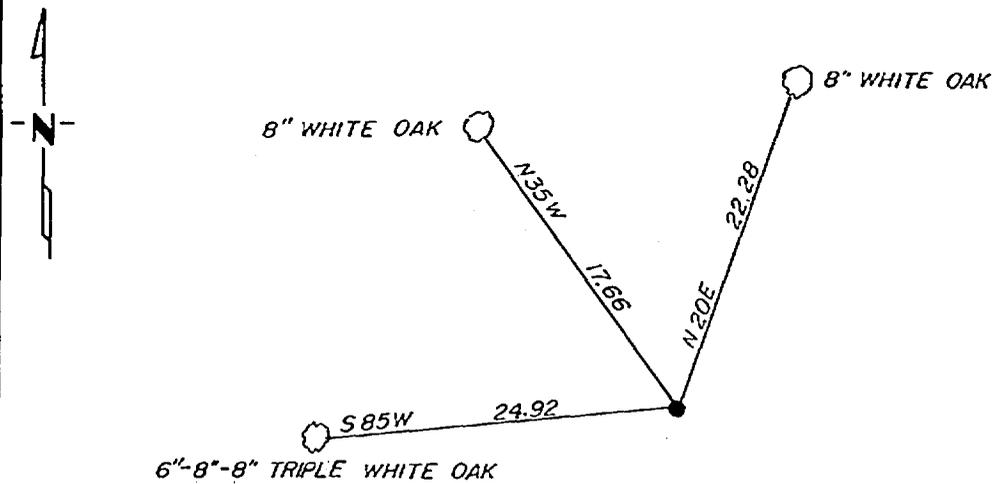

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Curro 3-18-83
SIGNATURE DATE

Registration No. 11395

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

268839
OFFICE OF THE REGISTER OF DEEDS
County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 2:40 P.M. on the 18 day of May A.D., 1983

Register of Deeds Cloudbine Kaylor

By MS, Deputy

DOCUMENT NO. 268839

Statement of Evidence:

In 1919, Albinus N. Kimmel, a US cadastral engineer set a 1"x36" iron pipe with brass cap for the E 1/16 corner from which he marked the following bt's, a 8" jackpine S 36-1/2 E 63 links and a 8" jackpine N 33-1/2 W 82 links

On 12-27-1982, Walter E. Curo, a registered land surveyor and Ken Metcalf found the 1" iron pipe with brass cap standing in good condition. We find rotted stump S 36-1/2 E 63 links. No trace of the other tree. We mark new bt's as shown on the front.