


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

CW 1/16 Corner of Section 7, Township 143, Range 30, 5th P.M.
STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On 3-1-1983 found a 1" iron pipe with brass cap
DATE
- left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

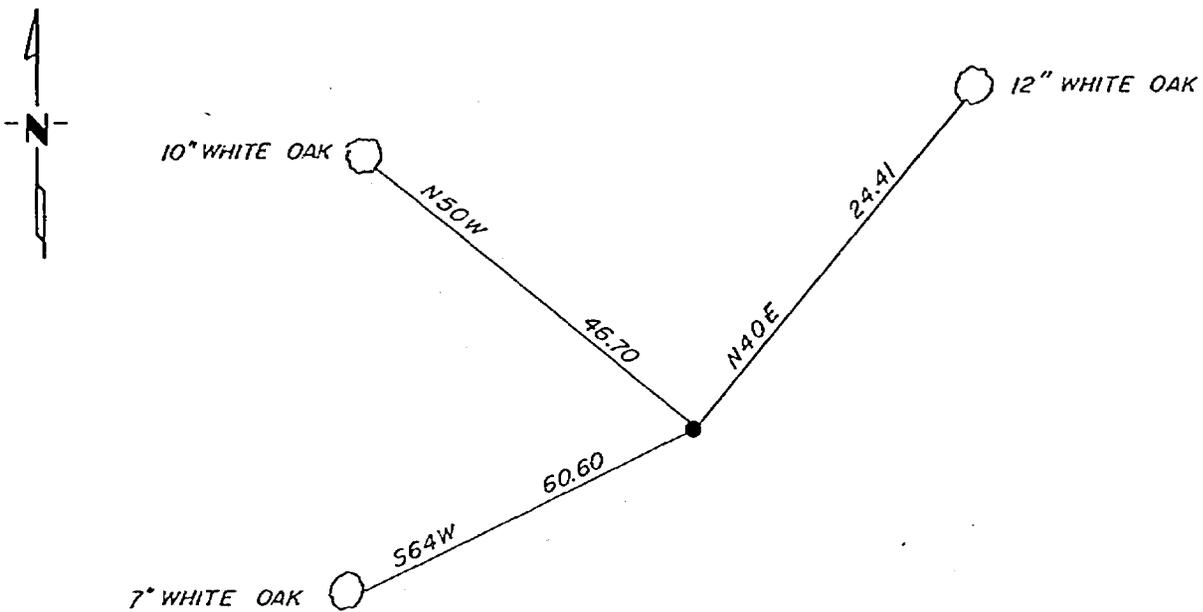

Statement of evidence relative to this corner location is on back of page. 268851

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Brown 3-18-83
SIGNATURE DATE

Registration No. 11395

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS
County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 3:40 P.M. on the 18 day of May A.D., 1983

Register of Deeds Clouline Kayler

By MS, Deputy

DOCUMENT NO. 268851

Statement of Evidence:

In 1920, Earl Harrington, a US surveyor set a 1"x36" iron pipe with brass cap for the CW 1/16 corner from which he marked the following bt's, a 10" poplar N 79-15 W 5 links and a 10" poplar S 47-1/2 E 14 links.

On 3-1-1983, Walter E. Curo, a registered land surveyor and Ken Metcalf found the 1" iron pipe with brass cap standing in good condition. We find the remains of the 10" poplar S 47-1/2 E 14 links, no trace of the other poplar, We mark new bt's as shown on the front.