


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S $\frac{1}{4}$ Corner of Section 2, Township 139, Range 30, 5th P.M.
STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On 10-9-84 found a 2"x5' galvanized iron pipe lying in the
DATE power line
- left monument as found, lowered monument, removed monument (explain)
- On 10-10-84 placed a cass county cast iron monument flush
DATE with the ground in the centerline of power line

SKETCH OF REFERENCE TIES

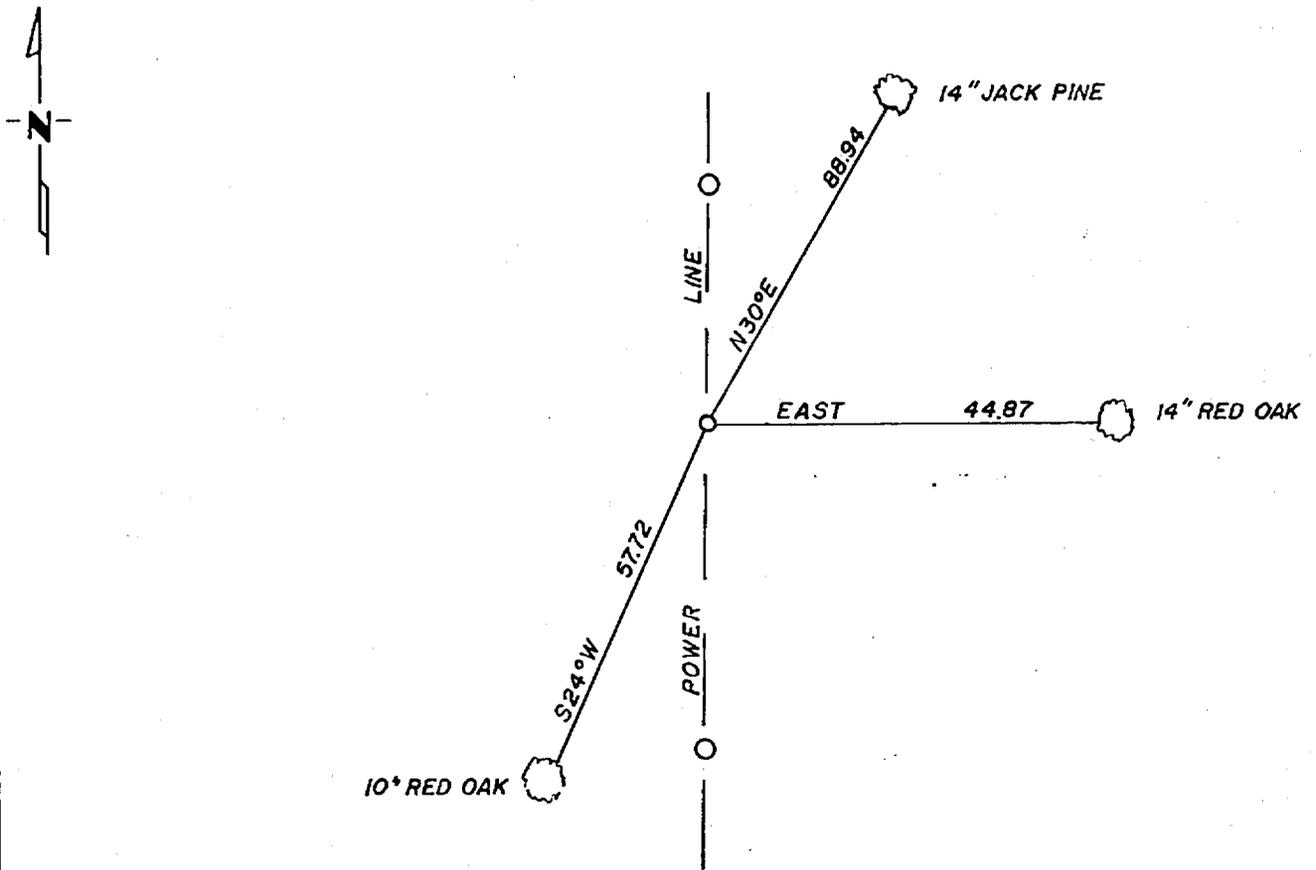

not to scale

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Cass 10-30-84
SIGNATURE DATE

Registration No. 11395

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

228539
OFFICE OF THE REGISTER OF DEEDS
County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 10:20 A.M. on the 31 day of Oct. A.D., 1984

Register of Deeds Cherline Kayler

By MS, Deputy

DOCUMENT NO. 228539

Statement of Evidence:

In July 1925 John M. Greene set a 2"x5" capped galvanized pipe for the South Quarter of Section 2 from the original bearing trees, a Norway Pine 24" South 21½ degrees East 2.64 feet and a Norway Pine 24" North 71 degrees West 4.62 feet.

In 1951 Harold Curo found this capped galvanized iron pipe with the stumps of the original bearing trees still there.

In 1984 Walter E. Curo found the 2"x5' monument bent and lying flat on the ground in the power line. The remains of both Pine bearing trees are still in place but they have been damaged by a power line brushing crew. We set a Cass County cast iron monument flush with the ground from these stumps and marked new bearing trees as shown on the front.