

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

A.P. #2 of TR 242 Corner of Section 30, Township 144, Range 30, 5th P.M.

STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch:

On 3/2/81 found a GLO brass cap monument as set in 1930.
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

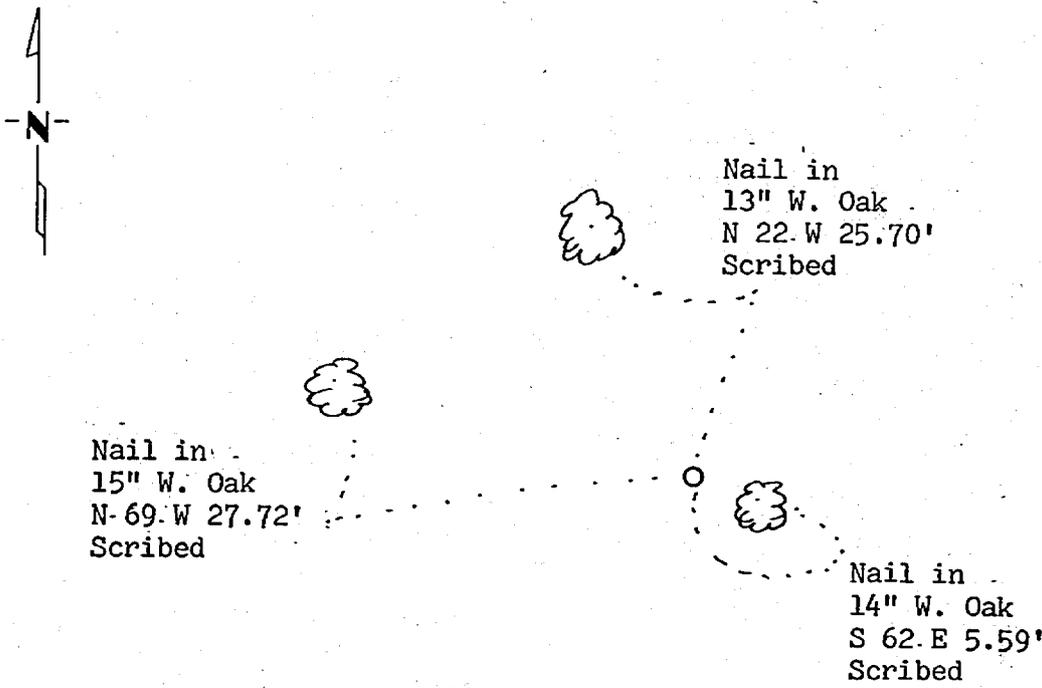

BEARINGS ARE APPROXIMATE

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Gay A. Stevenson 9-15-82
SIGNATURE DATE

Registration No. 12684

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

279381
OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 4:15 P. M. on the 10 day of Dec. A.D., 1984

County Recorder Cloude Kayler
By MS, Deputy

DOCUMENT NO. 279381

Statement of Evidence:

- 1930 U.S. General Land Office dependent resurvey established this corner and an iron pipe with a marked brass cap was set to mark the corner.
- 1981 U.S. Forest Service technician G. Brama found the corner monumented with a GLO brass cap monument in good condition up 2". Three new bearing trees were marked and are shown on this certificate. Steel sign posts were set 3.5' east and 3.1' north of the corner.
- 1982 U.S. Forest Service technician G. Brama ran line from CS 1/16 corner of Section 30 to this corner and then north to the NE corner of Government Lot 9. Distance was roughed chained to the CS 1/16 corner. Line and distance checked good with the 1930 GLO resurvey record.
- 1982 Analysis of the U.S. Forest Service information indicates that the monument was found in the same position as when set in 1930.
- 1982 County Surveyor's Records in the Recorder's Office were checked and no resurvey information was found.