

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


Northeast Corner of Section 21, Township 134, Range 30, 5th P.M.
 STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 5/16/1983 found a rock pile, S24°E GLO B.T. and SW 1911 B.T. stub
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 5/16/1983 placed a 1½"x1½"x20" steel tube with aluminum cap (stamped
DATE
DNR Survey Monument)


SKETCH OF REFERENCE TIES

Azimuths assumed using 6° Declination Not to scale
 New B.T.s have nail & DNR disc in side

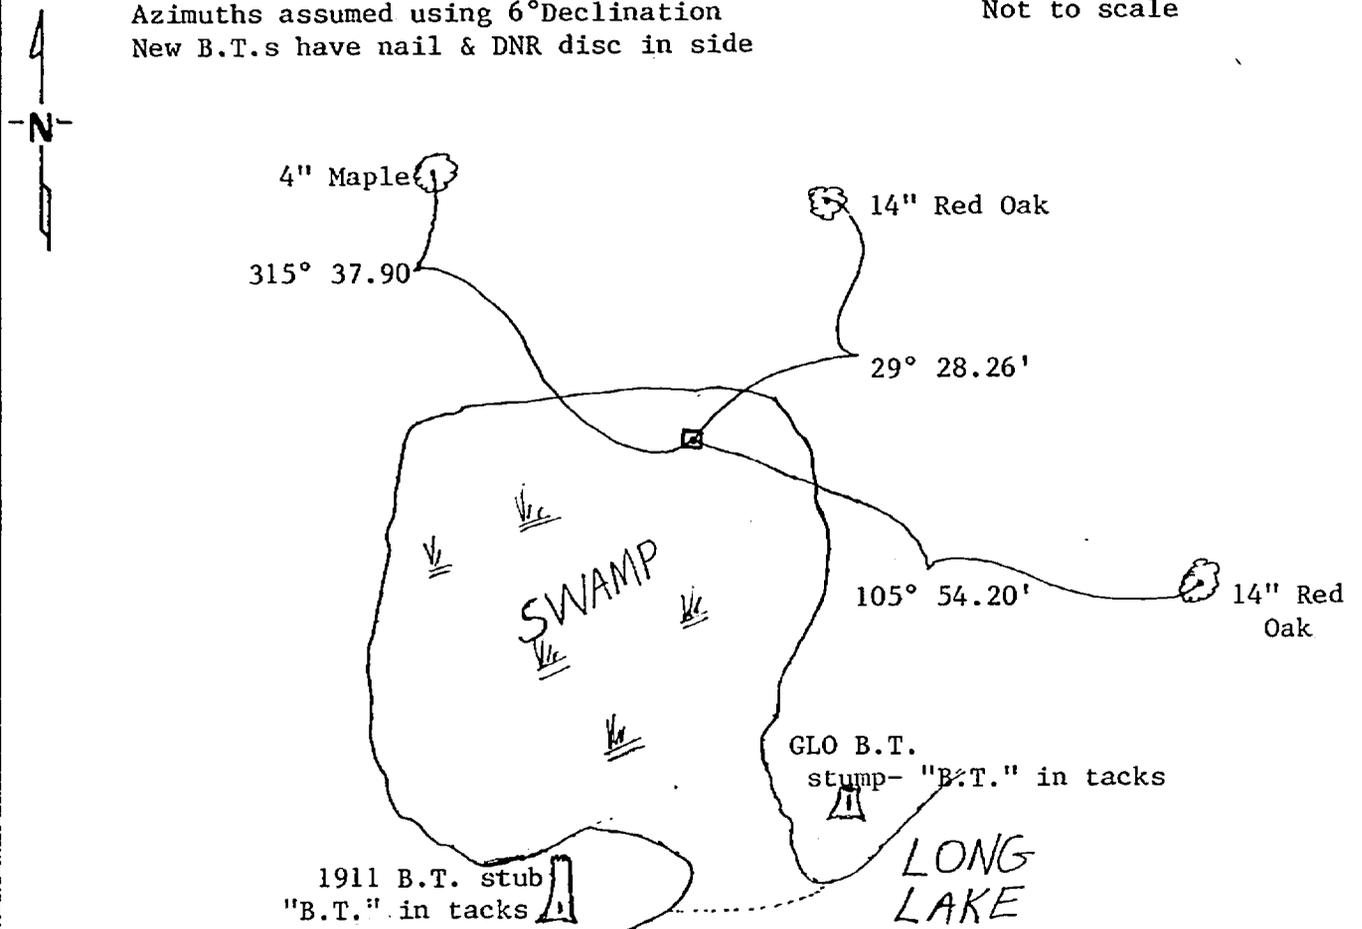

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.


SIGNATURE 3/29/85
DATE

Registration No. 12684
 Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

281036
 OFFICE OF THE REGISTER OF DEEDS
 County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 4:10 A.M. on the 29 day of March A.D., 1985

Register of Deeds Cloude K. Ogilby
 By MS, Deputy

DOCUMENT NO. 281036

STATEMENT OF EVIDENCE

- 1868 U.S. General Land Office Survey set a wood post for this corner and marked the following bearing trees: 14" Pine S24°E 61 lks. (40.26') 26" White Pine N5°E 75 lks., 30" Pine S63°E 95 lks.
- 1911 County Survey Record Book "A" pages 465-472, show a survey by A.W. Moulster. He found the old government B.T. stumps, set a 3"x3"x24" Poplar stake in a pile of rocks and marked the following new trees: 8" Poplar N81°E 61.50', 6" Norway Pine S15°32'W 166.26'. He made his "B.T." mark with tacks and freshened the old "B.T." with his jack knife and drove tacks in the mark.
- 1983 A DNR survey crew found a pile of rocks in a swamp from which they found the S24°E government B.T. stump with tacks in the "B.T." and the stub of the 1911 Pine B.T. (now 18") with "B.T." in tacks. They set a 1½"x1½"x20" perforated steel tube with aluminum cap stamped "DNR Survey Monument", and marked the following trees: 4" Maple 315° 37.90', 14" Red Oak 29° 28.26', 14" Red Oak 105° 54.20'
- 1983 On Sept. 8, Survey Technician Terry Freeman and Forester Dan Marcum found the DNR monument and their ties. They used this corner and traversed north to establish the East line of Section 16.