

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 23, Township 144N., Range 25W., 5th P.M.


STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On \_\_\_\_\_ found a \_\_\_\_\_  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On 12-11-1984 placed a 5/8" by 8 feet long Aluminum Rod with 3" Aluminum Cap  
DATE  
stamped as shown, up 0.80 feet.

5° EAST Declination

SKETCH OF REFERENCE TIES  
NOT TO SCALE

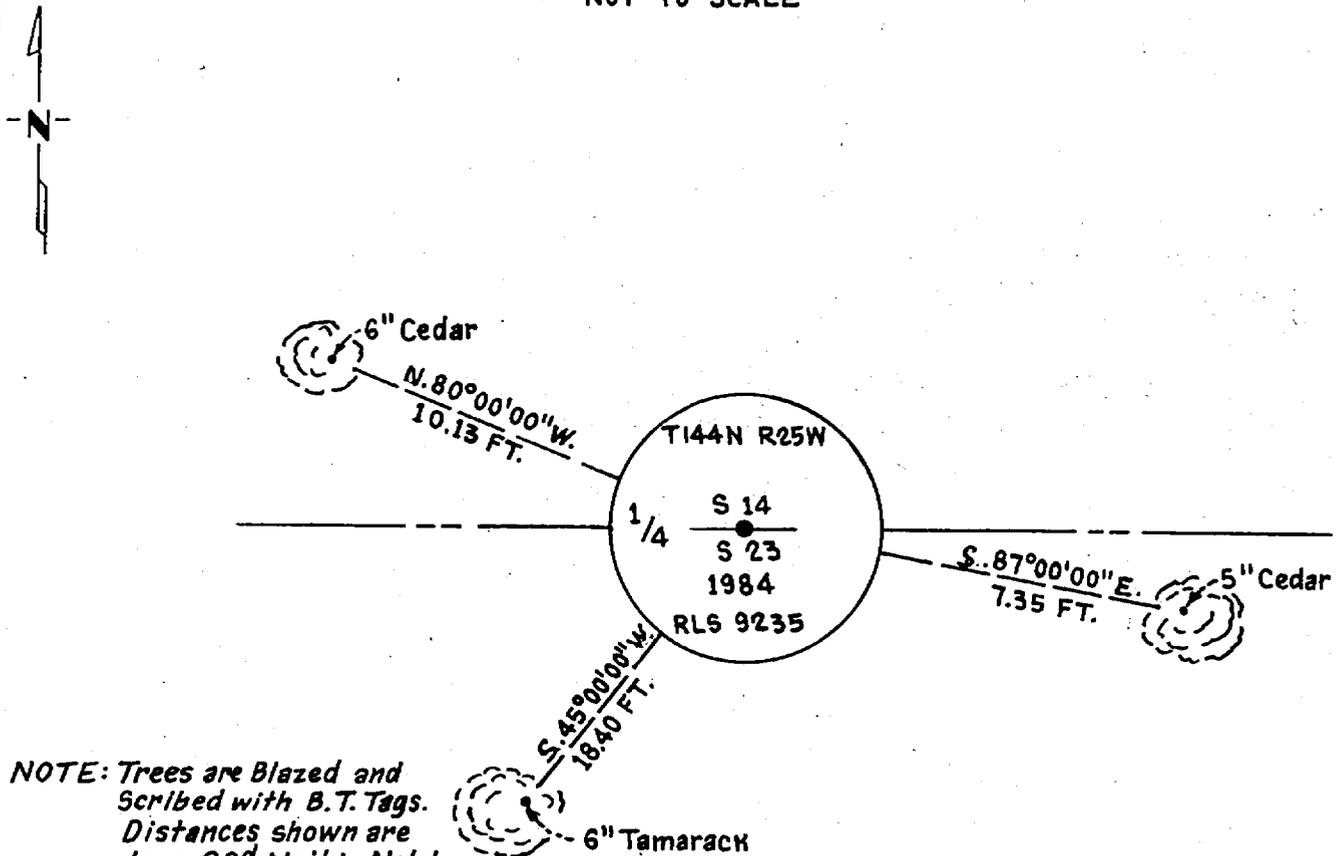

NOTE: Trees are Blazed and Scribed with B.T. Tags. Distances shown are to a 20<sup>d</sup> Nail in Notch painted red on side of Tree.

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

James H. Parker SIGNATURE 3/29/85 DATE

Registration No. 9235

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

281945  
OFFICE OF THE COUNTY RECORDER  
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 9:00 A.M. on the 15 day of May A.D., 19 85

County Recorder Claudia Koyler  
By MS, Deputy

DOCUMENT NO. 281945

Statement of Evidence:

N19

This corner was originally established in April, 1876, by B.C. Baldwin, Deputy Surveyor. The field notes of that survey are filed in the office of the Secretary of State, St. Paul, Minnesota. Mr. Baldwin's notes state that a post was set to mark the corner and referenced by the following:

A 10" Tamarack that bears N1°W a distance of 20 links [13.20 feet]  
A 5" Tamarack that bears S75°W a distance of 9 links [5.94 feet]

In 1900, A Map of survey by the Corps of Engineers shows that they found the corner.

On July 6, 1984, personnel from Advance Surveying & Engineering Co. made a thorough search for this corner and the above mentioned references but to no avail. This area is all Tamarac, Cedar and Spruce swamp.

On December 11, 1984, an additional search was made by Advance prior to reestablishing this corner by Obliterated methods by using coordinate position determined from Corps of Engineers Survey done in 1900.