

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

South 1/4 Corner of Section 26, Township 144N, Range 25W, 5th P.M.


STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 9-27-1984 placed a 5/8"x36" aluminum rod with 3" aluminum cap
DATE stamped as shown Down .30' on E Co. Rd #3

5° East declination

SKETCH OF REFERENCE TIES
Not to Scale

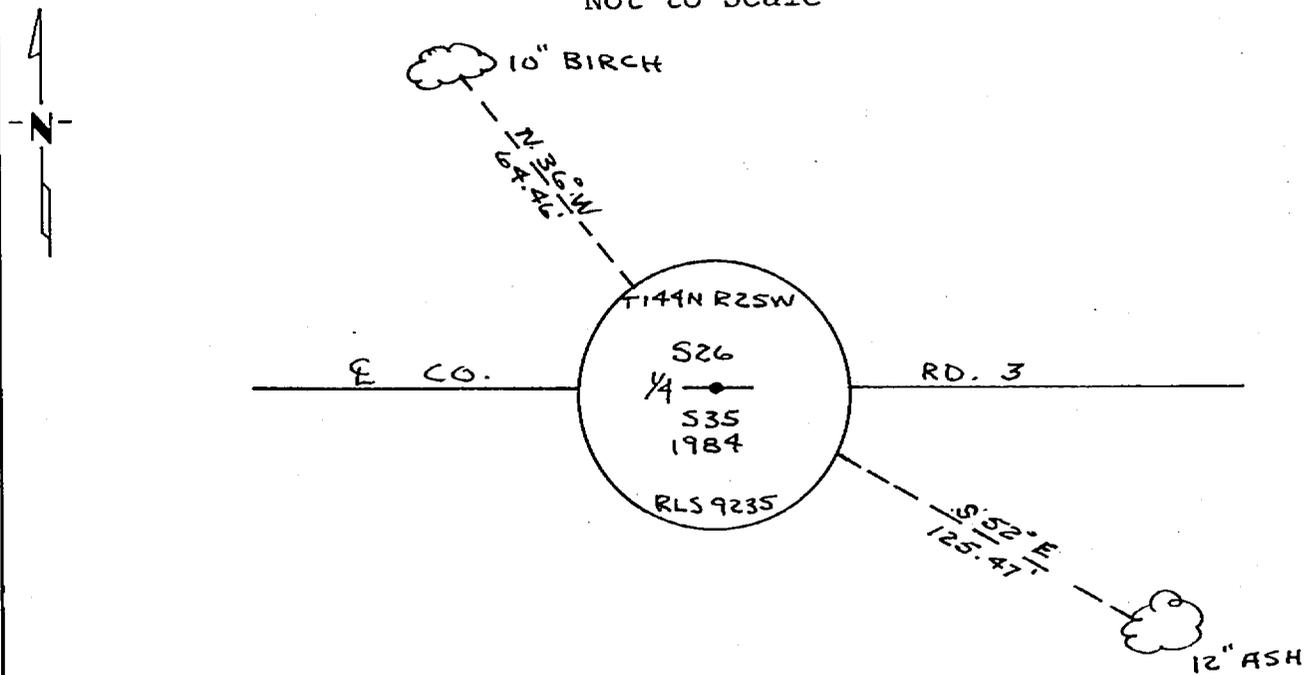

Note:

Trees are blazed & scribed with B.T. tags. Distances shown are to a 20^d nail in notch painted red on side of tree.

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

James H. Parker 3/29/85
SIGNATURE DATE

Registration No. 9235

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

281979
OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 11:55 A.M. on the 15 day of May A.D., 19 85

County Recorder Claudia Kayler

By MS, Deputy

DOCUMENT NO. 281979

Statement of Evidence:

V19

This corner was originally established in April, 1876, by B.C. Baldwin, Deputy Surveyor. The field notes of that survey are filed in the office of the Secretary of State, St. Paul, Minnesota. Mr. Baldwin's notes state that a post was set to mark the corner and referenced by the following:

A 6" Aspen that bears N71°W a distance of 27 links [17.82 feet]
A 5" Aspen that bears S88°W a distance of 26 links [17.16 feet]

On August 13, 1984, personnel from Advance Surveying & Engineering Co. made a thorough search for this corner and the above mentioned references but to no avail.

On September 27, 1984, an additional search was made by Advance prior to reestablishing this corner position as obliterated using feature call to river and the centerline of County Road. 3.