

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


Northeast Corner of Section 28, Township 135 N., Range 32 W., 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 8/30/85 found a 1 1/2" I.P. top 1.5' bent SE, in line with centerline
DATE
road north
 - left monument as found, lowered monument, removed monument (explain)
- On 11/14/85 placed a 2" square monument with stamped aluminum cap
DATE
inplace of bent iron pipe

SKETCH OF REFERENCE TIES

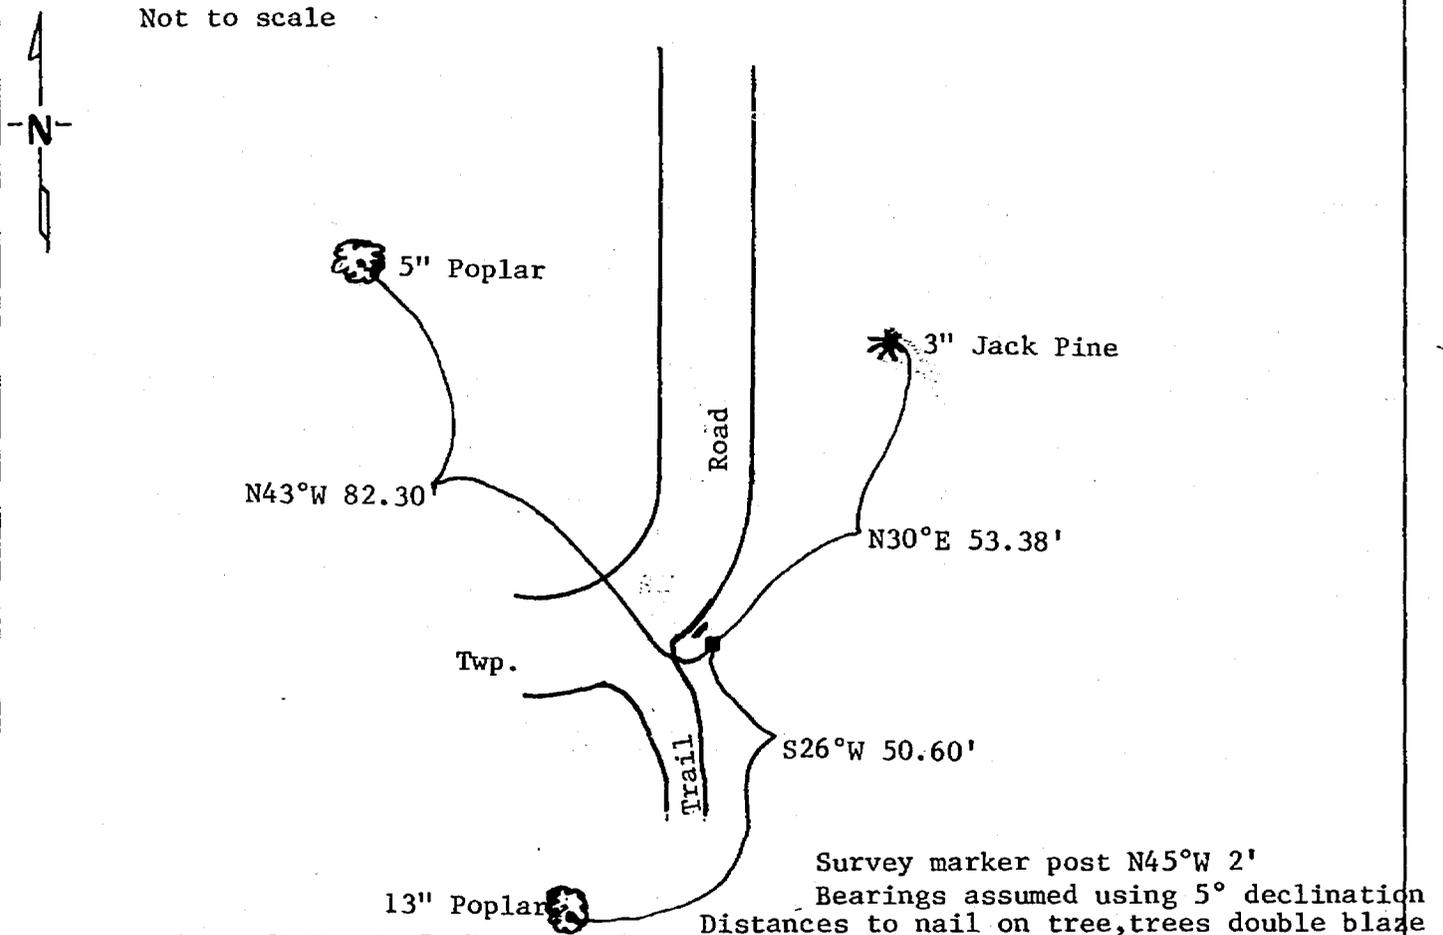

Statement of evidence relative to this corner location is on back of page. 286247

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter L. Olson 11-29-85
SIGNATURE DATE

Registration No. 11395

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 4:05 P.M. on the 9 day of Dec. A.D., 19 85

Register of Deeds Claudine Kaylor
 By MS, Deputy

DOCUMENT NO. 286247

STATEMENT OF EVIDENCE Northeast Corner Section 28, T.135N., R.32W., 5th P.M.

- 1866 U.S. General Land Office survey set a wood post for this corner and marked the following bearing trees: 10" Aspen S72°E 34 lks., 8" Tam. N37°E 69 lks., 10" Tam. N4°W 36 lks.
- 1915 County Survey Record Book "C" page 48, shows a survey by E.B. Horst. He set a 1½x48" I.M.
5" Jack Pine N11°30'E 54'
5" Poplar S25°25'E 46.2'
- 1915 County Survey Record Book "C" page 572, shows a survey by Roy Bryant. He found the corner.
- 1985 On August 30, Terry Freeman, Cass County Survey Technician and Dan Marcum, County Forester, found a 1½" I.P., top 1.5' bent SE
5" Poplar N43°W 82.30'
3" Jack Pine N30°E 53.38'
13" Poplar S26°W 50.60'
Survey Marker sign post N45°W 2'
- 1985 On November 14, Terry Freeman and Walt Curo, Cass County Surveyor, pulled I.P. and set in its place a 2" square iron monument with stamped aluminum cap.