

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


CENTER NORTH SIXTEENTH Corner of Section 12, Township 142, Range 31, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 7/2/86 placed a 2" x 36" galvanized iron pipe with 3" marked
DATE
brass cap.

SKETCH OF REFERENCE TIES

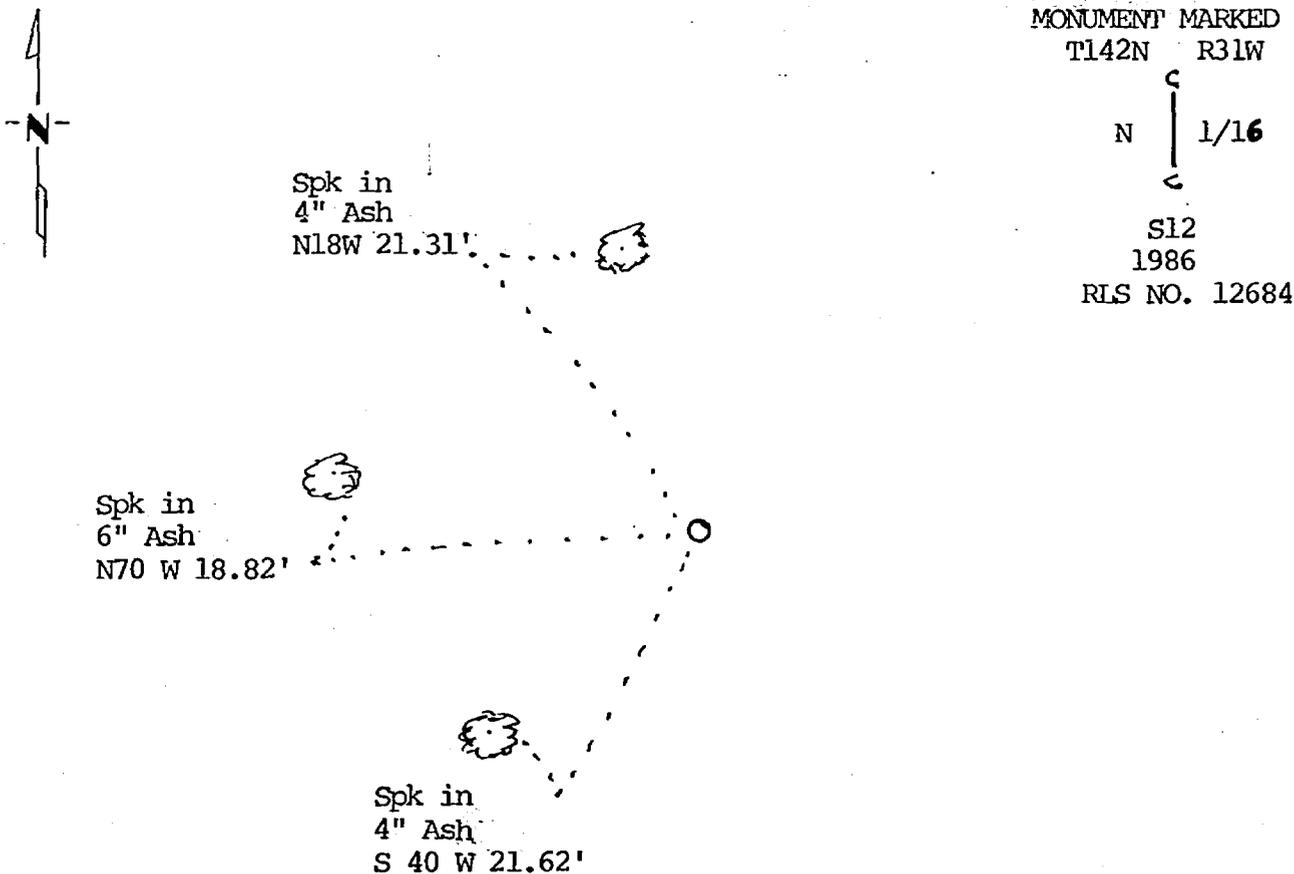

BEARINGS ARE APPROXIMATE

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Sam A. Ataman 7/10/86
SIGNATURE DATE

Registration No. 12684

- Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

290152
 OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 10:10 A.M. on the 16 day of July A.D., 1986

County Recorder Clordine Kaylor
 By MS, Deputy

DOCUMENT NO. 290152

Statement of Evidence:

- 1917 U.S. General Land Office dependent resurvey established this corner and iron pipe with a marked brass cap was set to mark the corner. The following bearing trees were marked: 6" Poplar N 25½ E 77 links and 5" Poplar N 41½ West 38 links.
- 1986 U.S. Forest Service office in Cass Lake was contacted for information and no resurvey information was found on this corner. They had searched for the corner but did not find any evidence.
- 1981 We ran a traverse through the area of this corner and found no marker or evidence of the corner. The approximate area was marked by a 4" Aspen blaxed on 4 sides.
- 1986 After locating the North ¼ corner and Center ¼ corner of Section 12, we determined this position by lost method, midway and on line. We measured 2580.70 feet between the N¼ and C¼. GLO distance was 39.04 chains (2576.64'). At the lost position we set a 2" x 36" U.S. Forest Service monument with a 3" marked brass cap. Three new bearing trees were marked as shown on this certificate. Steel fence posts with U.S. Forest Service signs were set 2.5 feet South and East of the corner monument. From the corner monument set, we found the remains of an Aspen stump N25E 50.5 feet, which fit good with the GLO bearing tree call.