

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


East Quarter _____ Corner of Section 9, Township 142, Range 26, 5th P.M.
Cass

STATE OF MINNESOTA, County of _____

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 5-21-86 placed a 2"x60" galv. iron pipe with brass cap
DATE in a mound of dirt in 24" of water in a Beaver Pond

Not to scale. SKETCH OF REFERENCE TIES

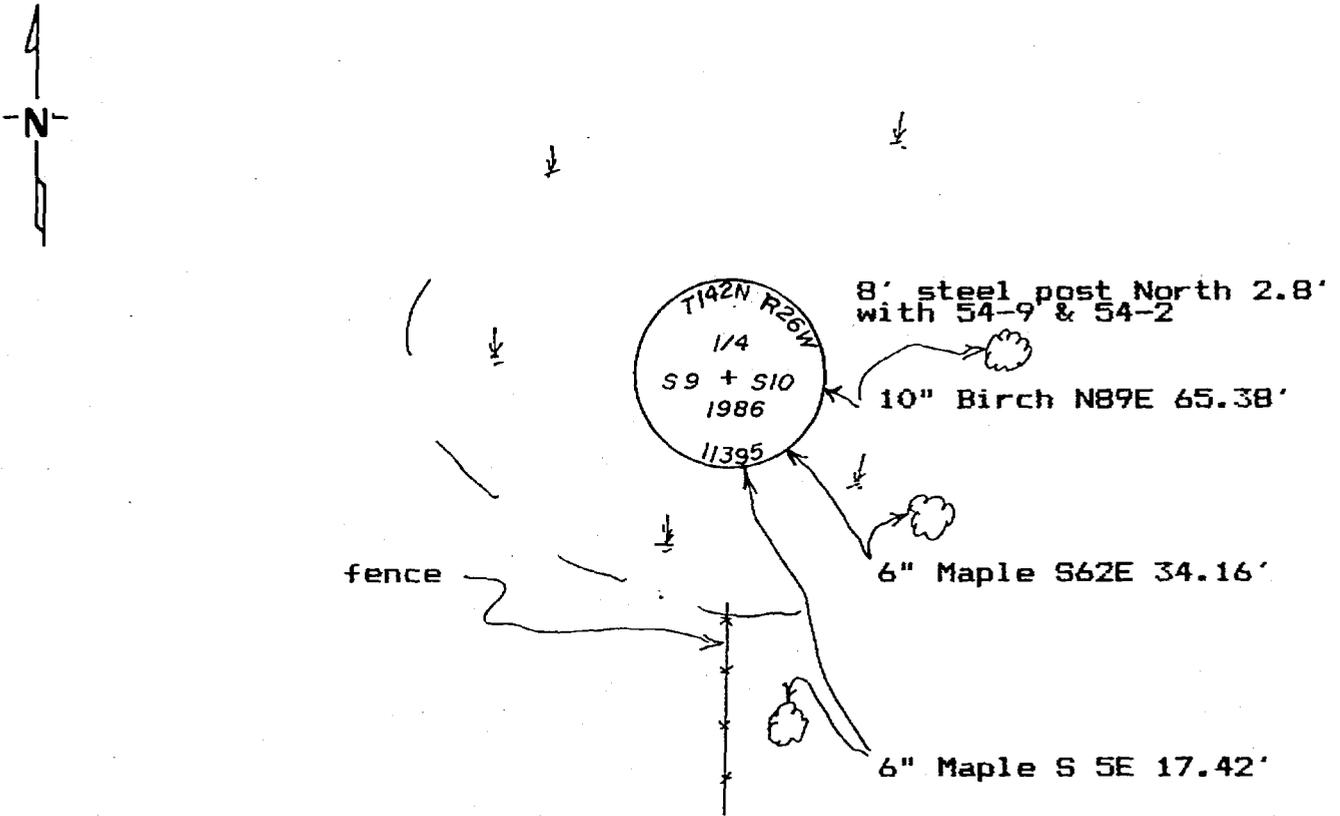

All measurements are to spks. in side of the tree, trees are double blazed and scribed and painted red with USFS 54-3 bearing tree tag.

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Corso 8-12-86
SIGNATURE DATE

Registration No. 11395

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

290927
OFFICE OF THE REGISTER OF DEEDS
County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 4:15 P.M. on the 15 day of August A.D., 19 86

Register of Deeds Clairline Kaylor
By MS Deputy

DOCUMENT NO. 290927

STATEMENT OF EVIDENCE East Quarter Corner of Section 9, Township
142 north, Range 26 West of the 5th Principal Meridian

1872 GLO set a wood post in a swamp to mark this corner and marked the following BT'S.

8" Tamarack	North 89 West	22 Lks (14.52 feet)
4" Maple	South 24 East	25 Lks (16.50 feet)

The original notes call for entering a swamp at 39.5 chs., at 40 chs. set cor. at 44.5 lv. swamp.

1979 USFS paced to this corner and made a search, but found no evidence.

1986 Walter E. Curo ran a traverse to the area and located the shore of the swamp. We found an old fence south of the swamp at the only location where the distance across the swamp comes close to matching the called measurement. The banks of the swamp are fairly steep so changes in water level wouldn't greatly effect the distance across it.