


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 35, Township 142, Range 26, 5th P.M.
 STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On 4-29-86 found a 1/2" iron pipe 2.3' below the surface of
DATE county Road number 4
- left monument as found, lowered monument, removed monument (explain)
- On 4-29-86 placed a 2"x24" galv. iron pipe with brass cap
DATE 1" below surface of blacktop.

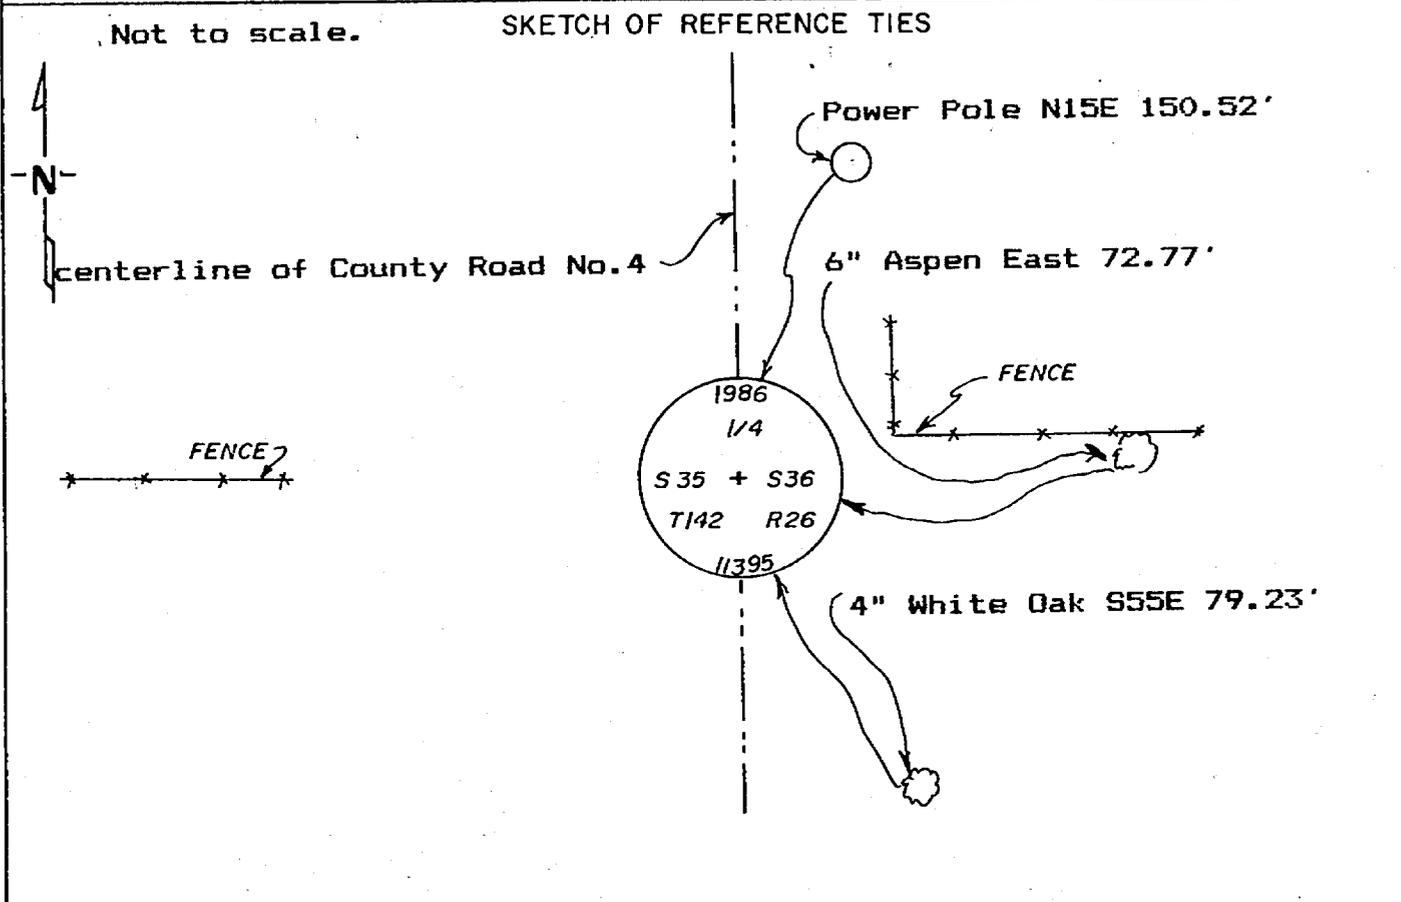

All measurements are to spks. in side of the tree, trees are double blazed and scribed and painted red with USFS 54-3 bearing tree tag.

Statement of evidence relative to this corner location is on back of page. 291474

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Leco 9-2-86
 SIGNATURE DATE

Registration No. 11395

Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS
 County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 3:34 P.M. on the 5 day of Sept A.D., 19 86

Register of Deeds Chloé K. Kay
 By ms, Deputy

DOCUMENT NO. 291474

STATEMENT OF EVIDENCE East Quarter Corner Section 35, T. 142 N.,
R. 26 W., 5th P.M.

- 1872 U.S. General Land Office survey set a wood post for this corner and marked the following bearing trees: 6" Aspen S 51 W 6 lks., 6" Aspen S 52 E 75 lks.
- 1912 James Flynn found old Govt. BT's 10" Aspen S 52 E 75 lks. County Book "B" page 514-515.
- 1982 County Highway Department and Terry Freeman, Cass County Surveyors Office, found $\frac{1}{2}$ " rod with 1" x 2" solid oval head down 2.4' with top 6" bent over in line with a fence 500' West & 7' South of fence East in centerline of County road #4: 4" W Oak S 52 E 79.25', 6" Balsom S 80 E 91.34', CFP N 79 E 46.58'.
- 1986 Walter E. Curo found the iron monument 2.4' down and set a 2" x 24" galv. iron pipe with brass cap on top 1" below surface.