


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 9, Township 135 N., Range 32 W., 5th P.M.
STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 9/30/86 placed a cast iron monument in centerline E-W rd, down 8"
DATE

SKETCH OF REFERENCE TIES

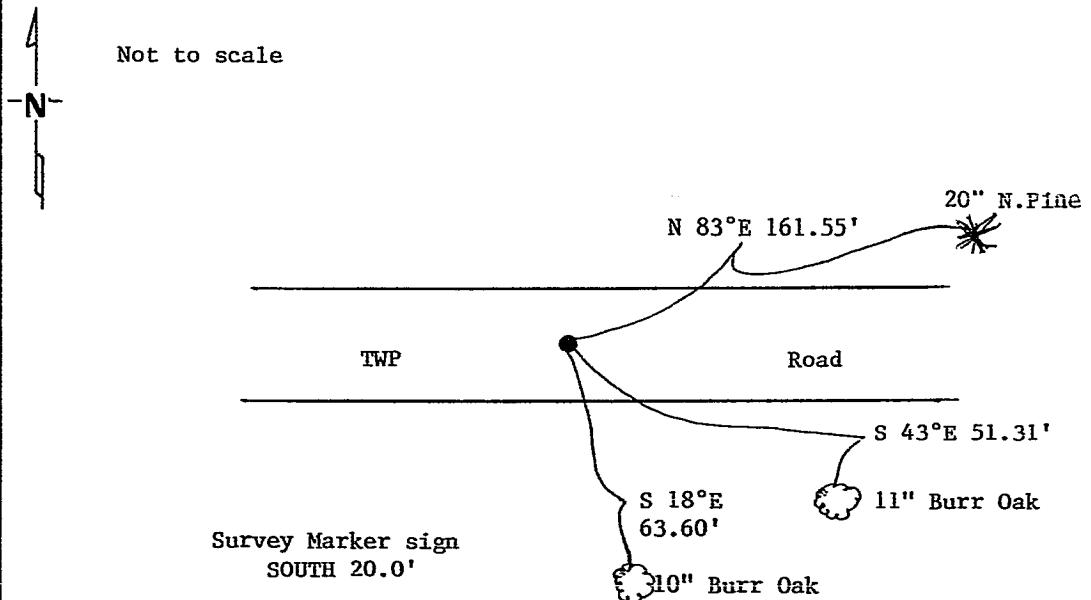

Measurements are to nail in side of tree.
Bearings assumed using 5° declination.

Statement of evidence relative to this corner location is on back of page. 297168

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Olson 1-22-87
SIGNATURE DATE

Registration No. 11395
 Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS
County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 8:45 A.M. on the 1 day of June A.D., 19 87

Register of Deeds Claudia Kayle
By ms, Deputy

DOCUMENT NO. 297168

STATEMENT OF EVIDENCE Northeast Corner Section 9, T.135 N., R.32 W., 5th P.M.

- 1866 U.S. General U.S. General Land Office survey set a wood post for this corner and marked the following bearing trees: 10" Y.Pine S 88 $\frac{1}{2}$ E 133 lks., 12" Y.Pine N 77 E 197 lks.
- 1985 On Sept. 19, Terry Freeman, Cass County Survey Technician and Ken Meyer, backhoe operator dug at location provided by Comstock and Davis using measurements along the N. line of Sections 9 & 10. Dug 11' E-W x 9' N-S x 2.75' deep. 8" sand top, 1' fill and dug 1' into natural sand- found nothing.
- 1986 On Sept. 30, Terry Freeman, Jim Cripps and Norman Maunu set a cast iron monument down 8" in centerline of E-W rd at location provided by Comstock & Davis at proportional distance along the N. line of Sections 9 & 10.