

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


North Quarter Corner of Section 14, Township 135 N., Range 32 W., 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 8/26/85 found a 6" piece of badly bent I.P. down 0.3', also a 1/2 x 12" iron bar under bent pipe, in line with fences N & S
DATE
 left monument as found, lowered monument, removed monument (explain)
- On 8/13/86 placed a cast iron monument down 0.7', placed found iron bar on N. side and found I.P. on S. side of cast iron.
DATE

SKETCH OF REFERENCE TIES

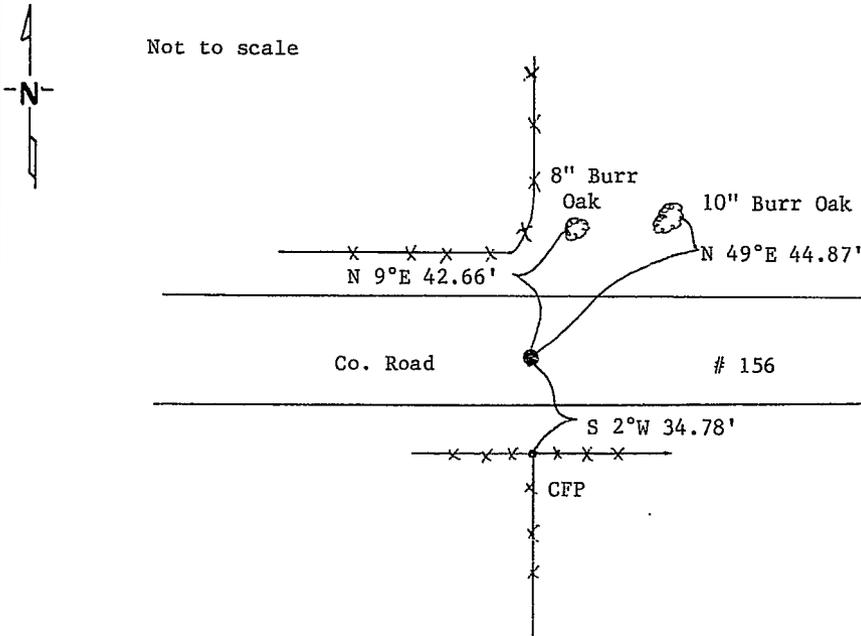

Measurements are to nail in side of object.
 Bearings are assumed using 5° declination.

Statement of evidence relative to this corner location is on back of page. 297496

I hereby certify that this document, and the data contained herein was prepared by me or under my direct supervision.

Walter E. Brown 1-22-87
SIGNATURE DATE

Registration No. 11395

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of Law

I hereby certify that this document was filed in the Reg. of Deeds office at 9:05 A. ..M. on the 12 day of June A.D., 19 87

Register of Deeds Clondine Keyser

By MS, Deputy

DOCUMENT NO. 297496

STATEMENT OF EVIDENCE North Quarter Corner Section 14, T.135 N., R.32 W., 5th P.M.

- 1866 U.S. General Land Office survey set a wood post for this corner and marked the following bearing trees: 14" Aspen S 25°E 5 lks., 14" Aspen N 5½°W 50 lks.
- 1916 County Survey Record Book "B", page 51, shows a survey by E.B. Horst. He set a 1½ x 48" I.M.
- 1985 On August 26, Terry Freeman, Cass County Survey Technician, found a badly bent 1½" iron pipe 6" long, down 0.3' in line with fence S.
- 1986 On August 13, Terry Freeman and Wade Moser pulled found I.P. and found ½" x 12" iron bar. Replaced with a cast iron monument, down 0.7'. Set 6" piece of I.P. on S. side of monument and iron bar on N. side of monument.