

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter _____ Corner of Section 21, Township 135 N., Range 32 W., 5th P.M.



STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 8/13/86 placed a cast iron monument down 0.8' in centerline of N-S rd.
DATE

SKETCH OF REFERENCE TIES

Not to scale

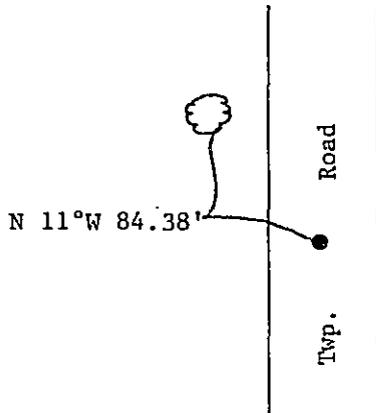

No other trees close

Measurement to nail in side of tree.
Bearing assumed using 5° declination.

Statement of evidence relative to this corner location is on back of page. 297499

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Carr 1-22-87
SIGNATURE DATE

Registration No. 11395

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 9:20 A. A.M. on the 12 day of June A.D., 1987

Register of Deeds Clouline Kaye

By MS, Deputy

DOCUMENT NO. 297499

STATEMENT OF EVIDENCE East Quarter Corner Section 21, T.135 N., R.32 W., 5th P.M.

- 1866 U.S. General Land Office survey set a wood post for this corner and marked the following bearing trees: 5" Tam. N $\frac{1}{2}$ °E 236 lks., 6" Tam. N $\frac{1}{2}$ °W 216 lks.
- 1915 County Survey Record Book "C", page 572, shows a survey by Roy Bryant. He set the corner.
- 1985 On August 30, Terry Freeman, Cass County Survey Technician and Dan Marcum, County Forester searched area of corner with metal locator, but found nothing.
- 1985 On Sept. 17, Terry Freeman and Ken Meyer, backhoe operator dug 10' N-S x 8' E-W x 2.5' deep. 1' sand top, 1.5' fill and hit layer of cordoroy. Found nothing.
- 1986 On August 13, Terry Freeman and Wade Moser, set a cast iron monument in place of nail provided by Comstock & Davis in center-line of N-S road.