

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 24, Township 141 N, Range 28 W, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:


On 10-30-87 found a BRASS CAPPED MONUMENT
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

MAG. DECL: 4 1/2° E

SKETCH OF REFERENCE TIES

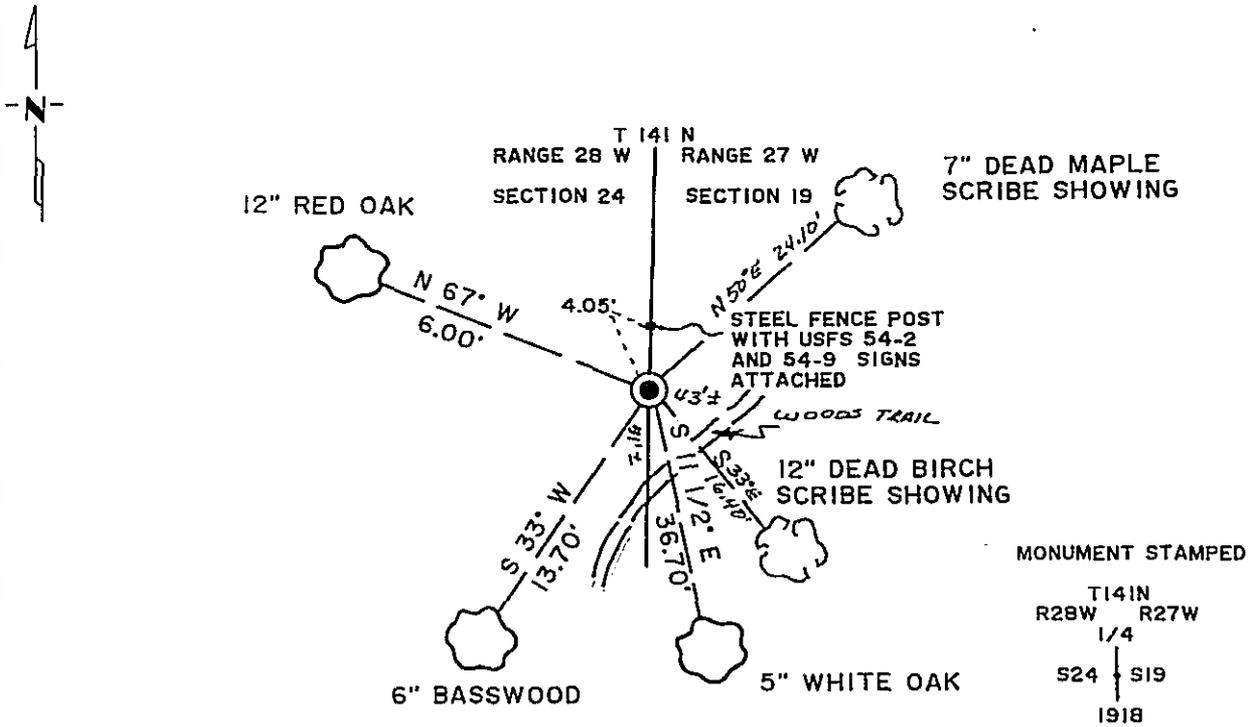

TIES SHOWN ARE TO 16d NAIL IN BASE OF TREE

Statement of evidence relative to this corner location is on back of page.

302190

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

Roger A. M. Anderson
Date 1/07/88 Registration No. 11946

OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorder's office at 2:50 P M. on the 8 day of January A.D., 19 88

County Recorder Claudine Kayser
By M. S., Deputy
DOCUMENT NO. 302190

Statement of Evidence: East Quarter Corner of Section 24, Township 141
North, Range 28 West of the 5th Principal Meridian

- 1873 P. H. Conger, contract Surveyor for the General Land Office, set a post for a quarter section corner, from which
Ironwood 4 ins dia bears S 45°W 13 lks dist
Sugar Maple 12 ins dia bears N 45°E 11 lks dist.
- 1918 Earl G. Harrington, U.S. Cadastral Engineer, notes show:
The point for the original ¼ sec cor., which is now marked by a galvanized iron pipe, 2 ins. diam., in addition to which, I set an iron post, 3 ft. long, 1 in diam., 26 ins. in the ground, with brass cap mkd....
From which the remains of the original bearing trees
A maple stump, 18 ins. diam., bears N.44°E., 11 lks dist.;
(reported N.45°E.) mkd B.T.
Take new bearing trees
A maple, 14 ins. diam., bears N.75°E., 24 lks dist.
An elm, 8 ins. diam., bears S.49 3/4°W., 157 lks. dist
mkd. ¼ S 24 B T.
- 1952 Harold Curo, County Surveyor, used the found government quarter corner in his subdivision of part of the northeast quarter of Section 24 and prepared a plat recorded as BREEZE-WAY. (See Co. Survey Book "D", found 2 1/2" I.P. & GLO Brass Cap)
- 1972-73 James Ekstrom, Forest Service Technician, ..Found corner in good condition along with 2" Co. Pipe. To perpetuate this corner I scribed three new bearing tree's.
Oak 9" N64°W 6.3' scribed ¼ S24 BT (See Certificate of Location
Maple 8" N50°E 24.1' scribed ¼ S19 BT of Government Corner #922,
Birch 10" S33°E 16.4' scribed ¼S19 BT 1973, by Wm Okerman, shows
same ties)
- 1987 Roger A. Mustonen, RLS 11946, under contract with USFS, found the G.L.O. monument along with the 2" pipe and Ekstrom's 3 BTs. The maple and Birch are now dead. Blazed and scribed 2 new trees and made new ties to a nail in the base of the trees, and accepts the G.L.O. monument as a perpetuation of the East Quarter Corner of Section 24.
- 1913 John Curo, County Surveyor, set a 3"X3"X36" Ironwood stake, (See County Survey Record Book "A, Pages 564-567)
- 1915 N.D. Gorman, found corner, (see County Survey Record Book "B" Page 571)