

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 35, Township 146, Range 27, 5th P.M.

STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch:

On 3-16-88 found a 6" diameter concrete monument with a 3" marked
DATE
brass cap.

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

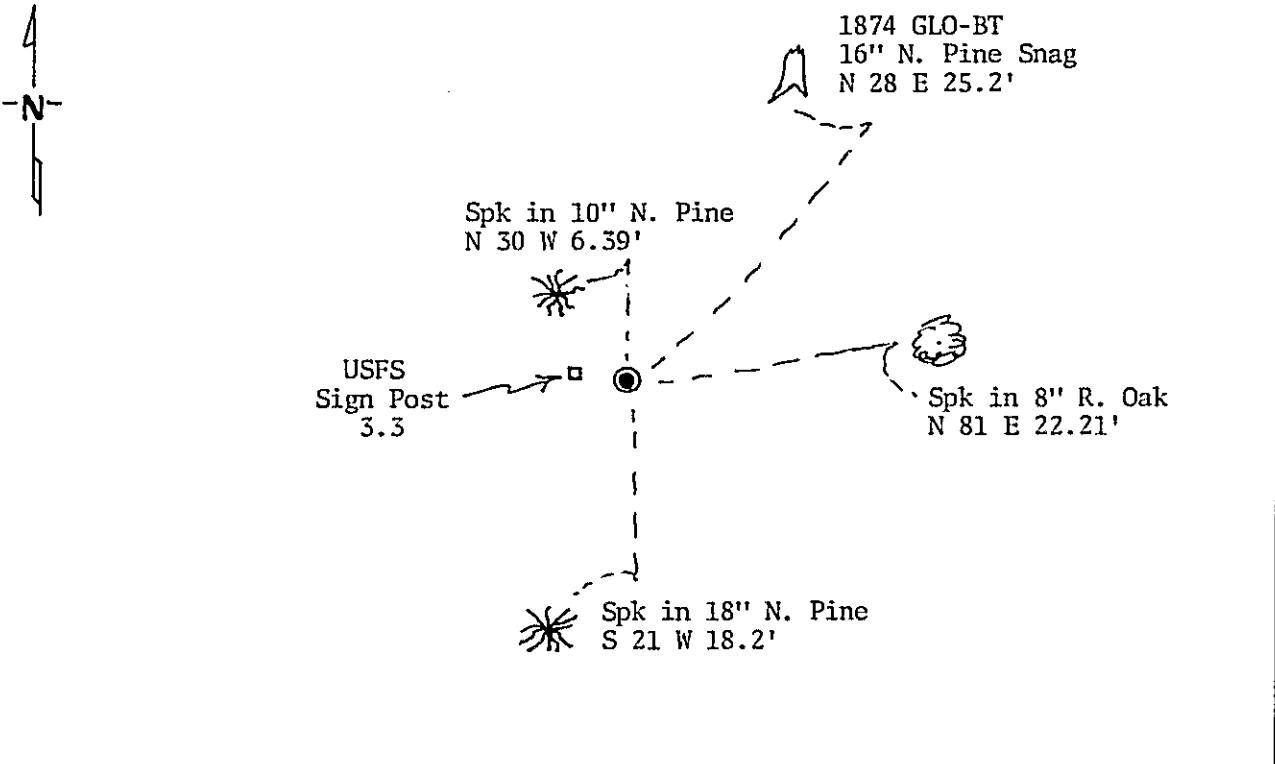

BEARINGS ARE APPROXIMATE

Statement of evidence relative to this corner location is on back of page. 303658

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ray A. Ataman 3/29/88
SIGNATURE DATE

Registration No. 12684

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS
County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 4:10 P.M. on the 12 day of April A.D., 1988

Register of Deeds Claudine Kayler
By ms, Deputy

DOCUMENT NO. 303658

Statement of Evidence:

- 1874 U.S. General Land Office survey set wood post for this corner and marked the following bearing trees: 12" N. Pine N 28 W 38 links and 8" N. Pine S 14 E 48 links.
- 1937 U.S. Forest Service records show the following: J.A. Gjelhaug conducted survey of homesites in the SE $\frac{1}{4}$ of Sec. 26. Corner sheet shows he found the corner marked by an oak post with the original northwest bearing ~~tree~~ found as: 16" N. Pine N 28 E 38 links with scribing marks. A metal location poster was placed on a 5" J. Pine N 10 E 12 links.
- 1962 U.S. Forest Service records show the following: R.H. McDonald found corner marked a fallen squared oak post and a 6" diameter 5' long cylindrical concrete monument capped with a 3" diameter stamped bronze tablet was set for the corner. Original bearing ~~tree~~ was found as: 16" dead N. Pine, with scribing plainly visible, N 28 E 25.08'. New bearing trees marked: 11" Red Pine S 21 $\frac{1}{2}$ W 18.2' and 7" J. Pine N 4 W 19.4'. Both trees were scribed. A steel sign post was set N 76 $\frac{1}{2}$ W 3.25'. A Certificate of Location was filed on Dec. 10, 1962 by Peter Meyer, RLS No. 3628 with the Cass County Register of Deeds showing this same information.
- 1988 Found concrete monument with brass cap and sign post as described in 1962 certificate. Found bearing trees as follows: Original BT 16" N. Pine snag with scribing plainly visible facing southwest (original BT bearing was listed as N 28 W) N 28 E 25.2' to center, 1962 BT as 18" N. Pine with metal tag and scar S 21 W 18.2', 1962 BT as J. Pine stump with scribing N 4 W 19.4' to center, and 1937 poster tag on ground near J. Pine stump N 19 E 8.5' to center. Two new ties were taken as shown on this certificate.