

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 35, Township 141 N, Range 30 W, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch: Latitude: 46° 59' 39.22213"  
 Longitude: 94° 26' 20.56193"



On 6/23/88 found a 2" monument with brass cap  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES  
 Not to Scale

All distances are horizontal to nail in side of tree.

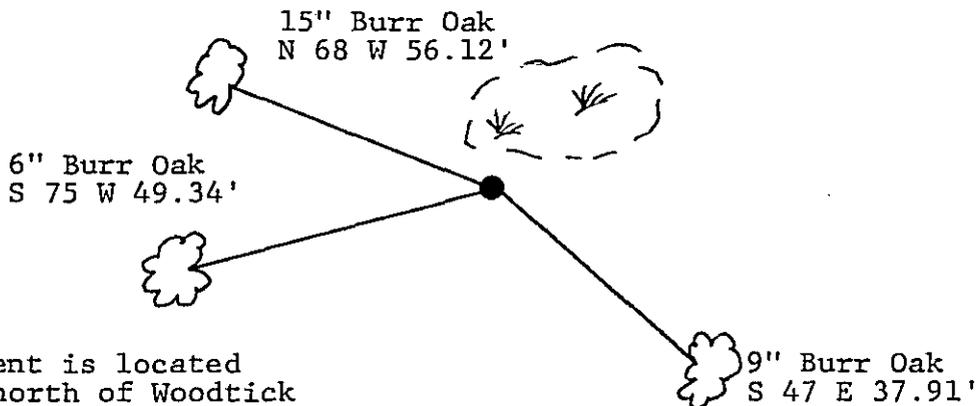

Monument is located 750' north of Woodtick Trail and 40' south of small swamp. Line to standard East and West. 8' sign post east 3.1'

Monument Stamped

T 141 N R 30 W

S 26  
 S 35  
 1983

All trees are painted with red enamel and marked with a 54-3 (Bearing Tree) tag.

R.L.S. No. 12684

Statement of evidence relative to this corner location is on back of page. 309849

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker

David S. Landecker  
 Date 12-15-88 Registration No. 17008

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 11:05 A. on the 12 day of January A.D., 1989

County Recorder Claudia Kayle

By M.S., Deputy

DOCUMENT NO. 309849

Statement of Evidence:

North Quarter Corner Section 35, Township 141  
North, Range 30 West, Cass County, Minnesota

V-19 141-30  
Bk.5 Pg.24

1873 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 30 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 5 inch Red Oak South 31 degrees West a distance of 27 links; and a 7 inch Spruce North 22 and 1/2 degrees East a distance of 46 links.

1964 U.S. Forest Service technician Ekstrom found nothing at location of the corner.

1983 Gary Stevenson, under U.S. Forest Service Contract, set a 2 inch by 36 inch iron pipe with a bronze tablet at lost single proportion position. 8 foot sign post East a distance of 3.2 feet; a 20 inch White Oak North 16 degrees West a distance of 15.65 feet; a 7 inch White Oak South 58 degrees East a distance of 37.94 feet; and a 5 inch White Oak South 28 degrees West a distance of 11.90 feet. He filed the corner certificate, Document Number 279152.

1986 U.S. Forest Service crews set an aerial target over this corner position for determination of coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 on June 23 a Landecker-Stevenson & Associates crew visited the corner and found the following evidence: brass cap monument up 1.1 foot in good condition; 8 foot sign post East 3.1 feet with signs 54-2 and 54-9; 1983 bearing trees: Northwest is 2 foot stump, Southwest is 5 foot stub; 1983 bearing tree is now 9 inch Burr Oak South 47 degrees East a distance of 37.91 feet. New ties: a 6 inch Burr Oak South 75 degrees West a distance of 49.34 feet; and a 15 inch Burr Oak North 68 degrees West a distance of 56.12 feet.