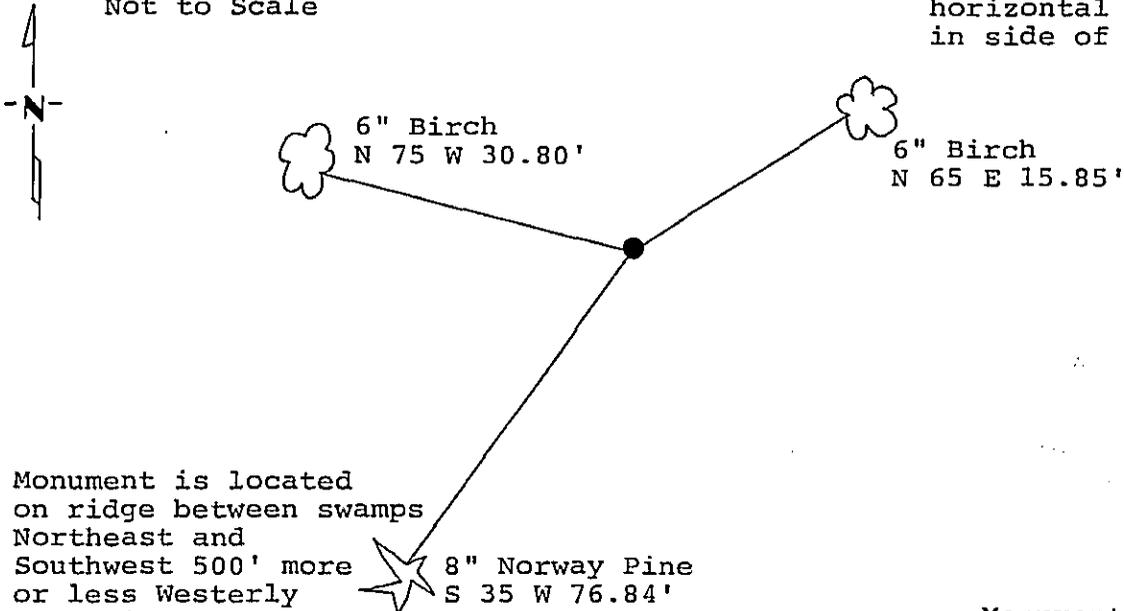


CERTIFICATE OF LOCATION OF GOVERNMENT CORNERNorth Quarter Corner of Section 27, Township 141 N, Range 30 W, 5th P.M.STATE OF MINNESOTA, County of CassAt the corner location shown on the sketch: Latitude: 47° 00' 30.564"
Longitude: 94° 27' 37.100"

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 2/21/89 placed a 2 inch by 48 inch iron pipe with brass cap,
DATE
plastic base and magnet.

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES
Not to ScaleAll distances are
horizontal to nail
in side of tree

Monument is located
on ridge between swamps
Northeast and
Southwest 500' more
or less Westerly
of trail.

8" Norway Pine
S 35 W 76.84'

8' steel sign post
North 5.0'

Monument Stamped
T 141 N R 30 W
S22
S27
1989
RLS 17008

All trees are painted with red enamel and marked
with a 54-3 (bearing tree) tag.

Statement of evidence relative to this corner location is on back of page.

310864

I hereby certify that this survey, plan or
report was prepared by me or under my
direct supervision and that I am a duly
Registered Land Surveyor under the laws
of the State of Minnesota.

David S. Landecker
David S. Landecker

Date 3/10/89 Registration No. 17008

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in
the Co. Recorders office at 1:45 P.M. on the
14 day of March A.D., 1989

County Recorder Clouaine KaylerBy MS, DeputyDOCUMENT NO. 310864

Statement of Evidence:

North Quarter Corner Section 27, Township 141
North, Range 30 West, Cass County, Minnesota

R-15 141-30
Bk.5 Pg.46

1873 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 30 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 9 inch Birch South 27 degrees East a distance of 19 links; and a 7 inch Poplar North 38 degrees West a distance of 21 links.

1964 U.S. Forest Service technician Ekstrom found old North-South fence, no evidence of Bearing Trees.

1986 U.S. Forest Service crews set an aerial target in the vicinity of this corner for the search and establishment of the true corner position. The target having coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 on September 22 a Landecker-Stevenson & Associates crew searched for the corner. The following information was found and noted: no evidence of bearing trees or fence. Position is on top of ridge in Aspen and Birch.

1989 on February 21 a Landecker-Stevenson & Associates crew set corner, lost on a line run from the Southwest corner of Section 22, computed on a mean bearing between the North line of Section 22 and the South line of Section 27, using the original General Land Office distance as measured in 1873 from the Northwest corner of Section 27. A 2 inch by 48 inch iron pipe with brass cap, plastic base and magnet was set. New bearing trees were marked as shown and steel sign post is in place as noted on front of this certificate.