

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 32, Township 141 N, Range 30 W, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch: Latitude: 46° 59' 38.802"
 Longitude: 94° 29' 30.358"


On 6/23/88 found a 2" iron monument with brass cap
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES

All distances are horizontal to nail in side of tree.

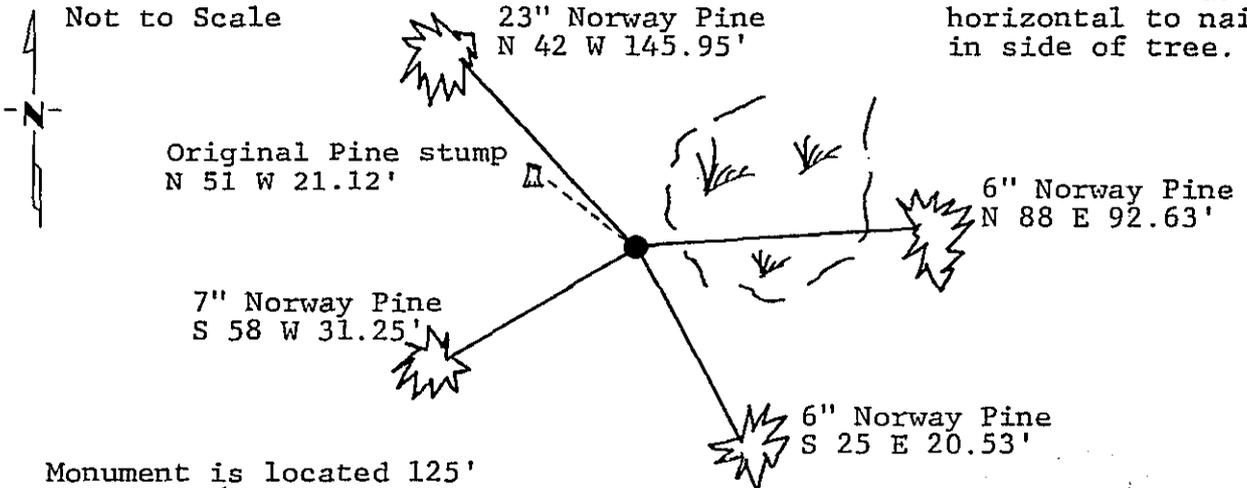

Monument is located 125' more or less south of North Country Trail and 10' southwest of small swamp. Area is ringed by southerly and easterly Norway Pine Plantation. Sign post north 5.0'

Monument Stamped
 T 141 N R 30 W
S29 | S28
S32 | S33
 1964

All trees are painted with red enamel and marked with a 54-3 (bearing tree) tag.

RLS No 6807

Statement of evidence relative to this corner location is on back of page. 310874

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker
 David S. Landecker

Date 3/30/89 Registration No. 17008

OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 2:50 P. M. on the 14 day of March, A.D., 1989

County Recorder Cherlene Kayler

By MS, Deputy

DOCUMENT NO. 310874

Statement of Evidence:

Northeast Corner Section 32, Township 141 North,
Range 30 West, Cass County, Minnesota

V-9 141-30
Bk.5 Pg.23

1973 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 30 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 13 inch Yellow Pine South 33 degrees West a distance of 29 links; a 16 inch Yellow Pine North 51 degrees West a distance of 32 links; a 10 inch Oak South 30 degrees East a distance of 54 links; and a 14 inch Poplar North 31 degrees East a distance of 99 links.

1964 U.S. Forest Service found decayed pine stump Southwest and stump Northwest with scribe visible. Set a 2 inch by 5 foot iron pipe with bronze tablet. New bearing trees: a 5 inch Oak North 76 degrees East a distance of 6.0 feet; and a 18 inch Norway Pine South 50 degrees East a distance of 117.5 feet.

1969 U.S. Forest Service Surveyor Bill Okerman filed corner certificate using 1964 information.

1986 U.S. Forest Service crews set an aerial target over this corner position for determination of coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 on June 23 a Landecker-Stevenson & Associates crew visited the corner and found the following evidence: the 2 inch iron pipe with brass cap set in 1964 by USFS, being 125 feet, more or less, South of North Country Trail and 10 feet Southwest of small swamp, original Northwest bearing tree stump with "B T" faintly visible North 51 degrees West a distance of 21.12 feet; 1964 bearing tree: a 23 inch Norway Pine North 42 degrees West a distance of 145.95 feet. Pine plantation all around corner. New bearing trees were marked as shown and an 8 foot steel sign post set as noted on front of this certificate.