

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Closing Corner on
Reservation line Corner of Section 17, Township 141 N, Range 30 W, 5th P.M.

STATE OF MINNESOTA, County of Cass


At the corner location shown on the sketch: Latitude: 47° 01' 44.974"
 Longitude: 94° 30' 09.960"

On 11/15/88 found a 1 inch iron pipe with brass cap.
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES All distances are
 Not to Scale horizontal to nail in
 side of tree.

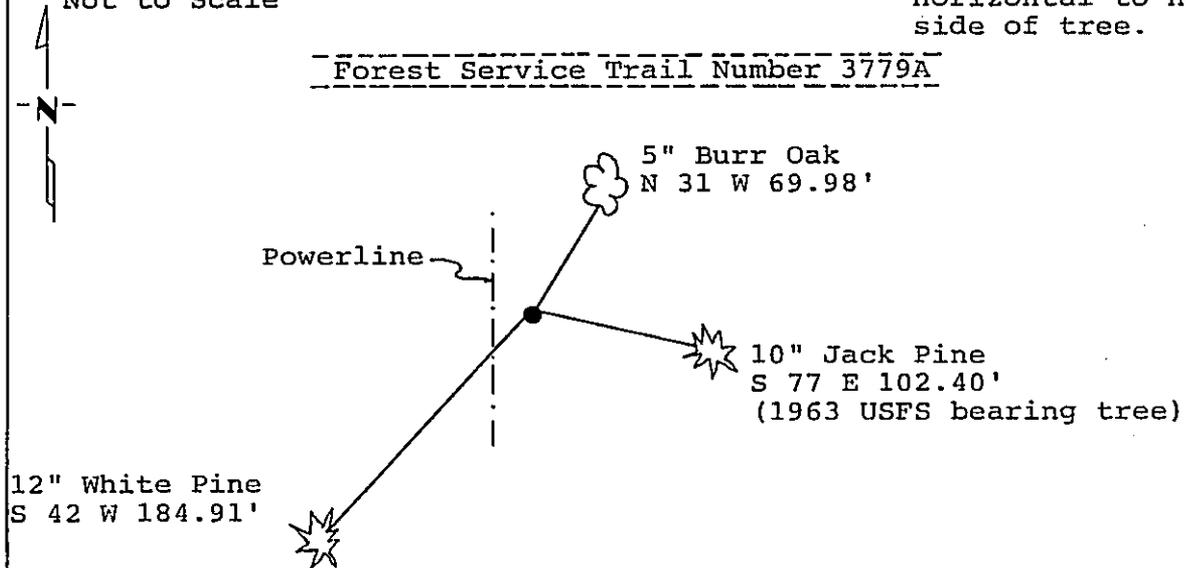

Monument is located 60' easterly of powerline (N-S) and 180' southerly of Forest Service Trail Number 3779A.
 6' Steel sign post South 5.8'
 8' Steel sign post North 4.0'

All trees are painted with red enamel and marked with a 54-3 (Bearing Tree) tag.

Monument Stamped
 CC
 C
S17 | S17
 C
 1917

Statement of evidence relative to this corner location is on back of page. 311054

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker
 David S. Landecker

Date 3/24/89 Registration No. 17008

OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 11:05 A. .M. on the 27 day of March, A.D., 19 89

County Recorder Clouidine Koyler
 By ms, Deputy

DOCUMENT NO. 311054

Statement of Evidence:

Closing Corner on South Boundary of Indian
Reservation and North-South Quarter Line of
Section 17, Township 141 North, Range 30 West,
Cass County, Minnesota

LM-7 141-30
Bk.9 Pg.15

1917 U.S. General Land Office dependent resurvey established this corner and an iron pipe with a marked brass cap was set. The following bearing tree was marked: a 10 inch Jack Pine South 74 degrees East a distance of 215 links.

1963 U.S. Forest Service records show the following: found a 1 inch iron pipe with a marked brass cap. The following bearing trees were marked: a 4 inch Oak South 11 degrees East a distance of 28.5 feet; and a 9 inch Jack Pine South 77 degrees East a distance of 102.4 feet. Set a 6 foot steel sign post South 75 degrees East a distance of 3.8 feet.

1986 U.S. Forest Service crews set an aerial target over this corner position for determination of coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 on November 15 a Landecker-Stevenson & Associates crew visited the corner and found the following evidence: a 1 inch iron pipe with marked brass cap, 1917 Jack Pine and 1963 Oak are gone, 1963 Jack Pine now a 10 inch Jack Pine, and the 1963 six foot steel sign post. New bearing trees were marked and steel sign post set as shown on front of this certificate.