

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 23, Township 141 N, Range 30 W, 5th P.M.

STATE OF MINNESOTA, County of Cass


At the corner location shown on the sketch: Latitude: 47° 01' 24.744"  
 Longitude: 94° 25' 42.426"

On 1/11/89 found a 2 inch iron pipe with brass cap.  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On            placed a             
DATE

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES All distances are horizontal to nail in side of tree.  
 Not to Scale

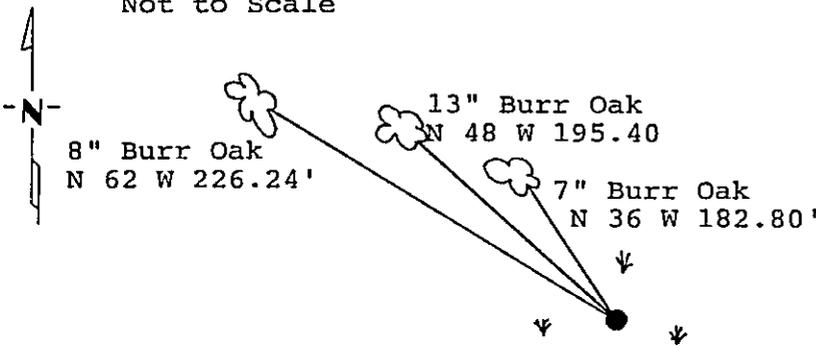

Monument is located in bog, 500' easterly of Shell Lake.  
 (2) 8' steel sign posts North 2.0'  
 (2) 8' steel sign posts West 2.0'

Monument Stamped  
 T 141 N R 30 W  
 S14 | S13  
 S23 | S24  
 1917

All trees are painted with red enamel and marked with a 54-3 (Bearing Tree) tag.

Statement of evidence relative to this corner location is on back of page. 311055

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker  
 David S. Landecker  
 Date 3/24/89 Registration No. 17008

OFFICE OF THE COUNTY RECORDER  
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 11:10 A.M. on the 27 day of March A.D., 19 89  
 County Recorder Claudine Kayler  
 By ms, Deputy  
 DOCUMENT NO. 34055

Statement of Evidence:

Northeast Corner Section 23, Township 141  
North, Range 30 West, Cass County, Minnesota

N-21 141-30  
Bk.5 Pg.33

1873 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 30 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 4 inch Tamarack North 43 degrees West a distance of 26 links; a 4 inch Tamarack South 7 and 1/2 degrees West a distance of 99 links; a 4 inch Tamarack South 21 degrees East a distance of 176 links; and a 4 inch Tamarack North 59 degrees East a distance of 29 links.

1917 U.S. General Land Office dependant resurvey found the corner marked by the original wood post and original Northeast, Southwest and Northwest bearing trees. A 2 inch by 36 inch iron pipe with a marked brass cap was set to mark the corner. The following bearing trees were marked: a 7 inch Tamarack South 74 and 1/2 degrees West a distance of 287 links; and a 10 inch Poplar North 65 and 1/2 degrees West a distance of 167 links.

1982 U.S. Forest Service records show the following: Curt Krause, technician, found a 2 inch iron pipe and cap in place in Tamarack bog, no evidence of bearing trees.

1986 U.S. Forest Service crews set an aerial target over the 2 inch iron pipe previously found for determination of coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1989 on January 11 a Landecker-Stevenson & Associates crew visited the corner and found the following: 1917 U.S. General Land Office 2 inch iron pipe with brass cap flush with ice in bog, 2 sign posts on East and West sides of monument, no evidence of original or 1917 bearing trees. New bearing trees were marked and steel sign posts set as shown on front of this certificate.