

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 25, Township 141 N, Range 29 W, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch: Latitude: 47° 00' 05.484"
 Longitude: 94° 17' 03.644"


On 6/6/88 found a 1 inch monument with brass cap (General Land Office)

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES
 Not to Scale

All distances are horizontal to nail in side of tree

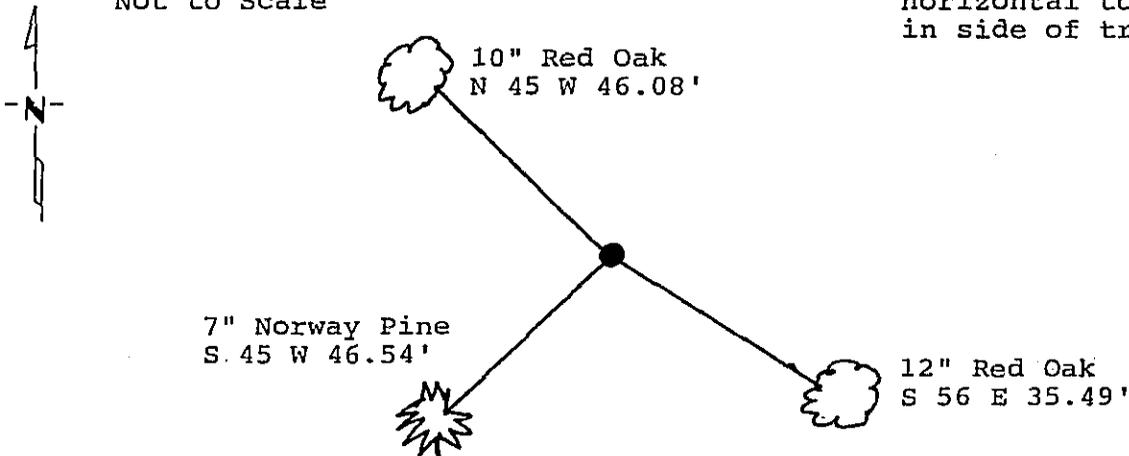

Monument is located 31' more or less east of centerline of 2 trails and 250' more or less of south shore of Little Silver Lake Sign post north 5.0'

Monument Stamped

1/4
 S 25 | S 30
 1918

All trees are painted with red enamel and marked with a 54-3 (Bearing Tree) tag.

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker
 David S. Landecker

Date 3/31/89 Registration No. 17008

31171
 OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 12:05 P.M. on the 3rd day of April A.D., 1989

County Recorder Claudine Kaylor
 By RJK, Deputy

DOCUMENT NO. 31171

Statement of Evidence:

East Quarter Corner Section 25, Township 141
North, Range 29 West, Cass County, Minnesota

T-25 141-29
Bk.4 Pg.12

1873 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while running the East township line of Township 141 North, Range 29 West. The notes indicate a wood post was set to mark the corner position and the following witness: a 16 inch Norway Pine North 70 degrees West a distance of 19 links.

1915 County Surveyor's Record Book B pages 169-177 show survey by John Curo. He set a 2 and 1/2 by 48 inch iron pipe with cap and marked a 4 inch White Birch North 68 degrees West a distance of 20.20 feet.

1918 U.S. General Land Office dependant resurvey found the corner marked by 2 inch iron pipe. An iron pipe with a marked brass cap was set to mark the corner. The following bearing trees were marked: a 14 inch White Oak South 73 and 3/4 degrees East a distance of 209 links; and a 4 inch Red Oak North 15 and 1/4 degrees West a distance of 41 links.

1965 U.S. Forest Service records show the following: found brass cap monument and capped County iron in good condition. New bearing trees were marked: a 5 inch Oak North 17 degrees West a distance of 28.3 feet; and a 5 inch Elm North 69 degrees East a distance of 22.1 feet. Set a 6 foot steel sign post North 5 degrees West a distance of 6.7 feet.

1968 U.S. Forest Service Surveyor Bill Okerman, Licensed Land Surveyor Number 6807, filed corner certificate on June 28, with the Cass County Recorder as certificate Number 497, using 1965 information.

1968 County Highway Department information shows: found General Land Office corner.

1986 U.S. Forest Service crews set an aerial target over this corner position for determination of coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 on May 6 a Landecker-Stevenson & Associates crew visited the corner and found the following evidence: 1 inch General Land Office iron and 2 inch capped County iron.

1988 on July 18 a Landecker-Stevenson & Associates crews tied out the General Land Office iron for the corner, New bearing trees were marked as shown and a steel sign post set as noted on front of this certificate.