

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 34, Township 141 N, Range 29 W, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch: Latitude: 46° 59' 41.628"
 Longitude: 94° 20' 18.271"



On _____ found a _____
DATE

left monument as found, lowered monument, removed monument (explain)

On 3/15/89 placed a 2" by 48" iron pipe with brass cap and
DATE
plastic base with magnet.

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES
 Not to Scale

All distances are horizontal to nail in side of tree.

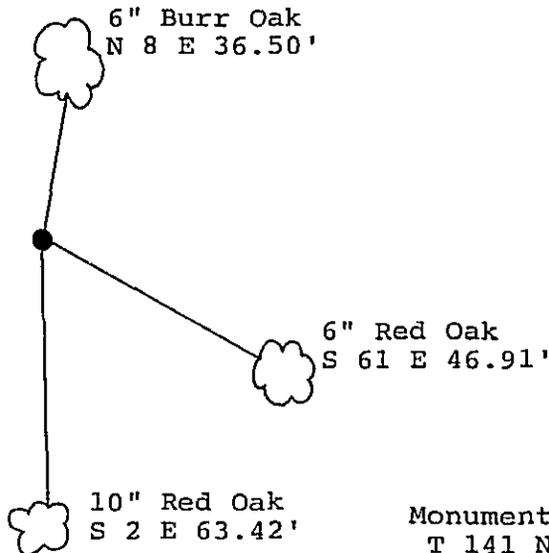

Monument is located 45' Southeasterly of swamp. 8' steel sign post North 5.0'

Monument Stamped
 T 141 N R 29 W

$\frac{1}{4}$ $\frac{S27}{S34}$
 1989

All trees are painted with red enamel and marked with a 54-3 (bearing tree) tag.

RLS 17008

Statement of evidence relative to this corner location is on back of page.

311851

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker
 David S. Landecker

Date 4-28-89 Registration No. 17008

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 3:59 P.M. on the 3 day of May A.D., 1989

County Recorder Clodine Kaye

By ms, Deputy

DOCUMENT NO. 311851

Statement of Evidence:

North Quarter Corner Section 34, Township 141
North, Range 29 West, Cass County, Minnesota

V-15 141-29
Bk.4 Pg.73

1873 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 29 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 20 inch White Pine North 85 degrees East a distance of 21 links; and a 22 inch White Pine South 84 degrees East a distance of 23 links.

1918 U.S. General Land Office dependant resurvey found the corner marked by wood post and both Government bearing trees. A 3 inch by 36 inch wood post 16 inches in ground was set to mark the corner.

1986 U.S. Forest Service crews set an aerial target in the vicinity of this corner for the search and establishment of the true corner position. The target having coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1986 U.S. Forest Service records show the following: technicians chain into area of corner and find Pine stumps that may be the original bearing tree stumps.

1988 on July 8 a Landecker-Stevenson & Associates crew searched for the corner. The following information was found and noted: many Pine stumps in area, none are blazed, scribed or fit original notes. Pine stumps noted by Forest Service personnel do not fit computed ties and are determined not to be original, this corner was determined lost.

1989 on March 15 a Landecker-Stevenson & Associates crew set a 2 inch by 48 inch iron pipe with brass cap and plastic base with magnet. This position was established in its obliterated location determined from the reconstruction of the 1918 GLO resurvey plat and notes. New bearing trees were marked as shown and a steel sign post is in place as noted on front of this certificate.