

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Number 6 Meander Corner of Section 34, Township 141 N, Range 29 W, 5th P.M.

STATE OF MINNESOTA, County of Cass

Latitude: 46° 58' 46.280"
 Longitude: 94° 20' 11.181"

At the corner location shown on the sketch:


On 11/8/88 found a 2 inch pinched top iron pipe
DATE

left monument as found, lowered monument, removed monument (explain)

On 3/17/89 placed a 2 inch by 48 inch iron pipe with brass cap
DATE
and plastic base with magnet.

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES
 Not to Scale

All distances are horizontal to nail in side of tree.

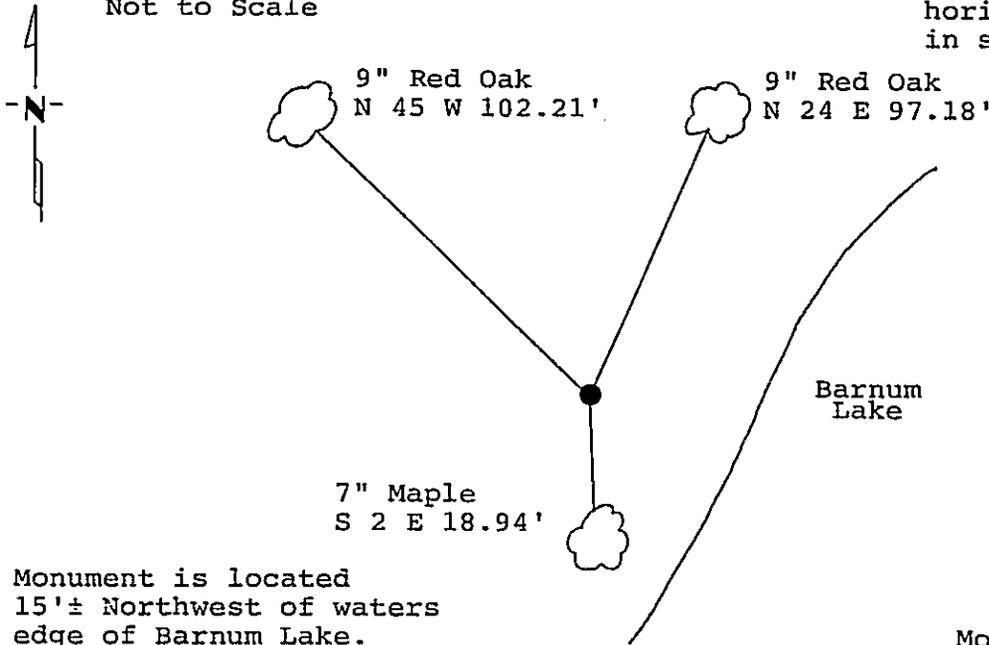

Monument is located
 15'± Northwest of waters
 edge of Barnum Lake.
 8' steel sign post West 4.0'

Monument Stamped
 R29W
 T141N S34 / MC
 T140N S3
 1989
 RLS 17008

All trees are painted with red enamel and marked with a 54-3 (bearing tree) tag.

Statement of evidence relative to this corner location is on back of page. 311952

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker
 David S. Landecker

Date 5-1-89 Registration No. 17008

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 10:20 A. A.M. on the 9 day of May A.D., 1989

County Recorder Claudine Kayler

By MS, Deputy

DOCUMENT NO. 311952

Statement of Evidence:

Meander Corner Number 6 Section 34, Township 141
North, Range 29 West, Cass County, Minnesota

Z14-15 141-29
Bk.6 Pg.37

1863 Johnson and Thornton, U.S. Deputy Surveyors, originally established this corner position while running the 10th Standard Parallel. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 5 inch Oak North 38 degrees West a distance of 42 links; and a 12 inch Birch South 46 degrees West a distance of 20 links.

1965 U.S. Forest Service records show the following: technician Ekstrom searched for corner, but found no evidence.

1966 R.F. Schneider, Registered Land Surveyor Number 5740, found evidence of original corner and established a 2 inch pinched top iron pipe at this corner position from that evidence.

1973 and 1974 Myron Landecker, Licensed Land Surveyor Number 7452, used the corner as perpetuated by Schneider in numerous surveys along the 10th Standard Parallel.

1986 U.S. Forest Service crews set an aerial target over this this corner for the true corner position. The target having coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 a Landecker-Stevenson & Associates crew searched for the corner. The following information was found and noted: 2 inch pinched top iron pipe as established by Schneider that was targeted in 1986 by the U.S. Forest Service. No evidence of original bearing trees. Original evidence as found by Schneider, unknown.

1989 on March 17 a Landecker-Stevenson & Associates crew set a 2 inch by 48 inch iron pipe with brass cap, plastic base and magnet in place of the 2 inch pinched top iron pipe. New bearing trees were marked as shown and a steel sign post was set as noted on front of this certificate. Landecker-Stevenson & Associates accepts this corner, as reestablished by Schneider, a perpetuation of the original corner.