

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 10, Township 139 N., Range 26 W., 5th P.M.

STATE OF MINNESOTA, County of Cass


At the corner location shown on the sketch:

On 02-10-1988 found a 2" IRON PIPE WITH 3" CAP ON ROD IN PIPE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____

SKETCH OF REFERENCE TIES

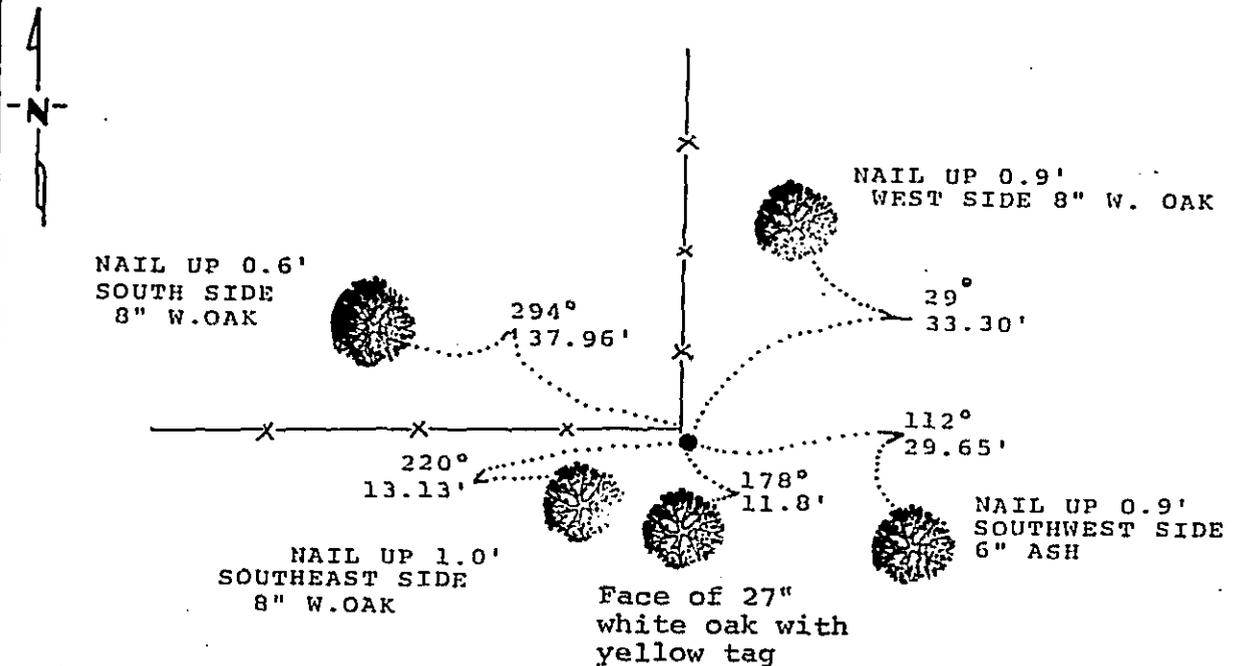

NOTE: MONUMENT IS 1.5' SOUTHEAST OF CORNER FENCE POST.

AZIMUTHS OBSERVED WITH COMPASS

Statement of evidence relative to this corner location is on back of page.

D.D.S. 4-4-88
FILE F-761

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

John D. Walker 3-14-89
SIGNATURE DATE

Registration No. 16098

- Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 3:55 P.M. on the 22 day of May A.D., 19 89

County Recorder Christine Kayler

By ms, Deputy

DOCUMENT NO. 312 279

Northeast Corner Section 10, Township 139 North, Range 26 West

The following offices were contacted for information concerning this corner:

MN Secretary of State
Cass County Surveyor
Mn/DNR Washburn Forestry Station

- 1863 This corner was established by the U.S. General Land Office, marked with a wood post and witnessed by four bearing trees.
- 1937 The Civilian Conservation Corp found a 2" iron pipe, 5 chains (330 feet) east of the highway.
- 1938 The Civilian Conservation Corp records highway #6 as 366 feet west.
- 1954 The DNR Bureau of Engineering found a 2" iron pipe, 1 foot south of fence corner with fences north and west.
- 1988 The DNR Bureau of Engineering found a 2" iron pipe with 3" flat cap on rod stuck into pipe, 1.5 feet southeast of fence corner with fences north and west. Accepted the iron pipe as marking the location of the corner.