

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER



Northeast Corner of Section 16, Township 134N., Range 31W., 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On 10/30/85 found a 1/2" x 18" iron pipe down 1/2'
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 10/23/86 placed a 2" x 18" telespar with an aluminum cap
DATE
down 1'.

SKETCH OF REFERENCE TIES

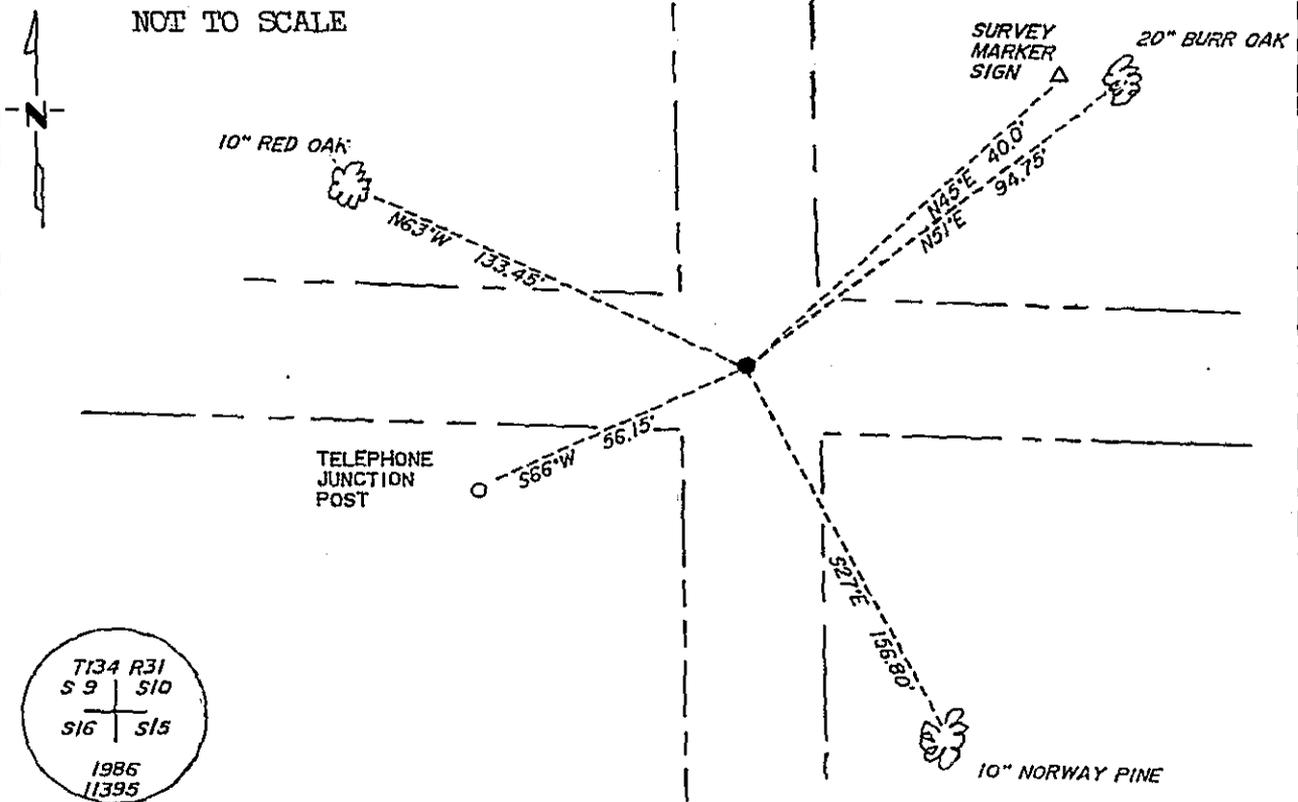

Statement of evidence relative to this corner location is on back of page. 318239

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Bern 1-29-90
SIGNATURE DATE

Registration No. 11395

- Land Surveyor
- County Surveyor

OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 4:11 P. M. on the 31 day of January A.D., 1990

County Recorder Claudine Kayle

By ms, Deputy

DOCUMENT NO. 318239

Statement of Evidence:

J-13

Northeast Corner, Section 16, T.134N., R31W., 5th P.M.

- 1869 U.S. General Land Office survey set a wood post for this corner and marked the following bearing trees: a 6" Aspen N80W 456 links, 10" Aspen S49W 28 links, an 8" Aspen N72E 31 links, and a 6" Aspen S37E 29 links.
- 1912 County Survey Record Book "A", pages 473-477, show a survey by John Curo. He found the corner previously established by Curo from the southeast bearing tree stump and the roots of the northeast and southwest bearing trees. He re-established the corner from the southeast bearing tree stump.
- 1915 County Survey Record Book "B", pages 484-495, show a survey by N.D. Gorman. He found an iron monument for the corner.
- 1985 On October 30, Cass County Survey Technician Terry Freeman found a $\frac{1}{2}$ " x 18" iron pipe down 0.5'.
- 1986 On October 23, Terry Freeman paced a 2" x 18" telespar monument with an aluminum cap down 1'.