

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


North Quarter Corner of Section 12, Township 134N., Range 31W., 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On 11/1/85 found a 2" iron pipe down 0.1' with the top 1' bent to the southwest.
 left monument as found, lowered monument, removed monument (explain)
- On 8/5/87 placed a 2" x 18" telespar monument with a stamped aluminum cap down 1".

SKETCH OF REFERENCE TIES

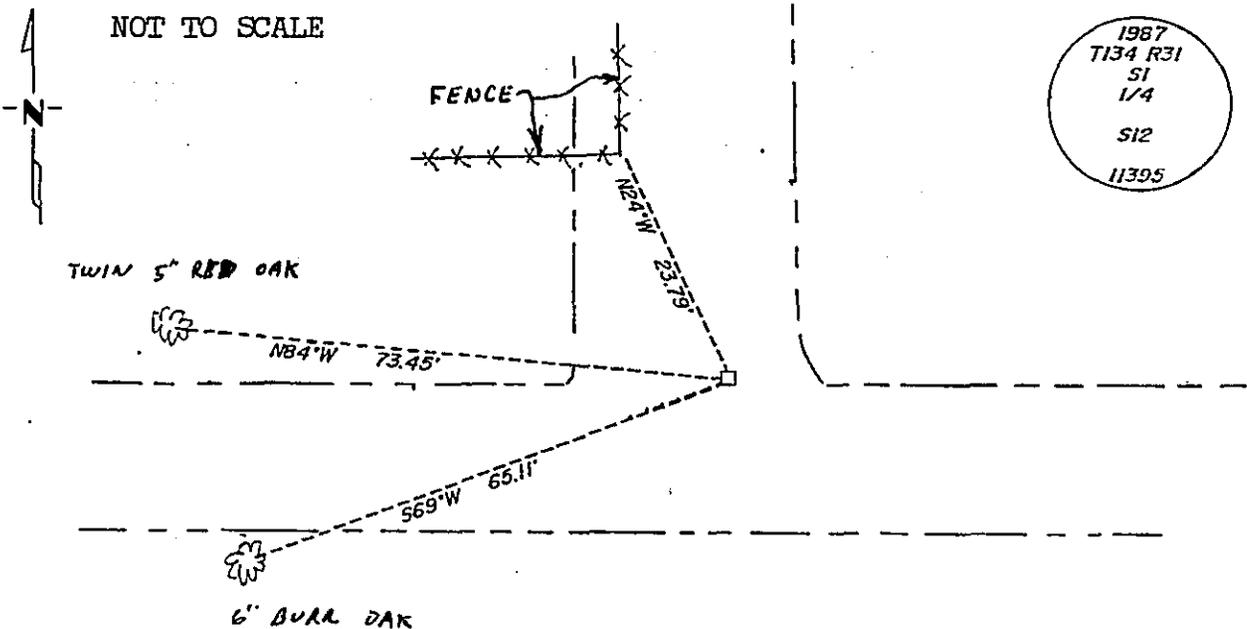

1987
 T134 R31
 S1
 1/4

 S12

 11395

Statement of evidence relative to this corner location is on back of page. 318316

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Cass 2-5-90
SIGNATURE DATE

Registration No. 11395

- Land Surveyor
- County Surveyor

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 3:50 P. .M. on the 5 day of February A.D., 19 90

County Recorder Clondine Kayler
 By MS, Deputy

DOCUMENT NO. 318316

Statement of Evidence:

E-23

North Quarter Corner, Section 12, T.134N., R.31W., 5th P.M.

- 1869 U.S. General Land Office survey set a wood post for this corner and marked the following bearing trees: a 6" oak N50E 18 links and a 2" Aspen S20E 24 links.
- 1915 County Survey Record Book "C", page 88, shows a survey by E.B. Horst. He set a 3"x 3"x 36" wood post proportionally.
- 1916 County Survey Record Book "C", page 91, shows a survey by E.B. Horst. He set an iron monument in the place of the post.
- 1985 On November 1, Cass County Survey Technician Terry Freeman found a 2" iron pipe down 0.1' with the top 1' bent southwest. It lined up with north edge of road that ran east to west. A survey marker sign was set north 15'.
- 1987 On August 5, Terry Freeman removed the bent iron pipe and set a 2"x18" telespar with a stamped aluminum cap.