

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Center Quarter Corner of Section 21, Township 141N, Range 28W., 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

On 3/18/87 found a 1" x 36" iron pipe monument with a stamped USGLO ^{DATE} brass cap up 6"


left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____

DATE

SKETCH OF REFERENCE TIES

NOT TO SCALE

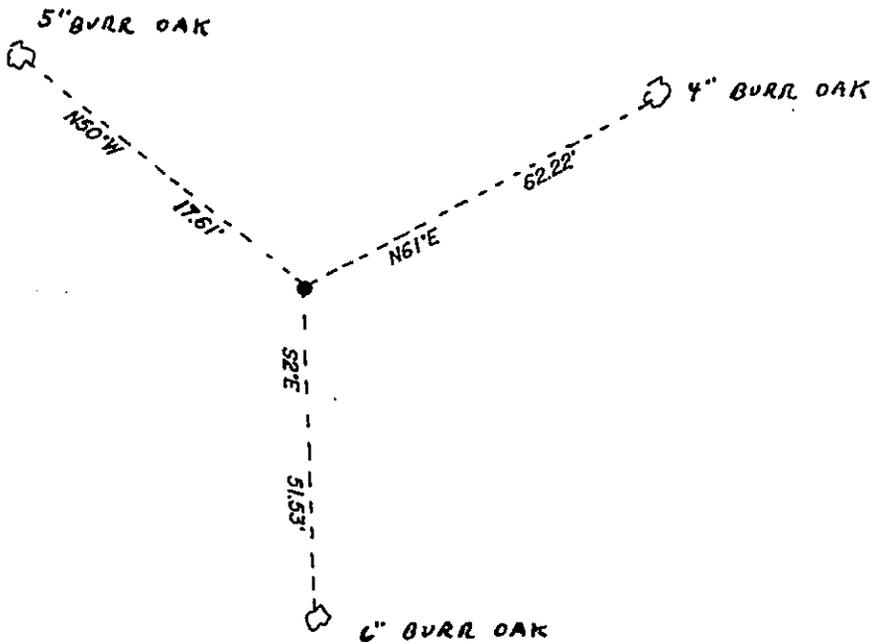

Statement of evidence relative to this corner location is on back of page. 319091

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter L. Cass 3-15-90
SIGNATURE DATE

Registration No. 11395

Land Surveyor

County Surveyor

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 3:10 P. .M. on the 19 day of March A.D., 1990

County Recorder Claudine Keyler

By M.S., Deputy

DOCUMENT NO. 319091

Statement of Evidence:

P-11

Center Quarter Corner, Section 21, T.141N., R.28W., 5th P.M.

- 1918 U.S. General Land Office survey set a 1"x 36" iron pipe monument with a stamped brass cap up 6" and marked the following bearing trees: a 12" Red Oak N55E 305 links and a 14" White Oak N88½W 240 links.
- 1987 On March 18, Land Surveyor Walter Curo and Cass County Survey Technician Terry Freeman found the USGLO monument in good condition up 6". They marked the following new bearing trees: a 4" Burr Oak N61E 62.22', a 6" Burr Oak S2E 51.53', and a 5" Burr Oak N50W 17.61'.