

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 36, Township 143N, Range 26W, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

On 11-3-1989 found a 2" X 60" brass capped monument  
DATE


left monument as found,  lowered monument,  removed monument (explain)

On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

Monument Marked

SKETCH OF REFERENCE TIES  
not to scale

T143N  
R26W R25W  
S25 S30  
S36 S31  
1963  
RLS 6807

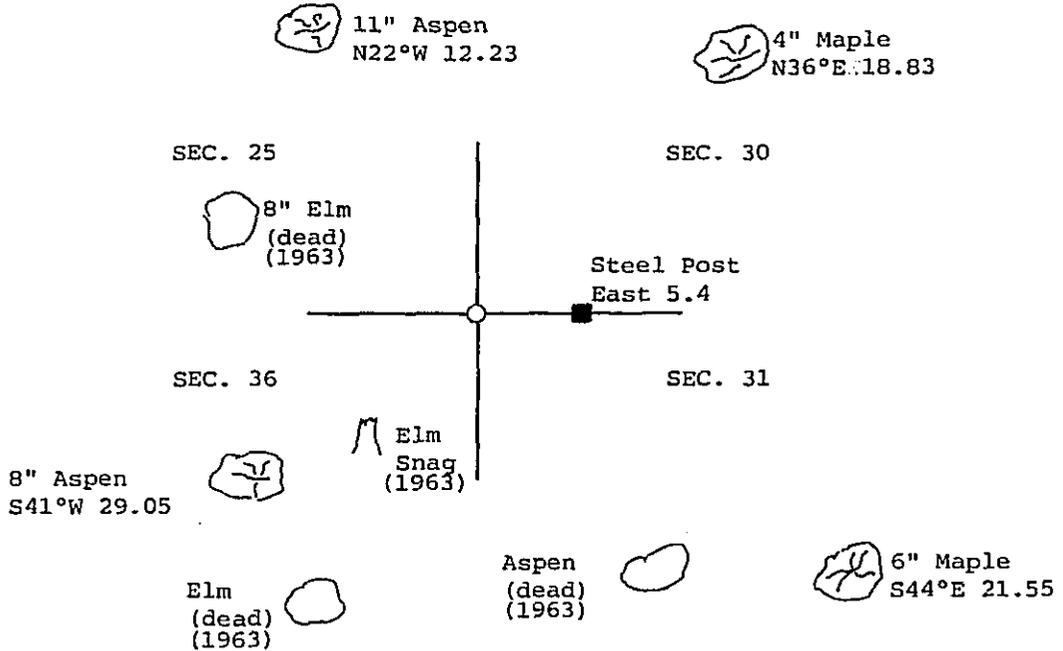

bearings are true

All trees are scribed, painted with a 30d spike in side and USFS 54-3 tag.

Statement of evidence relative to this corner location is on back of page. 319621

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

William C. Draper

Date 3/20/90 Registration No. 17767

OFFICE OF THE COUNTY RECORDER  
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 10:35 A. on the 12 day of April A.D., 19 90

County Recorder Clairine Kayler  
 By M. I., Deputy

DOCUMENT NO. 319621

Statement of Evidence:

V25 Northeast corner section 36

Cor. 30,31,25 and 36 (NE Cor. Sec. 36)

- 1872 U.S. General Land Office survey set wood post for corner, the following references were noted:  
White Pine 14° S 9 degrees 30 minutes W, 12 Links ( 7.92 feet)  
Birch 8° N 21 degrees W, 13 Links ( 8.58 feet)  
Birch 6° N 14 degrees 30 minutes E, 10 Links ( 6.60 feet)  
Sugar 8° S 41 degrees E, 14 Links ( 9.24 feet)
- 1937 John Gjelhaug, USFS, found the following BT:  
White Pine stump 16° S 9 degrees 30 minutes W, 9 Links (5.94)  
he set a cedar post and the following witness;  
Aspen stump 5° S 6 degrees W, 22 Links (14.52 feet)
- 7-7-1966 James Ekstrom, USFS, chained to area, heavily burned over, no evidence found.
- 9-30-1968 W. Okerman and C. Krause, USFS, found 1937 squared post, rotted.
- 10-15-1968 C.Krause, USFS, set a 2"x 60" steel pipe with bronze cap from remains 1937 survey, documented in Forest Service Record and witnessed as follows:  
Elm 7° N 45 degrees W, 5.50 feet  
Elm 5° S 8 degrees W, 16.15 feet  
Elm 4° S 26 degrees W, 29.10 feet  
Aspen 8° S 36 degrees E, 45.10 feet  
Steel sign post with sign attached, East 5.40 feet
- 1976 BLM Dependent Resurvey recovered 1963 monument and the following witnesses:  
Elm 7° N 45 degrees W, 8 Links (5.3 feet)  
Elm 5° S 8 degrees W, 24.5 Links (16.2 feet)  
Elm 4° S 26 degrees W, 44 Links (29.0 feet)  
Aspen 8° S 36 degrees E, 68 Links (44.9 feet)  
Steel sign post with sign attached, East 8 Links (5.3 feet)
- 6-12-1979 A Certificate of location of Government corner was filed for record in the Cass County Recorders Office from the 1963 information by Milo E. Stefan, RLS, as Doc. No. 245212.
- 7-21-1982 G. Kosenko, K. Matson, U.S.F.S., found 1963 monument and the following witnesses:  
Elm 9° N 46 degrees W, 4.95 feet  
Elm 7° S 10 degrees W, 15.75 feet  
Elm 6° S 26 degrees W, 28.71 feet  
Aspen 10° S 34 degrees E, 44.47 feet  
Steel sign post with sign attached, East 5.2 feet  
White Pine stump burned S 14 degrees W, 7.4 feet
- 11-3-1989 Personnel from Kovanen & Osufsen Inc. found 1963 USFS monument in good condition and witnesses as follow:  
Elm 9° N 45 degrees W, standing dead  
Elm 7° S 10 degrees W, dead snag  
Elm 6° S 26 degrees W, standing dead  
Aspen 10° S 34 degrees E, standing dead  
Steel sign post with sign attached, East 5.4 feet  
we add witnesses as follow:  
Aspen 11° N 22 degrees W, 12.23 feet  
Maple 4° N 36 degrees E, 18.83 feet  
Maple 6° S 44 degrees E, 21.55 feet  
Aspen 8° S 41 degrees W, 29.05 feet

This position is traceable to the original GLO corner.