

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 14, Township 143N, Range 26W, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:



On 10-20-1989 found a 2" iron pipe
DATE

left monument as found, lowered monument, removed monument (explain)

On 4-30-1990 placed a 2" X 54" brass capped monument in place of 2" iron
DATE

Monument Marked

SKETCH OF REFERENCE TIES
not to scale

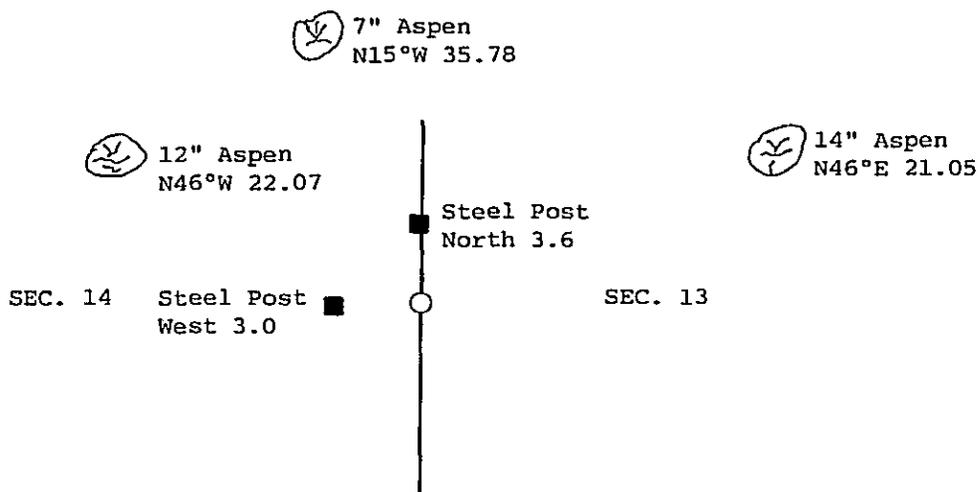

bearings are true

All trees are scribed, painted with a 30d spike in side and USFS 54-3 tag.

Statement of evidence relative to this corner location is on back of page. 323159

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

William C. Osborn

Date 8/22/90 Registration No. 17767

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 3:18 P.M. on the 28 day of August A.D., 19 90

County Recorder Cherline Kayler

By ms, Deputy

DOCUMENT NO. 323159

Statement of Evidence:

L21 East quarter corner section 14

1/4 Cor. 13 and 14 (E 1/4 Cor. Sec. 14)

- 1872 U.S. General Land Office survey set wood post for corner and the following references were noted:
Tamarack 10" S 51 degrees W, 12 Links (7.92 feet)
Spruce 8" S 58 degrees E, 40 Links (26.40 feet)
- 1920 J.H. Flynn, Cass County survey notes for Town of Salem road No. 5 state, chain north, 2628.5, set corner and witness as follows:
W. Pine stump 12" S 71 degrees 20 minutes E, 23.25 feet
- 1969 Curt Krause, USFS, searched area no evidence of corner, or BT's mentioned.
- 10-20-1989 Personnel from Kovanen & Osufsen Inc. traverse to search area, find 2" iron pipe at fence corner, Mr. Bulluck, land owner states this pipe has been here since 1940's and has been accepted as the corner. Our distance to iron pipe monument at Northeast corner is 2629.82, (1920 dist. 2628.5), feel this corner position is from 1920 Survey by J.H. Flynn, Cass County Surveyor.
- 4-30-1990 Personnel from Kovanen & Osufsen Inc. replaced 2" iron pipe with a 2" x 54" brass capped monument and the following witnesses:
Aspen 14" N 46 degrees E, 21.05 feet
Aspen 12" N 46 degrees W, 22.07 feet
Aspen 7" N 15 degrees W, 35.78 feet
Set 8' long steel sign post with sign attached, West 3.0 feet
Set 8' long steel sign post with sign attached, North 3.6 feet

This position is not traceable to the original GLO corner, but accepted as corner for lack of further evidence.