

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 6, Township 140, Range 31, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:



On \_\_\_\_\_ found a \_\_\_\_\_  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On 6/4/90 placed a 2" square tubular monument with aluminum cap  
DATE

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES  
Not to Scale

All distances are horizontal to nail in side of tree

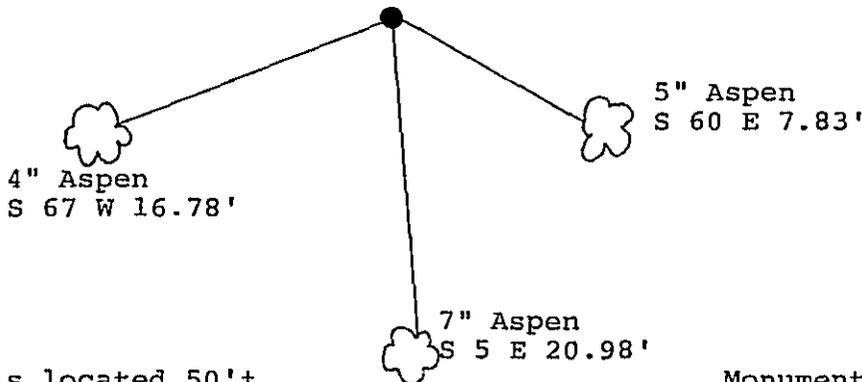

Monument is located 50'± northerly of swamp southerly line to standard East & West. Set a 6' steel sign post West 2.0'.

Monument Stamped  
R31W  
S32 T141N  
S6/S5 T140N  
1990  
RLS 17008

Statement of evidence relative to this corner location is on back of page. 325136

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Alvin J. Schuler 11/15/90  
SIGNATURE DATE

Registration No. 17008

Land Surveyor,  Professional Engineer  
 County Surveyor,  County Engineer

OFFICE OF THE REGISTER OF DEEDS  
County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 3:50 P.M. on the 21 day of November A.D., 19 90

Register of Deeds Claudia Kayla  
By MJ Deputy

DOCUMENT NO. 325136

Northeast corner Section 6, Township 140  
North, Range 31 West, Cass County, Minnesota

A-5 140-31

1870 set a C.C. post and marked the following bearing tree: a 4 inch Aspen North a distance of 10 links.

1980's Walt Curo, Registered Land Surveyor Number 11395, surveying in Section 5 set a railroad spike for corner.

December 1989, a Landecker-Stevenson & Associates, Inc., survey crew found a railroad spike set by Curo while surveying in Section 5. Position checks for lost position for closing corner as established between the standard Southwest corner and standard South Quarter corner of Township 141 North, Range 31 West.

6/4/90 a Landecker & Associates, Inc., Walker, Minnesota, survey crew set a 2 inch square tubular monument with aluminum cap. Three new bearing trees were marked and sign post set as shown on front of this certificate.