

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter _____ Corner of Section 27, Township 143N, Range 26W, 5th P.M.



STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 6-26-90 placed a 2 inch x 54 inch Brass capped monument
DATE

Monument marked
T143N, R26W
1/4

SKETCH OF REFERENCE TIES Not to scale

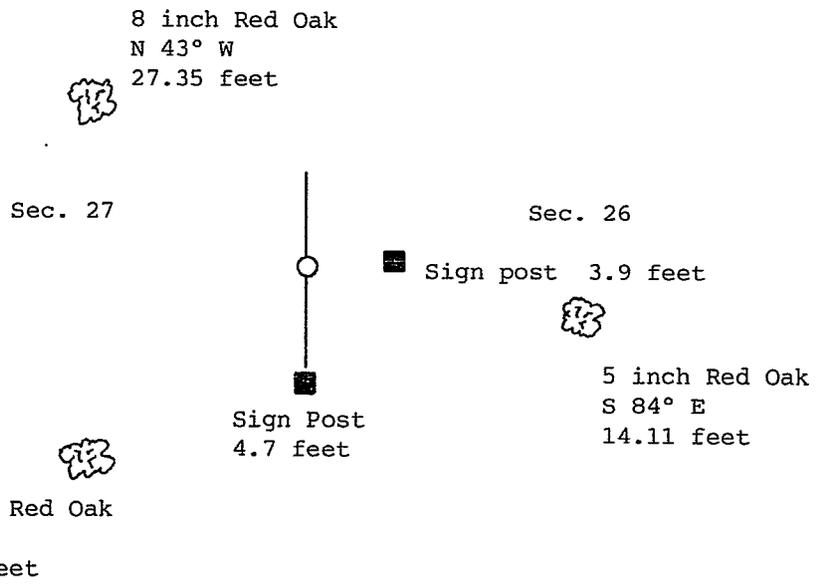

All bearings true

All trees are scribed, painted with a 30d spike, and USFS 54-3 tag.

Statement of evidence relative to this corner location is on back of page. 325145

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

William C. Campen

Date 11/14/90 Registration No. 17767

OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 3:59 P.M. on the 21 day of November A.D., 19 90

County Recorder Clodine Kayler
By MS, Deputy

DOCUMENT NO. 325145

Statement of Evidence:

T17 East quarter corner section 27

1/4 Cor. 26 and 27 (E 1/4 Cor. Sec. 27)

- 1872 U.S. General Land Office survey set wood post for corner and the following references were noted:
Birch 8" S 79 degrees E, 22 Links (14.52 feet)
Birch 12" S 47 degrees W, 10 Links (6.60 feet)
- 1969 Curt Krause, USFS, chained to search area from section corner to south, no evidence of corner, or BT's found.
- 11-10-1989 Personnel from Kovanen & Osufsen Inc. chain to search area from section corner to west, no evidence of corner found.
- 4-13-1990 Personnel from Kovanen & Osufsen Inc. traverse to search area, no further evidence of corner found.
- 6-26-1990 Personnel from Kovanen & Osufsen Inc. set a 2" x 54" brass capped monument midway and on line between the reestablished NE corner of section 27 and the reestablished SE corner of section 27. The following witnesses were established:
R. Oak 8" N 43 degrees W, 27.35 feet
R. Oak 12" S 66 degrees W, 24.94 feet
R. Oak 5" S 84 degrees E, 14.11 feet
Set 8' long steel sign post with sign attached, East 3.9 feet
Set 8' long steel sign post with sign attached, South 4.7 feet

This position is not traceable to the original GLO corner, but accepted as corner for lack of further evidence.