

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 35, Township 143N, Range 26W, 5th P.M.

STATE OF MINNESOTA, County of Cass


At the corner location shown on the sketch:

- On 6-21-90 found a 2 inch x 54 inch Brass capped monument leaning, reset from ties, and then retied corner to nails, put in found BT's.  
 left monument as found,  lowered monument,  removed monument (explain)
- On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

Monument marked

### SKETCH OF REFERENCE TIES

Not to scale

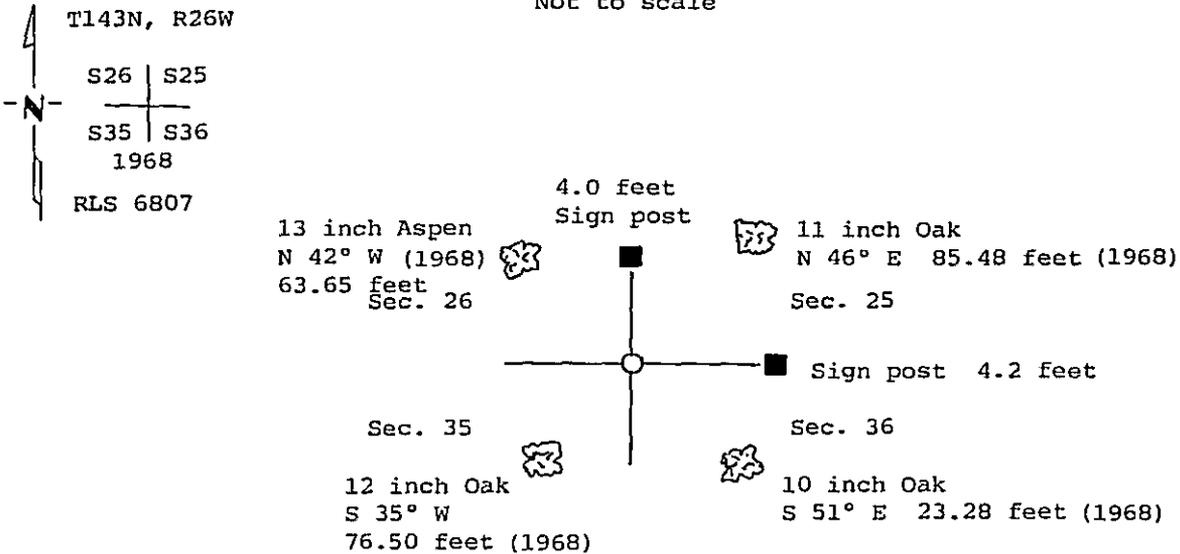

All bearings true

All trees scribed, painted with a 30d spike, and USFS 54-3 tag.

Statement of evidence relative to this corner location is on back of page.

325152

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

William C. Osburn

Date 11/14/90 Registration No. 17767

#### OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 4:06 P.M. on the 21 day of November A.D., 1990

County Recorder Claudia Kayler

By ms, Deputy

DOCUMENT NO. 325152

Statement of Evidence:

V21 Northeast corner section 35

Cor. 25,26,35 and 36 (NE Cor. Sec. 35)

- 1872 U.S. General Land Office survey set wood post for corner and the following references were noted:  
W. Pine 8" N 40 degrees E, 10 Links ( 6.60 feet)  
Birch 14" S 14 degrees W, 10 Links ( 6.60 feet)  
Birch 8" N 65 degrees W, 6 Links ( 3.96 feet)  
W. Pine 12" S 14 degrees E, 30 Links (19.80 feet)
- 1937 Gjelhaug, USFS, found the following BT;  
W. Pine 16" S 14 degrees E, 30 Links  
he set a 1.5" iron pipe and witnessed as follows;  
W. Pine 8" S 20 degrees W, 100 Links (66.00 feet)
- 10-14-1968 Elloit and Krause, USFS, found evidence of original survey, they set a 2" x 60" brass capped monument and the following witnesses:  
R. Oak 6" N 46 degrees E, 85.5 feet  
R. Oak 6" S 35 degrees W, 76.30 feet  
Aspen 6" N 42 degrees W, 63.6 feet  
R. Oak 7" S 51 degrees E, 23.45 feet  
Steel sign post East, 5.1 feet
- 4-18-1979 Milo E. Stefan, filed a Certificate of Location of Government Corner in the office of Cass County Recorder as Document No. 246198, from 1968 information and states original evidence of 1872 survey documented in Forest Service Record.
- 3-5-1981 USFS personnel, found 1968 monument and the following witnesses:  
R. Oak 10" N 46 degrees E, 85.5 feet  
R. Oak 11" S 40 degrees W, 76.30 feet  
Aspen 11" N 42 degrees W, 63.6 feet  
R. Oak 10" S 51 degrees E, 23.45 feet  
Steel sign post East, 5.1 feet
- 12-11-1989 Personnel from Kovanen & Osufsen Inc. found 1968 monument tipped. They reset monument to 1968 ties, add 60d spikes and measure to the following witnesses:  
R. Oak 11" N 46 degrees E, 85.48 feet  
R. Oak 12" S 40 degrees W, 76.50 feet  
Aspen 13" N 42 degrees W, 63.65 feet  
R. Oak 10" S 51 degrees E, 23.28 feet  
Steel sign post East, 4.2 feet  
Steel sign post North, 4.0 feet

This position is traceable to the original GLO corner.