

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


North Quarter Corner of Section 36, Township 143N, Range 26W, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:


- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 6/21/90 placed a 2"x54" brass capped monument
DATE

Monument marked



SKETCH OF REFERENCE TIES

Not to scale

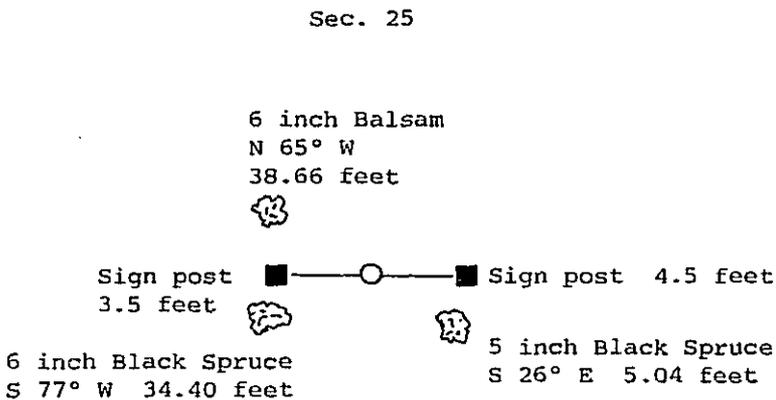

Sec. 36

All bearings true

All trees scribed, painted with a 30d spike, and USFS 54-3 tag.

Statement of evidence relative to this corner location is on back of page. 325153

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

William C. Danfau

Date 11/14/90 Registration No. 17767

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 4:07 P. M. on the 21 day of November A.D., 19 90

County Recorder Claudia Keyler

By m.s., Deputy

DOCUMENT NO. 325153

Statement of Evidence:

V23 North quarter corner section 36

1/4 Cor. 25 and 36 (N 1/4 Cor. Sec. 36)

- 1872 U.S. General Land Office survey set wood post for corner and the following references were noted:
Tamarack 10" S 3 degrees E, 50 Links (33.00 feet)
Tamarack 5" N 83 degrees E, 20 Links (13.20 feet)
- 5-19-1937 Gjelhaug, USFS, established corner lost, he set a 4" X 4" post and witnessed as follows;
Dead Tamarack 6" N 80 degrees W, 9 Links (5.94 feet)
- 10-14-1968 C. Krause, USFS, searched area, found no evidence of corner or BT's.
- 11-13-1989 Personnel from Kovanen & Osufsen Inc. chained to area from section corner to west, no Tamarack remain in this area, no evidence of corner found.
- 6-21-1990 Personnel from Kovanen & Osufsen Inc. set a 2" x 54" brass capped monument midway and on line between the recovered NE corner of section 36 and the recovered NW corner of section 36. The following witnesses were established:
Black Spruce 5" S 26 degrees E, 5.04 feet
Balsam 6" N 65 degrees W, 38.66 feet
Black Spruce 6" S 77 degrees W, 34.40 feet
Set 8' long steel sign post with sign attached, West 3.5 feet
Set 8' long steel sign post with sign attached, East 4.5 feet

This position is not traceable to the original GLO corner, but accepted as corner for lack of further evidence.