

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter _____ Corner of Section 35, Township 143N, Range 26W, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:


On _____ found a _____
DATE

left monument as found, lowered monument, removed monument (explain)

On 6/14/90 placed a 2 inch x 54 inch Brass Cap Monument as Witness
DATE
Corner 90.00 South of Quarter Corner position.

Monument marked

SKETCH OF REFERENCE TIES Not to scale

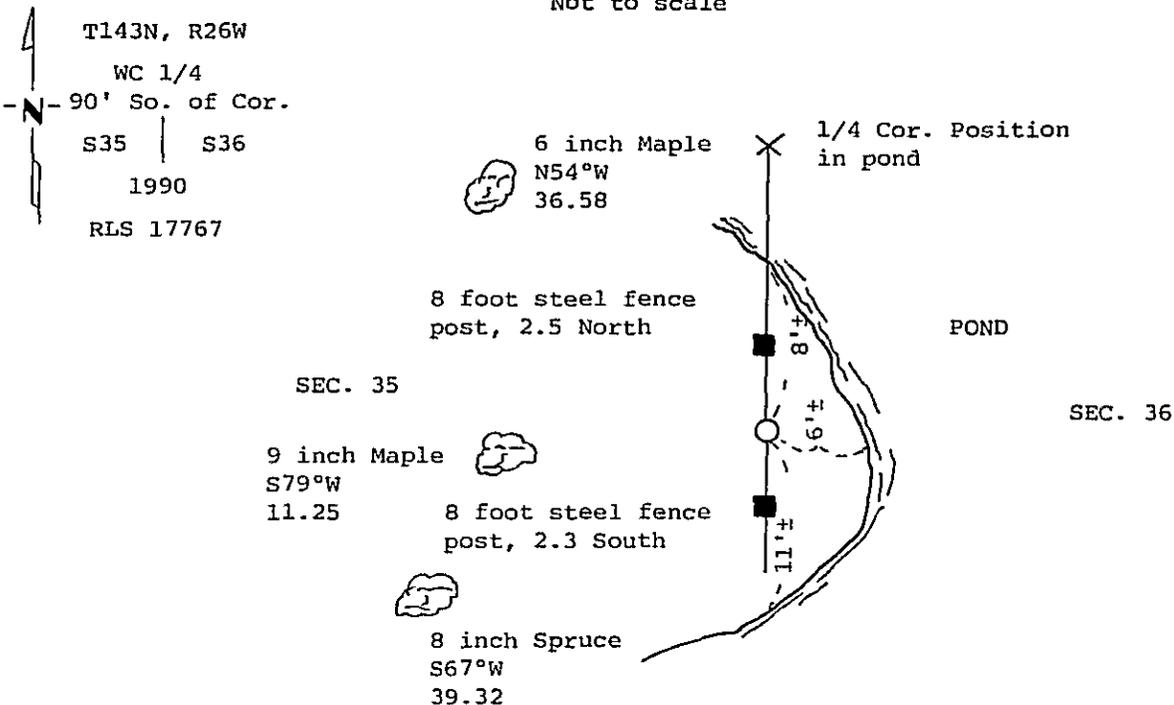

Bearings are true

All trees are scribed, painted, with a 30d spike in side and a USFS 54-3 tag.

Statement of evidence relative to this corner location is on back of page. 325157

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

William C. Ormiston

Date 11/14/90 Registration No. 17767

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 4:11 P. .M. on the 21 day of November A.D., 19 90

County Recorder Blondine Kayler

By m.), Deputy

DOCUMENT NO. 325157

Statement of Evidence:

X21 East quarter corner section 35

1/4 Cor. 35 and 36 (E 1/4 Cor. Sec. 35)

- 1872 U.S. General Land Office survey set wood post for corner and the following references were noted:
Aspen 10" N 73 degrees E, 11 Links (7.26 feet)
W. Pine 6" N 88 degrees W, 7 Links (4.62 feet)
- 1937 Gjelhaug, USFS, established corner lost, he set a 1.5" iron pipe and witnessed as follows;
Aspen 8" S 45 degrees W, 58 Links (38.28 feet)
- 6-19-1940 CCC notes from USFS files, R.T. DeFant found county corner stake, he states corner is along edge of pot hole and adds a metal location poster to following:
Aspen 14" S 45 degrees W, 39 feet
- 10-14-1968 C. Krause, USFS, searched area, found no evidence of corner or BT's, states area has been cut and burned years back.
- 6-29-1976 R.Emery. and R.Oleson., USFS, found no evidence, set an approximate corner tag.
- 11-13-1989 Personnel from Kovanen & Osufsen Inc. search area, no evidence of corner found, this search area falls in a pond.
- 6-14-1990 Personnel from Kovanen & Osufsen Inc. set a 2" x 54" brass capped monument 90.0 feet South as a witness corner to the Quarter corner position which is midway and on line between the recovered NE corner of section 35 and the recovered SE corner of section 35. The following witnesses to the WC monument were established:
Maple 6" N 54 degrees W, 36.58 feet
Maple 9" S 79 degrees W, 11.25 feet
Spruce 8" S 67 degrees W, 39.32 feet
Set 8' long steel sign post with sign attached, North 2.5 feet
Set 8' long steel sign post with sign attached, South 2.3 feet

This position is not traceable to the original GLO corner, but accepted as corner for lack of further evidence.