

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northwest \_\_\_\_\_ Corner of Section 19, Township 142, Range 31, 5th P.M.


STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On \_\_\_\_\_ found a \_\_\_\_\_  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On 1/29/91 placed a 2 inch by 48 inch iron pipe with brass cap  
DATE

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES  
 Not to Scale

All distances are horizontal to nail in side of tree




6" Burr Oak  
 N 70 W 52.52'

7" Burr Oak  
 N 64 E 25.00'

Monument is located near southwesterly edge of swamp.  
 8' steel sign post northerly 3.25'.

All trees are scribed, painted with red enamel and marked with a 54-3 (bearing tree) tag.

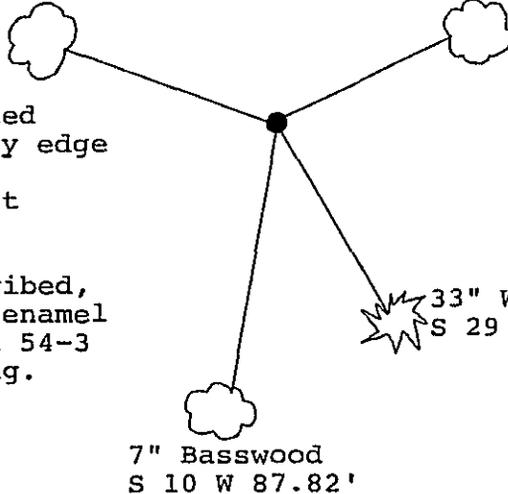

Monument Stamped  
 T142N  
 R32W R31W  
 S13 S18  
 S24 S19  
 1991  
 RLS 17008

7" Basswood  
 S 10 W 87.82'

33" White Pine  
 S 29 E 57.10'

Statement of evidence relative to this corner location is on back of page. 327270

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

*David A. Leckie* 3/6/91  
SIGNATURE DATE

Registration No. 17008

- Land Surveyor,  Professional Engineer  
 County Surveyor,  County Engineer

## OFFICE OF THE REGISTER OF DEEDS

County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 2:35 P. M. on the 11 day of March A.D., 1991

Register of Deeds *Claudia Kayler*  
 By *ms*, Deputy

DOCUMENT NO. 327270

Northwest corner, Section 19, Township 142 North,  
Range 31 West, Cass County, Minnesota

N-1 142-31

1871 George Stuntz, U.S. Deputy Surveyor, originally established this corner position while running the West line of Township 142 North, Range 31 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: an 8 inch Aspen North 7 degrees West a distance of 15 links; an 8 inch Aspen North 25 degrees East a distance of 16 links; an 18 inch White Pine South 12 degrees West a distance of 54 links; and an 8 inch Black Oak South 33 degrees East a distance of 66 links.

1921 Cass County Surveyor's Record Book C, page 472, shows survey by E.B. Horst. A 2 inch by 48 inch iron monument was set proportionally between the Northwest corner of Section 18 and the West Quarter corner of Section 19.

1921 County resurvey in County Recorder's Office file cabinet E number 59 shows survey by E.B. Horst. A 2 inch by 48 inch iron monument was found.

1987-1988 United States Forest Service personnel search for corner and traverse the West line of the township. They find a 1 and 1/2 inch iron pipe as set by Horst in 1921 at this corner. They also found original corner evidence at the West Quarter corner of Section 19 approximately 300 feet southeast of the 1921 Horst position.

1990-1991 Landecker and Associates, Inc. review USFS traverse and search notes along the West line of Township. A new corner position was computed for this corner using the West Quarter corner of Section 19 as recovered by the USFS and searched. No original evidence found. On January 29, 1991 the survey crew set a 2 inch by 48 inch iron pipe with brass cap up 12 inches at the single proportion position between the existing Northwest corner of Section 18 and the obliterated position for the West Quarter corner of Section 19. The 1 and 1/2 inch 1921 Horst iron pipe is North 49 degrees West a distance of 204 feet. New bearing trees were marked and a steel sign post set as noted on front of this certificate.