


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 6, Township 134, Range 31, 5th P.M.
STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 10-1993 placed a 1/2" iron pipe monument capped R.L.S. No. 16097
DATE

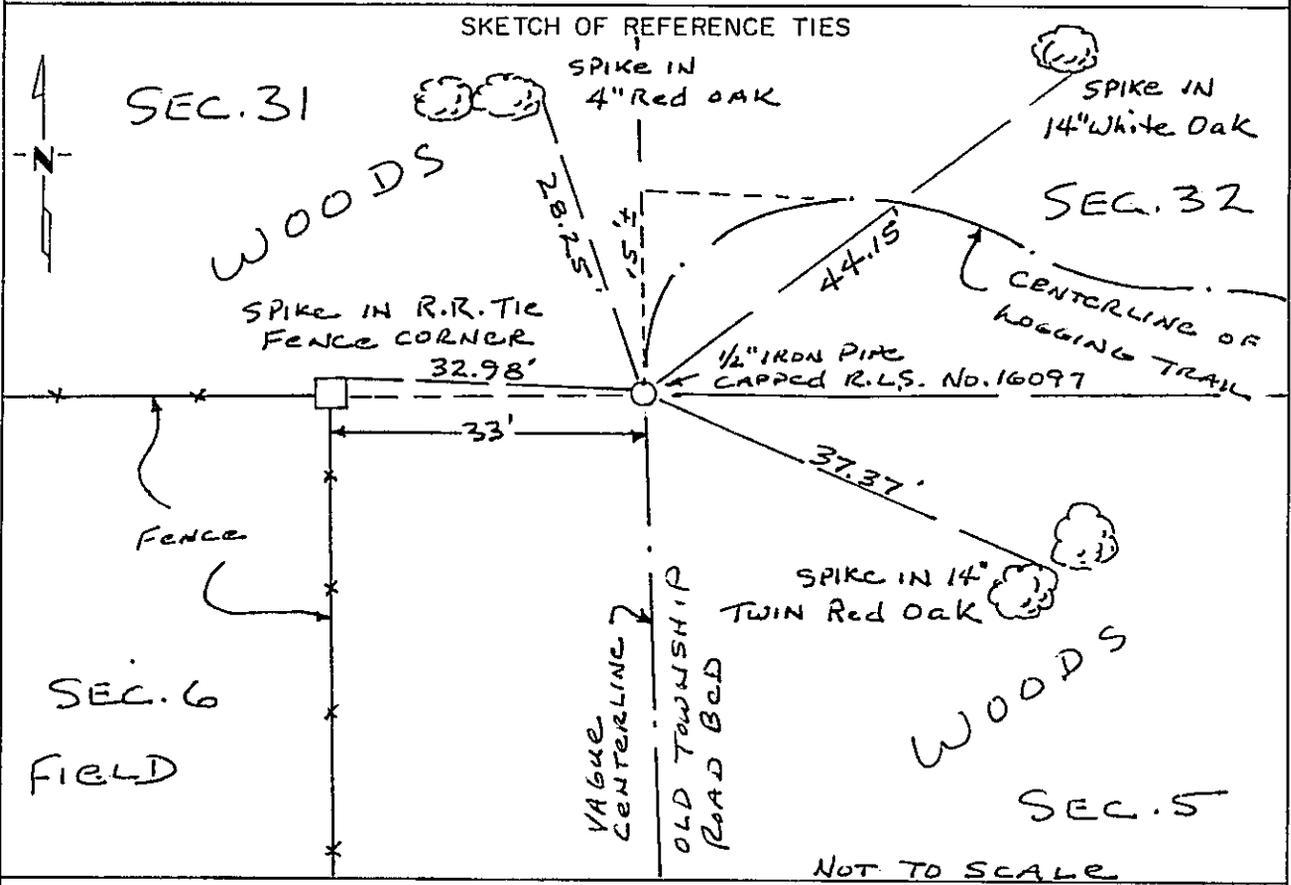

Statement of evidence relative to this corner location is on back of page. 357098

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision

[Signature]
SIGNATURE
April 18, 1994
DATE

Registration No. 16097
 Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER
County of CASS

I hereby certify that this document was filed in the Co. Recorders office at 9:50 A. M. on the 26th day of APRIL A.D., 19 94

County Recorder Claudia Kaylar
By N.B. MICROFILM, Deputy

DOCUMENT NO. 357098

Statement of Evidence:

The Northeast Corner of Section 6, Township 134, Range 31, 5th Principal Meridian, Cass County, Minnesota, was set under the Public Land Survey as a post with four bearing trees in 1858. No traces of post or bearing trees now exist.

On June 25, 1902, May Township issued a Supervisor's Road Order and laid out by survey a 4 rod road centered on the line between Sections 5 and 6, and Sections 7 and 8.

The County Surveyor's Office was contacted and corner card information was obtained.

In 1993, while surveying the perimeter of Section 5, the obliterated position for the northwest corner of Section 5, being also the northeast corner of Section 6, was searched at a point on the extension east of an east-west fence 33 feet (2rods) east of a north-south fence. No evidence of the corner was found during a hand digging and scanning with a metal detector. A 1/2 inch iron pipe capped RLS No. 16097 was set at this obliterated position and is accepted as the position for the northeast corner of Section 6.