

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


West Quarter Corner of Section 18, Township 145, Range 31, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 3/14/94 placed a 2" X 30" Square tube with MN/DOT Cast Iron Cap.
DATE
Top of monument 0.5 feet above ground.

SKETCH OF REFERENCE TIES

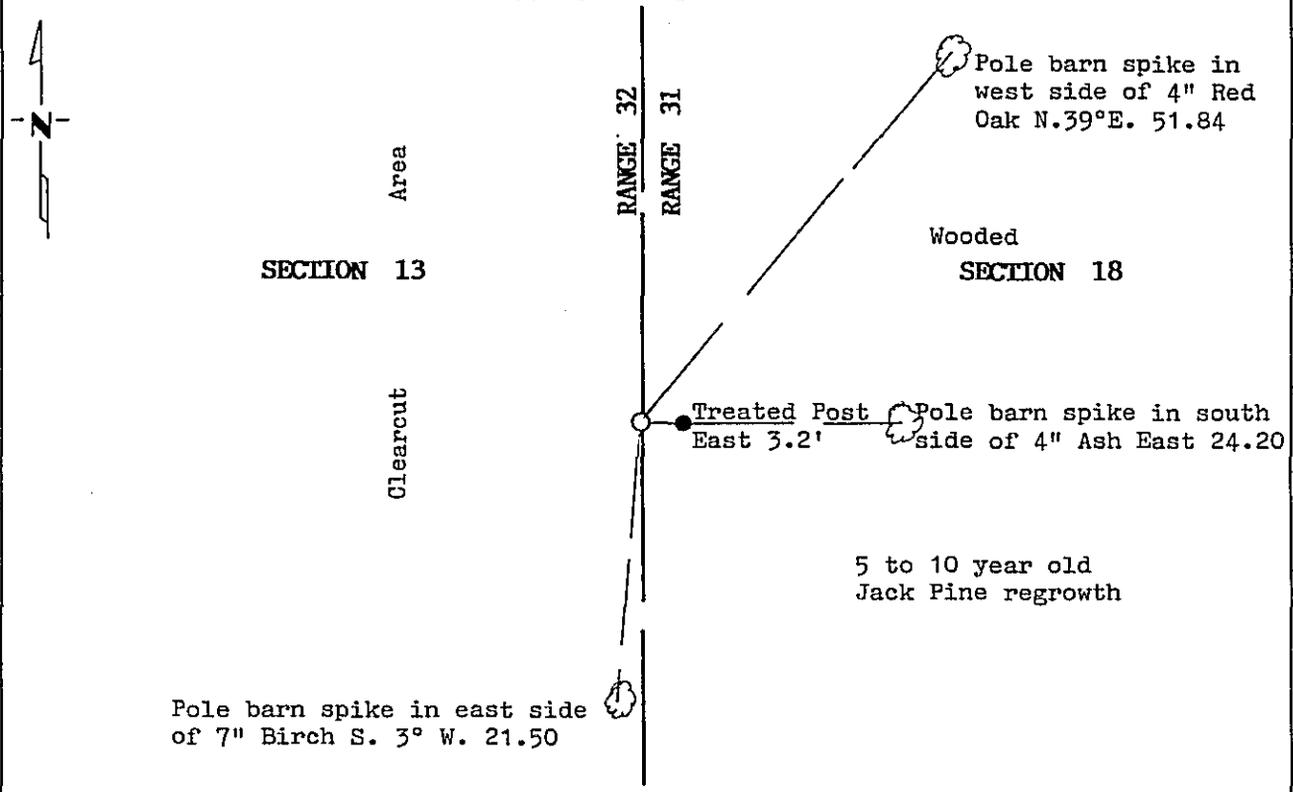

Trees double blazed and scribed.

Statement of evidence relative to this corner location is on back of page. 357123

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Robert W. Murray 3-20-94
SIGNATURE DATE

Registration No. 15483

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER
County of CASS

I hereby certify that this document was filed in the Co. Recorders office at 2:00 P.M. on the 26th day of APRIL A.D., 1994

County Recorder Claudia Kayla
By NB MICROFILM, Deputy

DOCUMENT NO. 357123

Statement of Evidence:

WEST QUARTER CORNER SECTION 18, TOWNSHIP 145 NORTH,
RANGE 31 WEST, FIFTH PRINCIPAL MERIDIAN

1871 The original Public Land Survey was run by George Stuntz. A scribed post was set to mark corner and witness ties were recorded:

9" Black Pine N. 57° E. 144 links

10" Black Pine N. 1° W. 516 links

1981 Terrance Johnson, RLS, subdivided Section 18, T. 145 N., R. 31 W. and found no evidence of corner. He established corner lost, on line split between northwest and assumed southwest corner of Section 18.

1993 Murray Surveying, Inc., found no evidence of Johnson monument and established quarter corner lost between found northeast and southeast corners of Section 13, T. 145 N., R. 32 W.

For information regarding this survey, contact Murray Surveying, Inc., Bemidji, MN.