

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 26, Township 141, Range 27, 5th P.M.
 STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 3/3/94 placed a 2 inch by 24 inch iron pipe with brass cap
DATE
up 20 inches over an 8 foot steel sign post.


Magnetic Decl: 5° East SKETCH OF REFERENCE TIES
 Not to Scale

All distances are horizontal to nail in side of tree



Monument is located in Cedar swamp.
 8' steel sign post South 3.0'.
 8' steel sign post North 3.2'.

MONUMENT STAMPED:
 T141N R27W
 $\frac{1}{4}$
 S26+S25
 1994
 RLS No. 21367

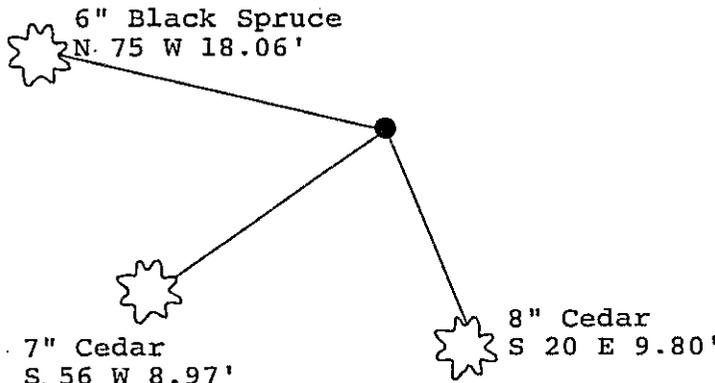

All bearing trees are scribed, painted with red enamel and marked with a 54-3 (bearing tree) tag.

Statement of evidence relative to this corner location is on back of page.

357312

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

Terry L. Freeman
 Terry L. Freeman
 Date 5/4/94 Registration No. 21367

OFFICE OF THE COUNTY RECORDER
 County of CASS

I hereby certify that this document was filed in the Co. Recorders office at 10:20 A.M. on the 4th day of MAY A.D., 19 94

County Recorder Claudia Kaylar
 By N.B. PROFFER, Deputy
 DOCUMENT NO. 357312

Statement of Evidence:

East Quarter corner, Section 26, Township 141
North, Range 27 West, Cass County, Minnesota

T-21

1874 P.H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 27 West. The notes indicate that he set a wood post and marked the following bearing trees: a 6 inch Cedar East a distance of 25 links (16.50 feet); and an 8 inch Cedar North 75 degrees West a distance of 30 links (19.80 feet).

1967 United States Forest Service notes for Township 141 North, Range 27 West, on file in United States Forest Service office in Cass Lake, Minnesota, in Book 2, Page 9, show that United States Forest Service Technicians chained to this location from evidence found at the Section corner of 23-24-25-26. They searched for 2 man hours and found no evidence of the original post or ties.

1977 Okerman Surveying, Bemidji, Minnesota, while working in Section 26, compute the lost, single proportion position between the Northeast and Southeast corners of Section 26 for the corner position.

1993 in October, a Landecker & Associates, Inc. survey crew compass and chain into area of corner to search for original survey evidence and found nothing. 1994 in January, while traversing around Section 26, a Landecker & Associates, Inc. survey crew finds their search area to cover the correct area. On March 3, 1994, after a final search for original survey evidence, they set a 2 inch by 24 inch iron pipe with brass cap up 20 inches over an 8 foot steel sign post. New bearing trees were marked and steel sign posts set as noted on front of this certificate.

Landecker & Associates, Inc. established this corner at the lost, single proportion position between the Northeast and Southeast corners of Section 26.