

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Southeast Corner of Section 35, Township 141, Range 27, 5th P.M.


STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On 12/14/93 found a 2 inch by 5 foot galvanized steel pipe filled with concrete and capped with a 3 inch stamped brass tablet
 - left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES
Not to Scale

All distances are horizontal to nail in side of tree

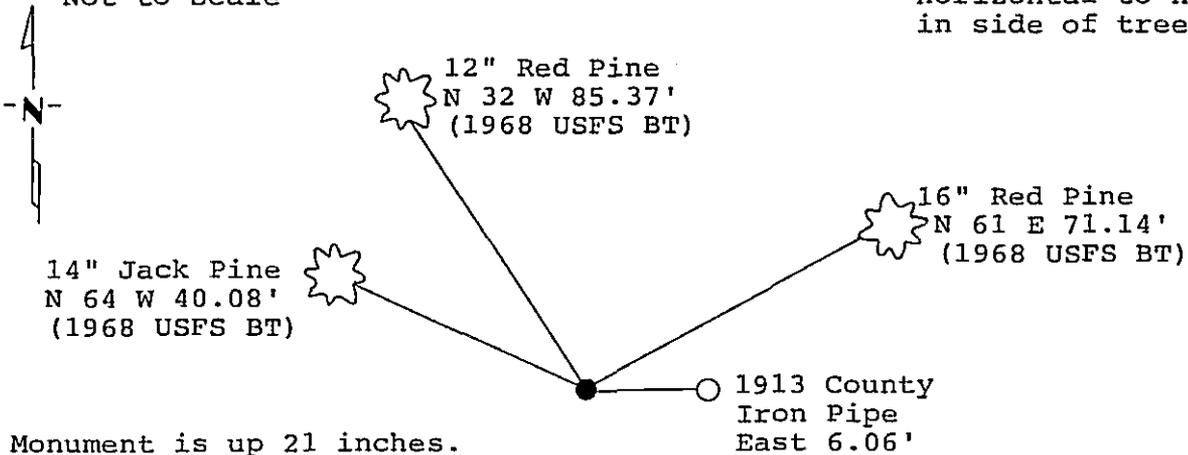

Monument is up 21 inches.

- 6' steel sign post North 6.5'
- 8' steel sign post North 5.0'
- 8' steel sign post West 5.0'

MONUMENT STAMPED:
T141N R27W
SC
S35/S36
S1
T140N
1968
RLS No. 6807

All bearing trees are scribed, painted with red enamel and marked with a 54-3 (bearing tree) tag.

Statement of evidence relative to this corner location is on back of page.

357322

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

Terry L. Freeman
Terry L. Freeman
Date 5/14/94 Registration No. 21367

OFFICE OF THE COUNTY RECORDER
County of CASS

I hereby certify that this document was filed in the Co. Recorders office at 12:00 P. M. on the 4th day of MAY A.D., 1994

County Recorder Claudine Kaylar
By A.S. Deputy
DOCUMENT NO. 357322

Statement of Evidence:

Southeast corner, Section 35, Township 141
North, Range 27 West, Cass County, Minnesota

Z-21

1864 Johnson and Thornton, U.S. Deputy Surveyors, originally established this corner position while running the south line of Township 141 North, Range 27 West. The notes indicate that they set a wood post and marked the following bearing trees: a 14 inch Yellow Pine North 75 degrees West a distance of 21 links (13.86 feet); and a 14 inch Aspen North 46 degrees East a distance of 26 links (17.16 feet).

1912 Cass County Surveyor's Office Record Book "A", Page 503, shows a survey by John Curo. The notes indicate that he found the following bearing trees: a 14 inch Yellow Pine North 75 degrees West a distance of 13.9 feet; and a 14 inch Aspen (stump) North 46 degrees East a distance of 17.2 feet. He set a 3 inch by 3 inch by 36 inch pitch Pine stake and marked the following new bearing trees: a 12 inch Norway Pine North 65 degrees 15 minutes West a distance of 19.42 feet; and a 24 inch White Pine (stump) North 9 degrees 15 minutes East a distance of 58.85 feet.

1938 Civilian Conservation Corps notes at Minnesota Department of Natural Resources Washburn Lake Ranger Station, Book 5, Page 64, show that they found a 4 inch wood stake at 5343.5 feet from the Northeast corner of Section 3, Township 140 North, Range 27 West.

1959 John Stark prepared the plat of "TRELIFE SHORE", on file in the Cass County Recorder's Office, which shows the Southeast corner of Section 35 as an iron pipe in place.

1968 United States Forest Service notes for Township 141 North, Range 27 West, in Book 2, Page 4, on file in office at Cass Lake, Minnesota, show that United States Forest Service Technicians found the following: a scribed stump for the 14 inch Yellow Pine North 75 degrees West a distance of 13.9 feet; a well-defined stump hole and pieces of rotted Aspen for the 14 inch Aspen North 46 degrees East a distance of 17.16 feet; the point of the original Oak stake; the stump for the 12 inch Norway Pine north 65 degrees 15 minutes West a distance of 25.0 feet; the stump for the 24 inch White Pine North 9 degrees 15 minutes East a distance of 58.8 feet; and a 1 and 1/2 inch iron pipe. They set a 2 inch by 5 foot galvanized steel pipe filled with concrete and capped with a 3 inch stamped brass tablet and marked the following new bearing trees: a 12 inch Red Pine North 62 degrees East a distance of 71.5 feet; a 6 inch Red Pine north 45 degrees West a distance of 85.5 feet; and a 9 inch Jack Pine North 66 degrees West a distance of 40.0 feet.

1968 William Okerman, Registered Land Surveyor Number 6807, filed an "Affidavit As To Location Of Government Corner" showing the 1968 United States Forest Service information.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Southeast corner, Section 35, Township 141 North,
Range 27 West, Cass County, Minnesota

Z-21

1977 Minnesota Department of Natural Resources notes indicate that their crews found the brass cap monument and ties as marked by the United States Forest Service in 1968. They also found evidence of the original corner and bearing trees.

1984 United States Forest Service notes for Township 141 North, Range 27 West, in Book 1, Page 45, on file in office at Cass Lake, Minnesota, show that United States Forest Service Technicians found the following: 1968 monument with the 1913 monument being 6.06 feet East; original Red Pine snag North 70 degrees West a distance of 13.88 feet; the 1913 White Pine (stump) North 71 degrees West a distance of 25.25 feet; the 1913 White Pine (stump) North 5 degrees East a distance of 59.62 feet; the 1968 Red Pine, now 14 inches, North 61 degrees East a distance of 71.14 feet; the 1968 Jack Pine, now 12 inches, North 64 degrees West a distance of 40.08 feet; the 1968 Red Pine, now 9 inches, North 32 degrees West a distance of 85.37 feet; the 1968 steel sign post North a distance of 6.5 feet. They placed two new steel sign posts North a distance of 5.0 feet and West a distance of 5.0 feet.

1993 on December 14, a Landecker & Associates, Inc. survey crew found a 2 inch iron pipe with brass cap up 21 inches and the original bearing tree snag at bearing and distance. The bearing trees are marked and steel sign posts in place as noted on front of this certificate.

Landecker & Associates, Inc. accepts this monument as a perpetuation of the original corner position.