

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Witness corner to MC #30

on the east line XXXXX of Section 28, Township 142N, Range 26W, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On 11/30/94 found a Nothing
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 1/27/95 placed a 2 1/2" x 48" Dia. Galvanized iron monument with a 3" Dia. Brass Cap stamped to identify the corner - 14" above ground
DATE


MAGNETIC: 2° E. DECL.

SKETCH OF REFERENCE TIES
NOT TO SCALE

BRASS CAP MARKED:



LITTLE SAND LAKE

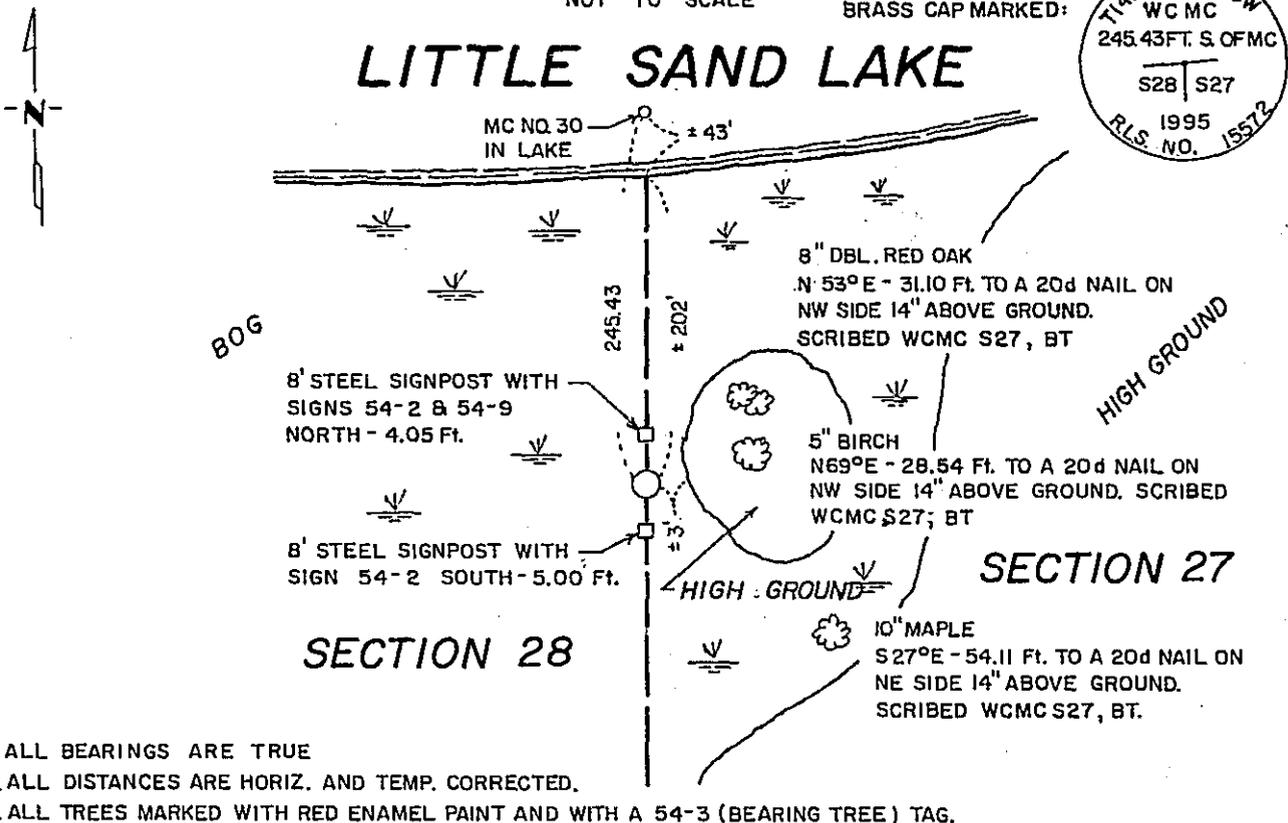

ALL BEARINGS ARE TRUE
ALL DISTANCES ARE HORIZ. AND TEMP. CORRECTED.
ALL TREES MARKED WITH RED ENAMEL PAINT AND WITH A 54-3 (BEARING TREE) TAG.

Statement of evidence relative to this corner location is on back of page. 365505

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

Lowell G. Schellack

Date 3/21/95 Registration No. 15572

OFFICE OF THE COUNTY RECORDER
County of CASS

I hereby certify that this document was filed in the Co. Recorders office at 2:45 P.M. on the 21st day of MARCH A.D., 1995

County Recorder Claudine Kaplan
By N.O., Deputy

DOCUMENT NO. 365505

Statement of Evidence: MEANDER CORNER NUMBER 30 ON THE EAST LINE OF SECTION 28, TOWNSHIP 142 NORTH, RANGE 26 WEST OF THE 5th PRINCIPAL MERIDIAN.

The original public land survey was run in 1872 by Griffin. A post was set to mark the corner and two bearing trees were marked and recorded as accessories; A 6" W. Pine that bears S34°W-21 links(13.86 feet); and a 10" spruce that bears S24°E-10 links(6.60 feet). The notes of this survey are on file in the office of the Secretary of State, St. Paul, MN.

On November 30, 1994 Lowell Schellack, RLS, Tom Miller, RLS, and Jon Larson of Schellack Engineering and Land Surveying were at the corner. A search area was established by traversing in a cardinal direction north 1425.60 feet, the record bearing and distance, from the southwest corner of Section 27. The record distance falls 43 feet, plus or minus, in Little Sand Lake. A search at the shoreline was conducted, a boggy & swampy area, but no evidence was found of the original corner or accessories.

After analysis of the above information, the corner is determined to be lost. It was decided to reset the corner from the southwest corner of Section 27 using the original bearing(cardinal north) and distance(1425.60 feet). The position of the corner falls in the Little Sand Lake, therefore, a witness corner to Meander Corner #30 was set as shown. USFS Contract, 1994-95.

For additional information, contact the Cass County Surveyor's Office in Walker, MN.