


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Meander Corner on the east shore of Knights Lake, common to Sections 13 and 24, Township 142 North, Range 26 West, of the Fifth Principal Meridian, Cass County, Minnesota.

July, 1997, Northern Lights Surveying and Mapping, Inc. monumented a witness corner 25.000 meters easterly of the meander corner position established on line between the northeast and northwest corners of Section 24 and at record distance from the calculated northeast corner of Section 24.

**SKETCH OF REFERENCE TIES & EVIDENCE
T.142N., R.26W.**

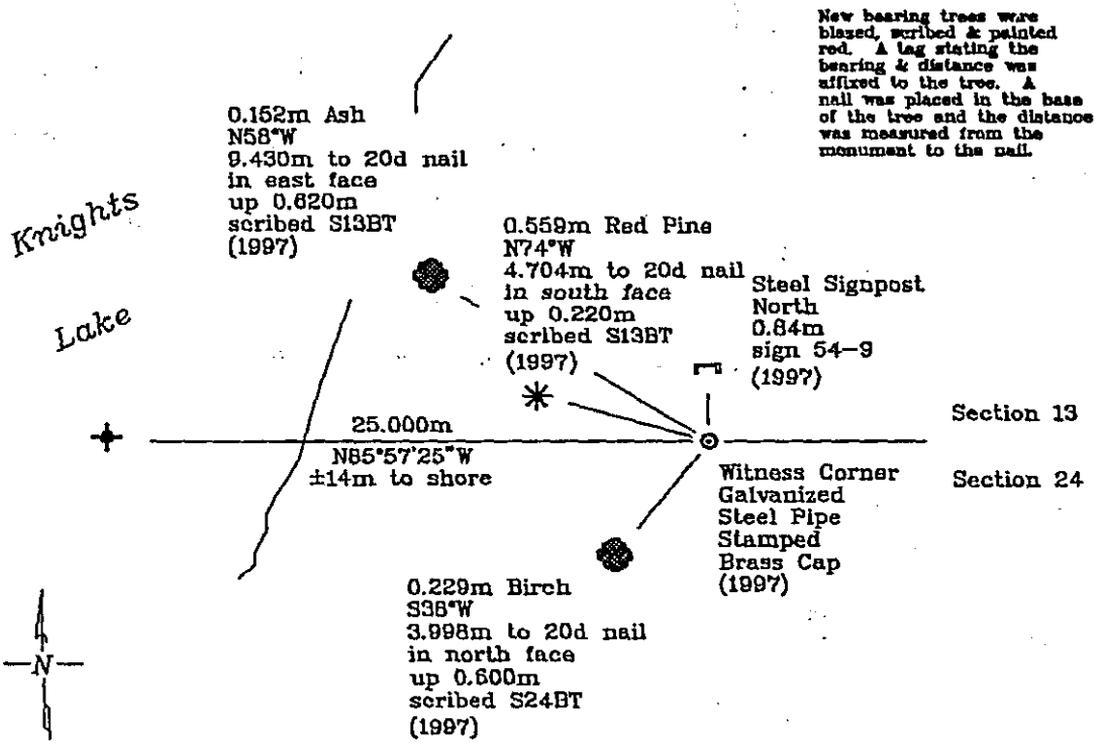

New bearing trees were blazed, scribed & painted red. A tag stating the bearing & distance was affixed to the tree. A nail was placed in the base of the tree and the distance was measured from the monument to the nail.

NOT TO SCALE
Bearings are Grid North, Minnesota Central Zone, measured with a hand compass adjusted to 3° East declination.



395065

Statement of evidence relative to this corner location is on the back of this page

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.
LoVe Develly
LaVerne Leueffing Date 11-16-97
Registered Land Surveyor No. 16089
NORTHERN LIGHTS SURVEYING & MAPPING

OFFICE OF THE COUNTY RECORDER
County of Cass
I hereby certify that this document was filed in the Recorder's office.
Time: 3:42 P.M. Date: Dec. 8, 1997
Recorder Claudine Kaylor
By L.S. Deputy
DOCUMENT NO. 395065

Statement of Evidence

Meander Corner on the east shore of Knights Lake, common to Sections 13 and 24, Township 142 North, Range 26 West, of the Fifth Principal Meridian, Cass County, Minnesota. 1872; General Land Office (G.L.O.) survey notes; Deputy Surveyor E.W. Griffin set a wooden post for the meander corner and referenced it with the following:

| | |
|-------------------------|--------------------------|
| 8" Norway Pine (0.203m) | 24" Norway Pine (0.610m) |
| N05°E | N01°E |
| 10 Links (2.012m) | 14 Links (2.816m) |

Said records are on file with the Secretary of State, St. Paul, Minnesota; copies of these records are on file with the Cass County Surveyor's Office, Walker, Minnesota.

October 23, 1963; United States Department of Agriculture-Forest Service (U.S.D.A.) T.142N., R.26W. Field Book #2, p.76; survey technician noted that he ran east across Knights Lake from the section corner common to Sections 13, 14, 23, and 24, and searched for G.L.O. evidence with no success.

November 7, 1996; Northern Lights Surveying and Mapping, Inc. crew of Smith and Berg traversed to a calculated search position from the west side of Knights Lake. No evidence was found.

July 17, 1997; Northern Lights Surveying and Mapping, Inc. crew of Smith and Gerving monumented a witness corner to the meander corner common to Sections 13 and 24 25.000m easterly, on line, between the northwest corner of Section 24 and the northeast corner of Section 24, from the proportioned meander corner position. They set a 1.219m long, 0.051m diameter galvanized steel pipe with a 0.083m diameter stamped brass cap, up 0.350m, and referenced it with the following:

| | | | |
|--------------------|--------------------|--------------------|----------------|
| 0.152m Ash | 0.559m Red Pine | 0.229m Birch | Steel Signpost |
| N58°W | N74°W | S38°W | North |
| 9.430m to 20d nail | 4.704m to 20d nail | 3.998m to 20d nail | 0.84m |
| in east face | in south face | in north face | sign 54-9 |
| up 0.620m | up 0.220m | up 0.600m | |
| scribed S13BT | scribed S13BT | scribed S24BT | |

Northern Lights Surveying and Mapping, Inc. Slater Township Field Book #3, p.57.

Coordinates:

Itasca County North

Northing = 64,295.36 meters
Easting = 175,187.13 meters

State Plane Coordinate System
Minnesota North Zone
NAD 83

Northing = 394,290.54 meters
Easting = 825,315.86 meters

Latitude = 47°06'26.54629" North
Longitude = 93°54'59.31565" West