


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner, Section 23, Township 143 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota.

December 6, 1999; Northern Lights Surveying and Mapping, Inc., (NLSM) set a brass capped galvanized steel monument for the quarter corner between sections 23 and 24. The corner was set "lost" midway and on line between the NE and SE corners of Section 23.

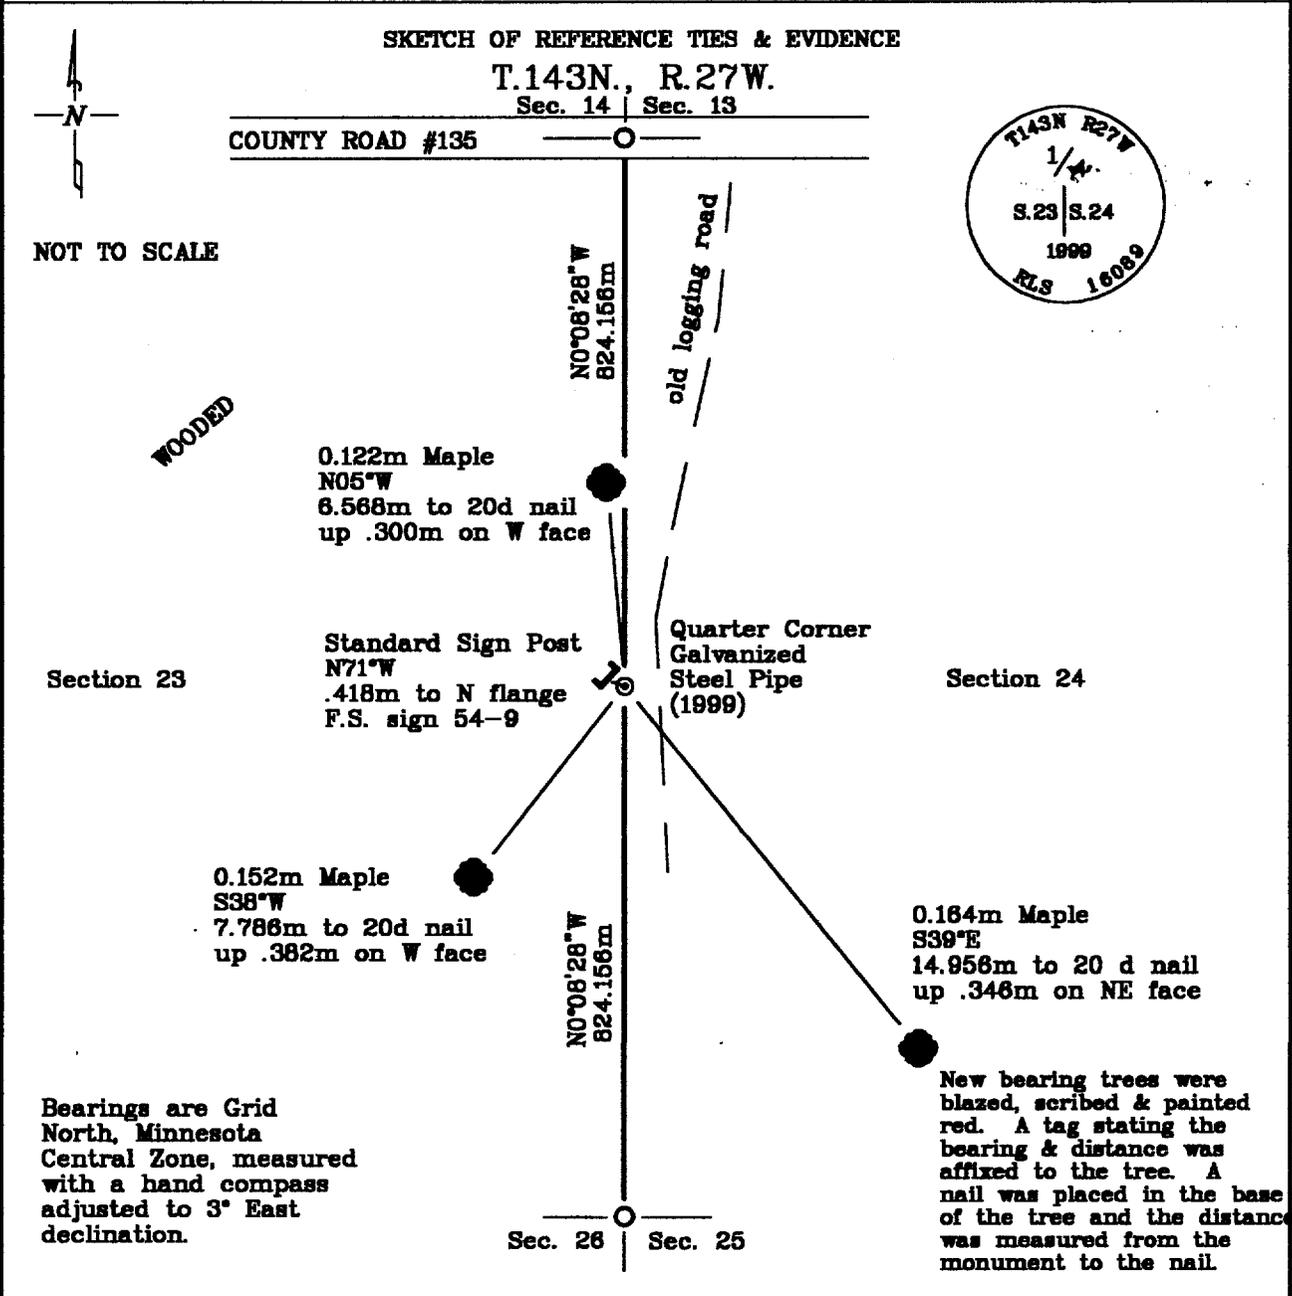

Statement of evidence relative to this corner location is on the back of this page

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

LaVerne Lemelling 5-13-99
Date

LaVerne Lemelling
Licensed Land Surveyor No. 16089
NORTHERN LIGHTS SURVEYING & MAPPING, INC.

OFFICE OF THE COUNTY RECORDER 412851
County of Cass

I hereby certify that this document was filed in the Recorder's office.

Time: 11:50 A.M. Date: May 17, 1999

Recorder Claudine Kayler

By K.F. Deputy

DOCUMENT NO. 412851

Statement of Evidence

East Quarter Corner, Section 23, Township 143 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota.

September, 1873; General Land Office (G.L.O.) survey notes; Deputy Surveyor William Allen set a wooden post for the quarter corner and referenced it with the following:

12" (0.305m) Elm	10" (0.254m) Fir
N25°E	N12°W
22 Links (4.426m)	32 Links (6.437m)

Said records are on file with the Secretary of State, St. Paul, Minnesota; copies of these records are on file with the Cass County Surveyor's Office, Walker, Minnesota.

1989; United States Department of Agriculture - Forest Service (U.S.D.A.-F.S.) T.143N: R.27W. Field Book #1, p. 9; Curt Krause searched a burned area but found no evidence.

Date unknown; U.S.D.A.-F.S. T.143N. R.27W. Field Book #1, p. 9; an unsigned, undated entry noted that the county had brushed a line running north and south, and that a "blue" line ran east. Fence corner west of squared Aspen 12" (0.305m), logging trail east of fence corner approximately 100 feet (30.480m). Blazes on squared Aspen about 10 years old.

October 22, 1998; Northern Lights Surveying and Mapping, Inc., crew of Foster and Brunner cruised to the area from County Road #135 down an old logging trail. The crew established two control points, GPS'd their position, and searched the area for G.L.O. evidence. None was found at this time.

January 6, 1999; NLSM crew of Heinle and Brunner made an additional search with no recovery and monumented the quarter corner position at the "lost" position with a 0.051m diameter, 1.219m long galvanized steel pipe .220m above ground with a brass cap, and established the following references:

0.122m Maple	0.164m Maple	0.152m Maple
N05°W	S39°E	S38°W
6.588m to 20d nail up .300m on W face	14.956m to 20 d nail up .348m on NE face	7.786m to 20d nail up .382m on W face
	Standard Sign Post	
	N71°W	
	.418m to N flange	
	F.S. sign 54-9	

Northern Lights Surveying and Mapping, Inc., Boy River Township Field Book #2, p.62.

Coordinates:

Cass County North

Northing = 73351.221 meters
Easting = 164939.150 meters

State Plane Coordinate System
Minnesota Central Zone
NAD 83

Northing = 343342.127 meters
Easting = 815064.803 meters

Latitude = 47°11'20.75977" North
Longitude = 94°03'04.42391" West