



CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


Northeast Corner, Section 34, Township 143 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota.

December 8, 1998; Northern Lights Surveying and Mapping, Inc., (NLSM) accepted a found iron pin as a perpetuation of the General Land Office corner & replaced it with a brass capped galvanized steel pipe.

**SKETCH OF REFERENCE TIES & EVIDENCE
T.143N., R.27W.**



NOT TO SCALE

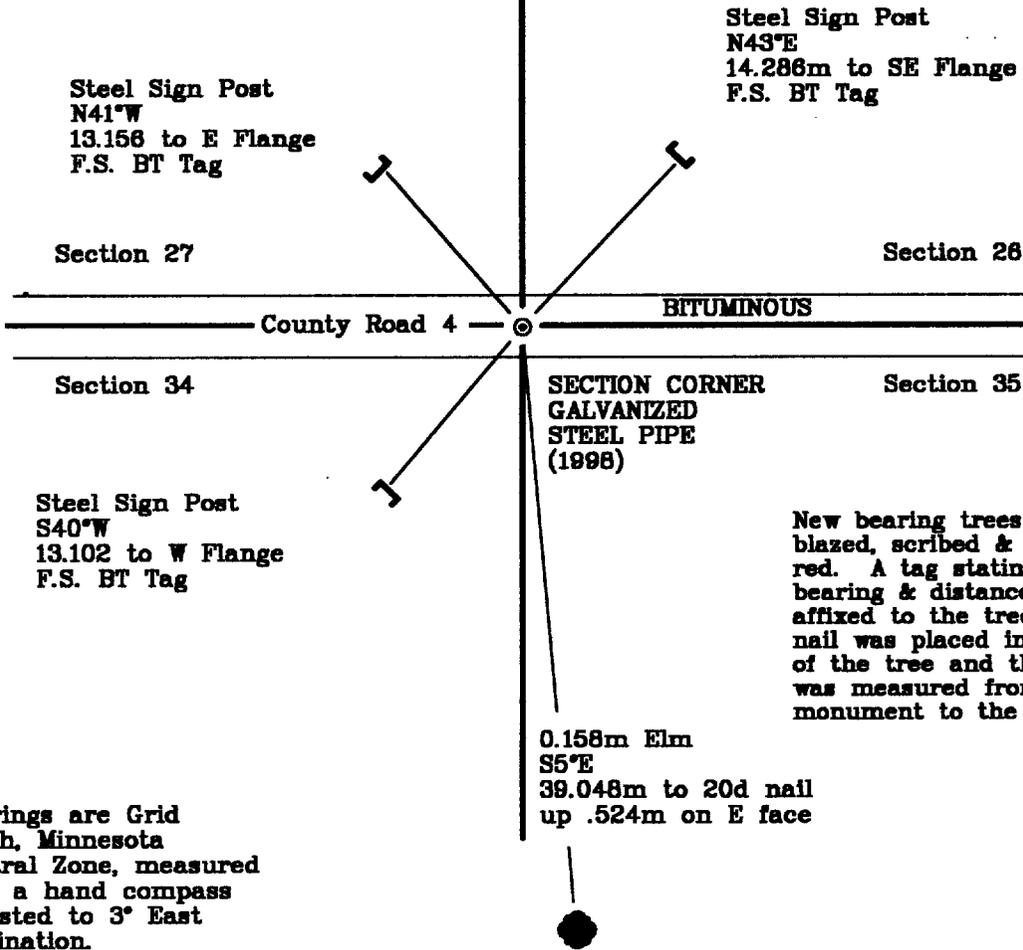

Bearings are Grid North, Minnesota Central Zone, measured with a hand compass adjusted to 3° East declination.

Statement of evidence relative to this corner location is on the back of this page

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

LaVerne Leuchling 5-13-99
 LaVerne Leuchling Date
 Licensed Land Surveyor No. 18089
 NORTHERN LIGHTS SURVEYING & MAPPING, INC.

OFFICE OF THE COUNTY RECORDER 412863
 County of Cass

I hereby certify that this document was filed in the Recorder's office.

Time: 12:50 P.M. Date: May 17, 1999
 Recorder Claudine Kayler
 By K.F. Deputy
 DOCUMENT NO. 412863

Statement of Evidence

Northeast Corner, Section 34, Township 143 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota.

September, 1873; General Land Office (G.L.O.) survey notes; Deputy Surveyor William Allen set a wooden post for the section corner and referenced it with the following:

12" (0.305m) Tamarack	7" (0.178m) Tamarack	6" (0.152m) Tamarack	6" (0.152m) Tamarack
S40°W	S13°E	N11°W	N89°E
15 Links (3.018m)	13 Links (4.290m)	15 Links (3.018m)	11 Links (2.213m)

Said records are on file with the Secretary of State, St. Paul, Minnesota. Copies of these records are on file with the Cass County Surveyor's Office, Walker, Minnesota.

February, 1915; Cass County Record Book "B", Survey Record #328, pp. 456-462; Curo and Donner found the southeast, northwest, and northeast original G.L.O. bearing trees, from which they placed a cedar hub. Their distance to the N1/4 of Section 35 was 2676.30 and their distance to the N1/4 of Section 34 was 2679.90 feet.

August 1997: A USDA-Forest Service crew of C. Krause and R. Main ran a resource grade GPS observation at a pin in the pavement of County Road #4.

September 1998: Northern Lights Surveying & Mapping crew of Heinle & Carlson tied into an iron pin in County Road #4 which lined up with occupation and a 3"± kink in road alignment.

October, 1998; Northern Lights Surveying and Mapping, Inc., and Cass County crews excavated a 3'x 15'x 3' deep search area to natural ground. No evidence was found.

December 8, 1998; NLSM crew of Heinle and Carlson returned replaced the found pin with new 0.015m diameter galvanized steel pipe 0.610m long for the section corner below the bituminous and in the centerline of County Road #4. The following references were then established:

0.158m Elm	Steel Sign Post	Steel Sign Post
S5°E	N43°E	N41°W
39.048m to 20d nail	14.286m to SE Flange	13.156 to E Flange
up .524m on E face	F.S. BT Tag	F.S. BT Tag
Steel Sign Post		
S40°W		
13.102 to W Flange		
F.S. BT Tag		

The pin was accepted as being nearly synonymous with the corner position recovered by Curo & Donner in 1915, the position having been perpetuated by virtue of the roads being laid down their subsequent cut true line.

Northern Lights Surveying and Mapping, Inc. Boy River Township Field Book #4, p. 8.

Coordinates:

Cass County North

Northing = 70839.215 meters
Easting = 163330.238 meters

State Plane Coordinate System
Minnesota Central Zone
NAD 83

Northing = 340,829.564 meters
Easting = 813,456.936 meters

Latitude = 47°09'59.52536" North
Longitude = 94°04'21.06453" West