


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


Quarter Corner common to Section 4, Township 142 North, Range 27 West and Section 33, Township 143 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota. October, 1998 Northern Lights Surveying and Mapping, Inc. set a Brass Capped Galvanized Pipe to replace the found 1 1/2" iron pipe.

**SKETCH OF REFERENCE TIES & EVIDENCE
T.143N., R.27W.**



NOT TO SCALE

New bearing trees were blazed, scribed & painted red. A tag stating the bearing & distance was affixed to the tree. A nail was placed in the base of the tree and the distance was measured from the monument to the nail.

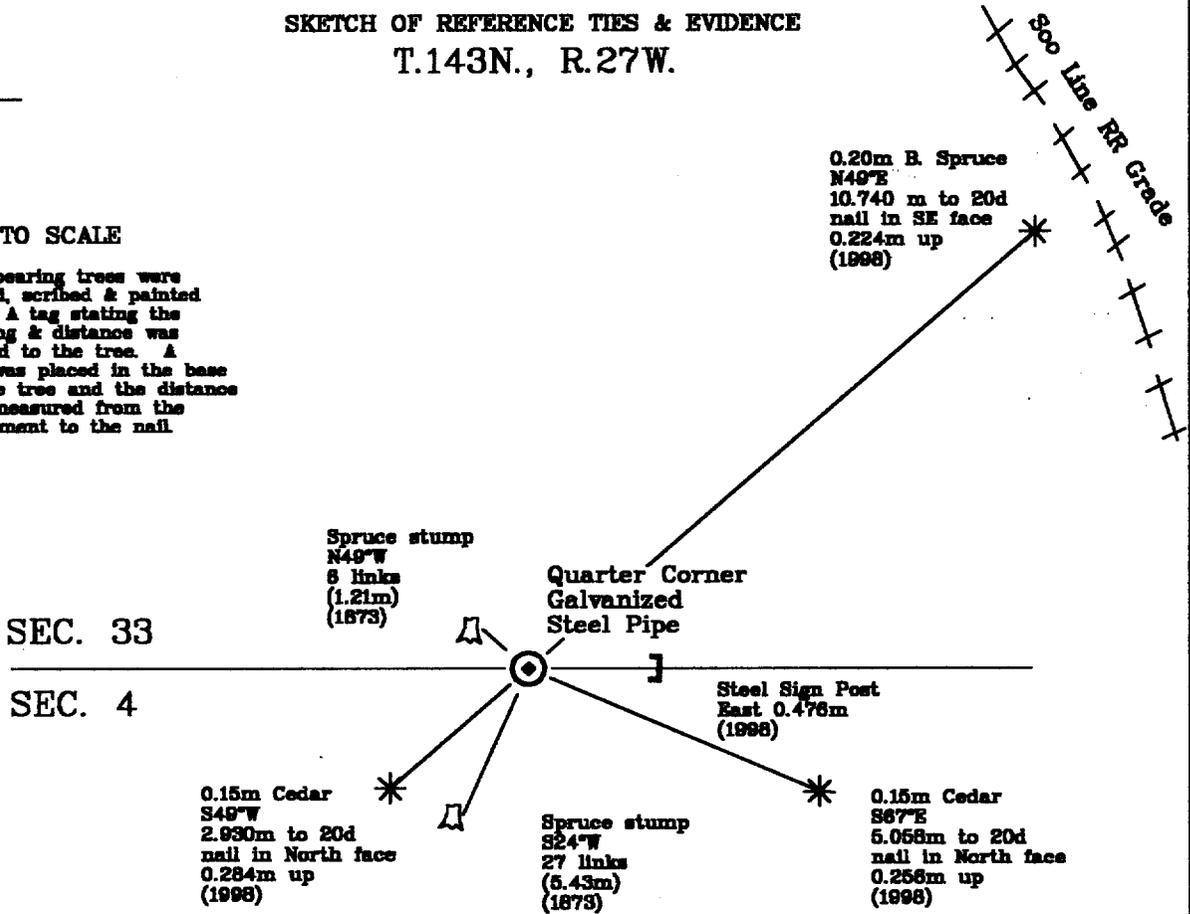

Bearings are Grid North, Minnesota Central Zone, measured with a hand compass adjusted to 3° East declination.

T.142N., R.27W.



Statement of evidence relative to this corner location is on the back of this page

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Joseph Foster 5-14-99
Joseph Foster Date

Licensed Land Surveyor No. 25342
NORTHERN LIGHTS SURVEYING & MAPPING, INC.

OFFICE OF THE COUNTY RECORDER 412868
County of Cass

I hereby certify that this document was filed in the Recorder's office.

Time: 1:15 P.M. Date: May 17, 1999
Recorder Claudine Taylor
By K.F. Deputy
DOCUMENT NO. 412868

Statement of Evidence

Quarter Corner common to Section 4, Township 142 North, Range 27 West and Section 33, Township 143 North, Range 27 West, of the Fifth Principal Meridian, Cass County, Minnesota.

September, 1873; General Land Office (G.L.O.) survey notes. Deputy Surveyor William Allen set a wood post for the quarter corner and referenced it with the following:

6" Spruce	6" Spruce
N49°W	S24°W
6 links (1.207m)	27 links (5.432m)

Said records are on file with the Secretary of State, St. Paul, Minnesota. Copies of these records are on file with the Cass County Surveyor's Office, Walker, Minnesota.

March, 1903 U.S. Army Corps of Engineers, R.C. Smith found a 6" Cedar with markings plain - note indicates the corner is false. Book 355 page 3.

April, 1903 U.S. Army Corps of Engineers, B.E. Trask found a BT marked N49°W and other six inch spruce stumps between sections 33 and 4. According to their stadia traverse, computed distance to the NW corner of section 4 was 780.984m and was 804.267m to the NE corner of section 4.

Records from the United States Army Corps of Engineers were reproduced at the National Archives Great Lakes Region, Record Group 77, Records of the Office of the Chief of Engineers.

1910± The Soo Line Track Map shows that this corner lay 1204 feet (366.980m) from the centerline of their tract and the township line formed a northwesterly angle of 40°12' to the track. They indicated that the corner was 2900 feet (883.922m) from the NE corner of section 4.

March, 1935 Civilian Conservation Corps (CCC) notes by G. Sherman, Form 874 found:

10" Elm	10" Elm
South	West
40 links (8.047m)	3 links (0.604m)
	location poster

CCC showed corner 1226 feet (373.77m) from centerline and 798.236m from the NW corner of section 4, with an angle at the track of 53°.

November, 1970 United States Department of Agriculture - Forest Service (U.S.D.A.-F.S.) Curtis Krause chained to the quarter corner location and found nothing.

October 5, 1998, Northern Lights Surveying and Mapping, Inc. Leuelling and Heinle, searched approximate location and found nothing. They ran 2 G.P.S. sessions.

October 26, 1998, Northern Lights Surveying and Mapping, Inc. Leuelling and Heinle found a 1 1/2" Iron pipe for the quarter corner with remains of the original G.L.O. Bearing Trees at bearing and distance. They added the following references:

0.20 Black Spruce	0.15m Cedar	0.15m Cedar	Standard Sign Post
N49°E	S67°E	S49°W	East
10.740m to nail	5.058m to nail	2.930m to nail	0.476m
in South face	in North face	in North face	F.S. sign 54-9
0.224m up	0.256m up	0.264m up	

The corner fell 364.63m from the centerline of the Soo Line Railroad bed, 813.250m from the NE corner of section 4, and 898.828m from the NW corner of section 4.

October 28, 1998, Northern Lights Surveying and Mapping, Inc. Heinle and Brunner set a Brass Capped 0.15m diameter by 1.219m long galvanized steel pipe in the place of the found 1 1/2" iron pipe.

Northern Lights Surveying and Mapping, Inc. Boy River Township Field Book #4, p65-68

Coordinates:

Cass County North

Northing = 69290.443 meters
Easting = 180910.356 meters

State Plane Coordinate System
Minnesota Central Zone
NAD 83

Northing = 339279.880 meters
Easting = 811037.760 meters

Latitude = 47°09'09.50513" North
Longitude = 94°06'16.06195" West